

Design. Build. Aluminum.

Turnkey aluminum
solutions

Eye-catching design

Little to no maintenance

Made with experience



Download
Our Full Digital
Product
Catalog Here!

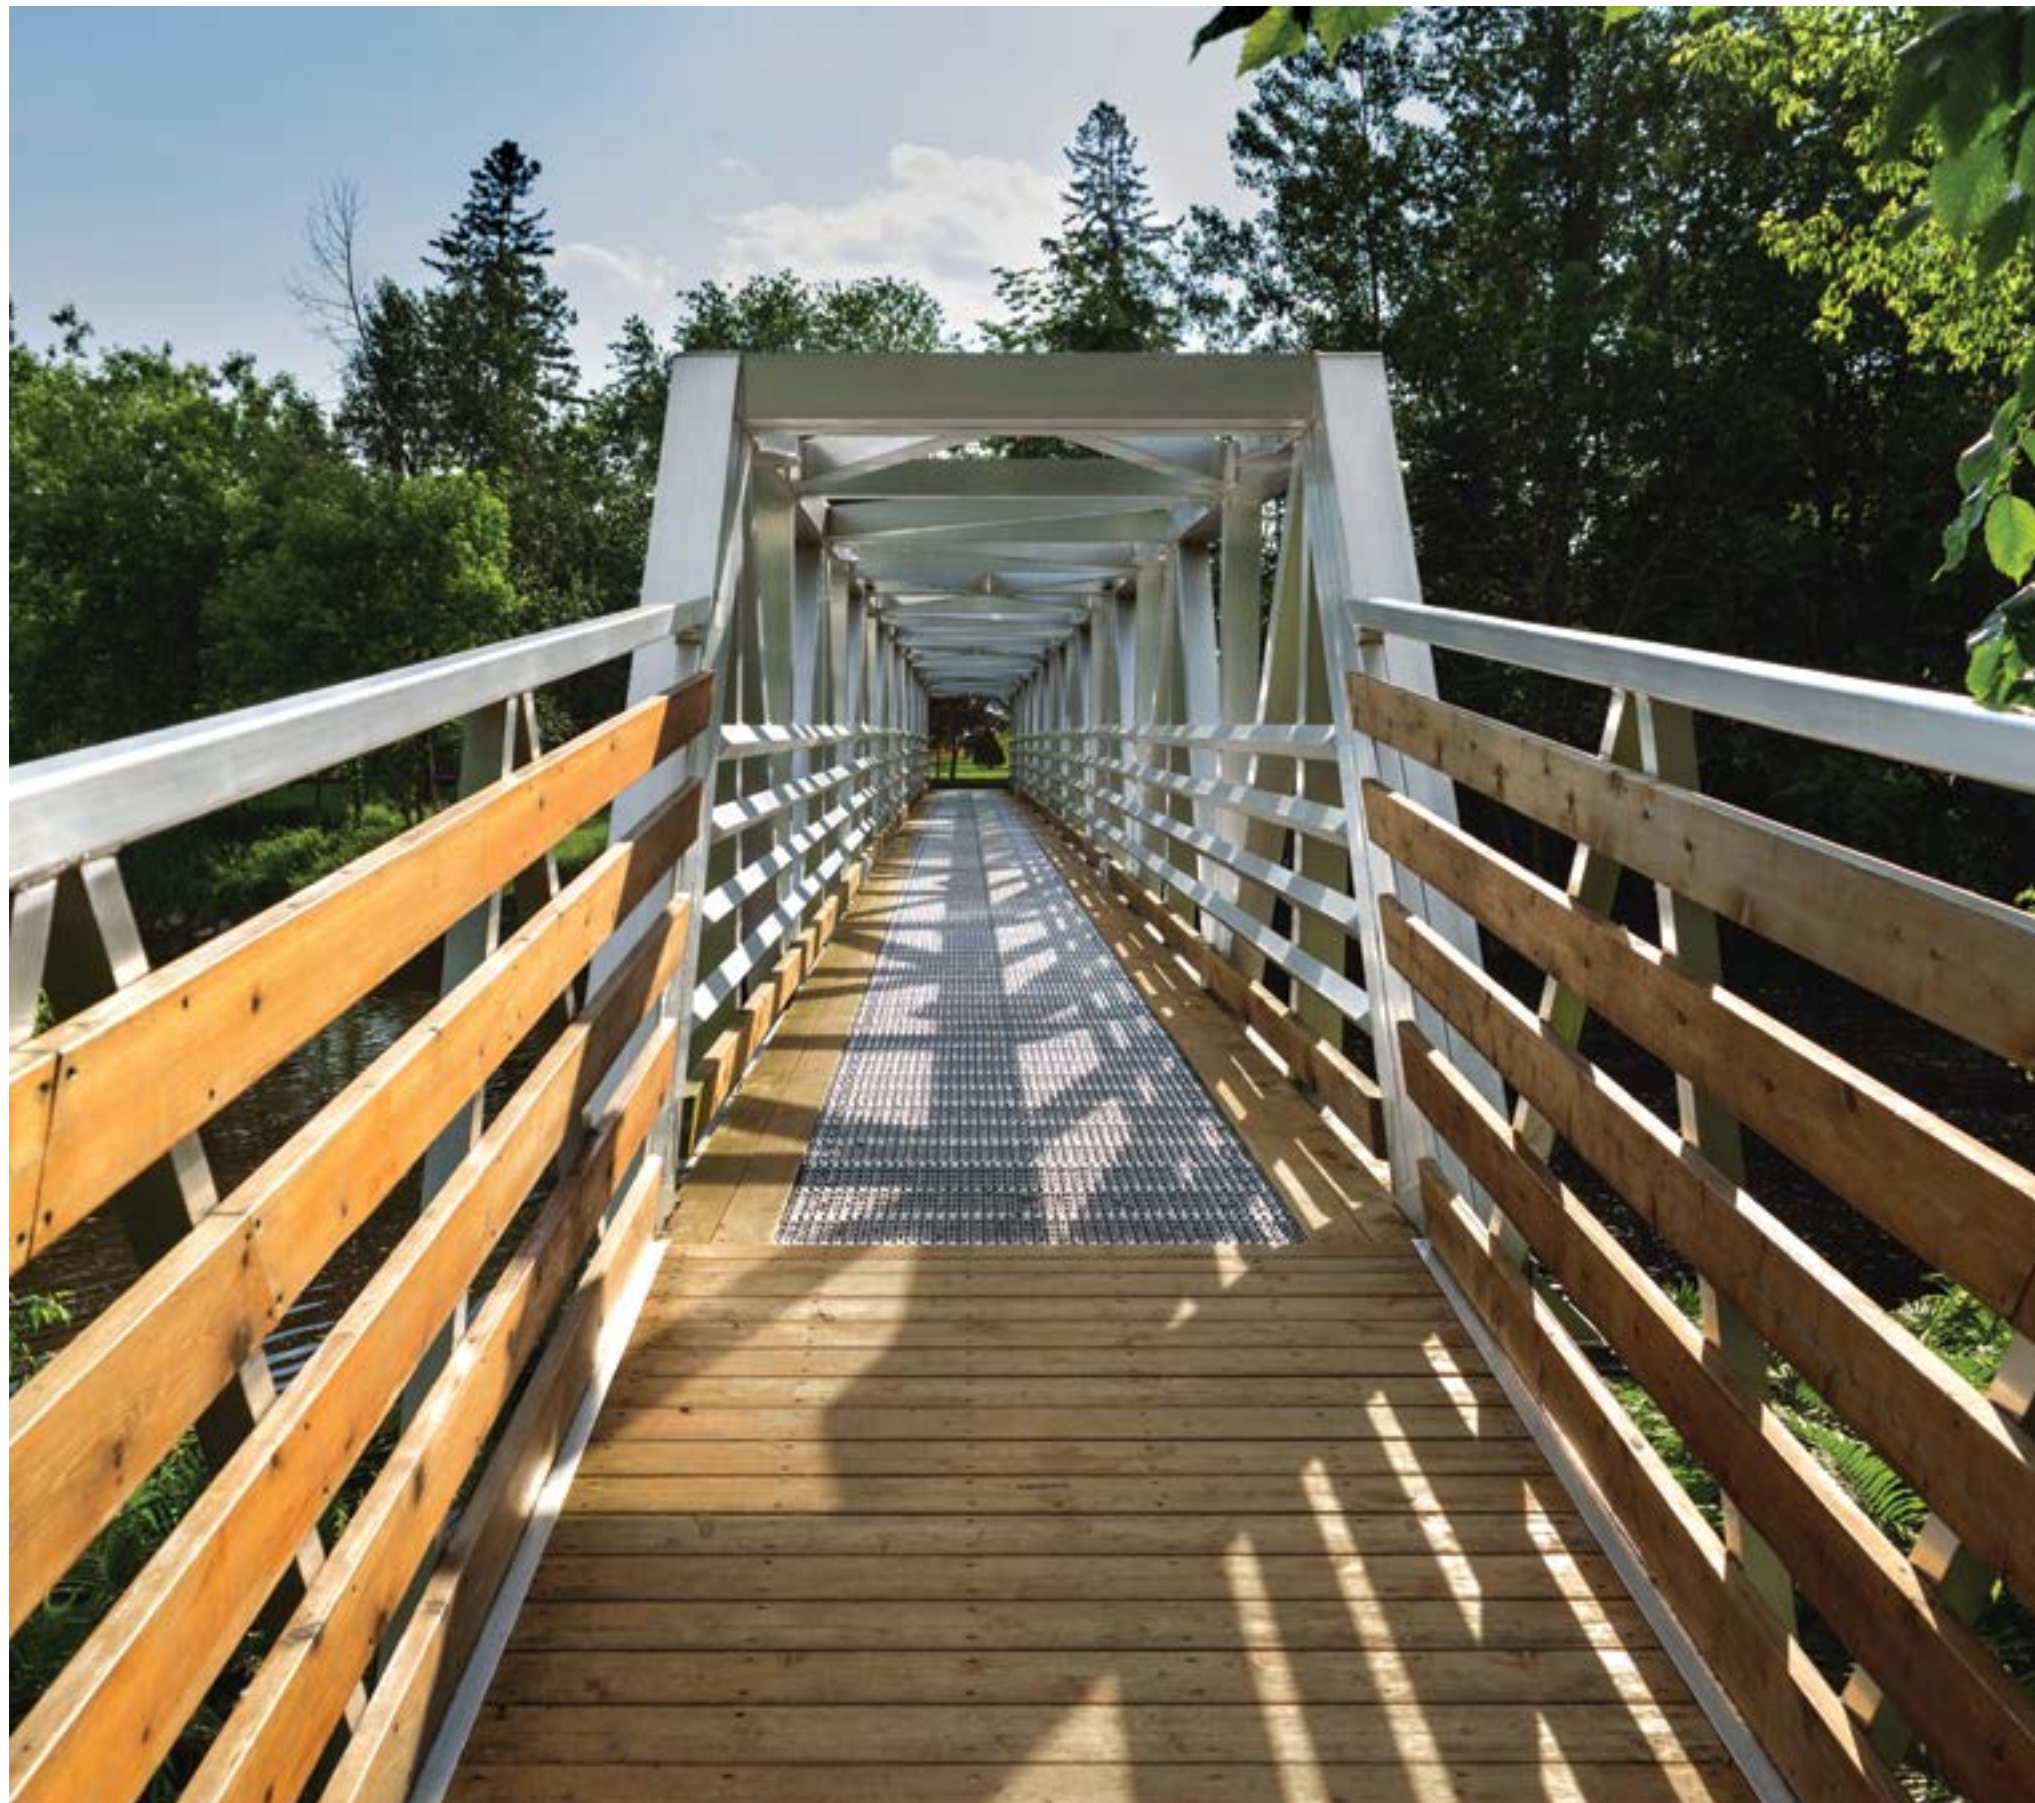


Table of Contents

About us	05	Aluminum Bridge Decking	136
Introducing MAADI Group	06	Specifications	143
Quality Management System	09	Customization	158
Highest Standards	10	Projects	164
At Your Service	13		
Choose Aluminum	14	Marinas	170
The Better Choice	16	Introduction	173
FAQ	19	Projects	175
. Environment and Human Health	20		
. Structural Integrity	24		
. Cost	28		
Pedestrian Bridges	30	Floating Docks	178
		Introduction	181
		Specifications	183
Custom Bridges	32	Our Systems	185
Introduction	35	Main Docks	186
Specifications	37	Finger Docks	188
Customization	44	Customization	194
Projects	56	Projects	210
. Parks and Recreation	58		
. Architecture	72		
. Industries	82		
. Bridge widening	90		
Bridge Kits	94	Anchoring Systems	220
Introduction	97	Deadman	225
Specifications	101	Piles	227
Destructive Structural Testing	109	H-Beam	229
Customization	112	Push-Arm	231
Projects	122		
. Parks and recreation	125		
. Architecture	133		
. Industries	135		

			03
Ferry Landings	232	Tactical and Emergency Bridges	304
Introduction	235	Introduction	307
Projects	237	Our Bridges	309
		Lightweight Bridges	310
		Specifications	313
		Fast Assembly	314
		Bridge in a Box	318
Floating Wave Attenuators	240	Modular Bridges	320
Introduction	243	Specifications	323
Specifications	245	Fast Assembly	326
		Bridge in a Box	330
		Custom Trailer	332
Gangways	246		
Custom Gangways	248	Varied Structures	336
Specifications	253	Introduction	339
Customization	258	Projects	340
Projects	264	. Stairs	343
		. Canopies	345
		. Display panels	347
		. Work platforms	349
		. Lifting Equipment	352
Gangway Kits	280		
Specifications	283		
Customization	292		
Projects	298		





Since 2005, MAADI Group has specialized in structural design and building using hardwearing aluminum that lasts decades. Constantly innovating to maximize efficiency, our structures are maintenance-free and optimize aluminum's sustainable benefits to create products that contribute to a more eco-friendly environment.

Introducing MAADI Group

We provide our clients—municipalities, governments, construction, manufacturing, and more—with the best, most advanced structural designs and building solutions to fit their specific project.

Our first priority is to make sure that your vision and needs are top of mind as we work alongside you and your team throughout the design, planning and implementation phases.

Who we are

MAADI Group is an independent aluminum engineering design and building firm based in Canada. We provide our clients with the most hard-wearing products to meet the needs of the sustainable development, construction and manufacturing industries.

Our team

- Engineers
- Technicians
- 3D designers
- Project managers

What we do

Since 2005, MAADI Group has designed and built hundreds of structural extruded aluminum projects for clients around the world. Our vast technical expertise enables us to design innovative products and infrastructure that reduce weight, simplify transport and lower the total cost of ownership¹ (TCO), while maximizing strength and durability. Using functional and sustainable design principles, we apply the highest engineering and design standards on every project, meeting all local and national building and bridge codes.

MAADI Group aluminum pedestrian bridges, maritime structures and other distinctive engineering products are designed by top-grade engineers experienced in pony truss bridge design and top chord stability criteria, utilizing elastic lateral restraints. We use cutting edge technologies, CAD and 3D modeling to optimize our distinctive structures.

Our services

- Full engineering services
- Technical support and manufacturing services
- Planning
- Installation

¹ maadigroup.com/en/news/total-cost-of-ownership-aluminum-steel

Our mission

To provide planners, architects, builders, and developers with customized aluminum structures that are maintenance-free, durable, attractive, economical, and fully sustainable for generations to come.

Our values

Quality

All our aluminum structures meet the highest quality standards, from design to installation.

Innovation

We use the latest technology to deliver solutions that are both strong and unique.

Integrity

We stay true to who we are and to our commitment to providing exceptional products, tailoring everything we build to our clients’ requirements and needs.

Human relationship

We foster strong, lasting relationships with our clients through active listening and dialogue.

Our backstory

MAADI Group was founded in 2005 by Alexandre de la Chevrotière, IWE, P.E. After earning a degree in Mechanical Engineering with emphasis on Naval Architecture, Alexandre acquired over 30 years of experience working extensively with aluminum, including shipbuilding, NATO destroyer retrofits, and designing and manufacturing marinas and bridges.

Over the course of more than 20 years, MAADI Group has developed unparalleled knowledge in mechanical and structural engineering, specializing in designing aluminum bridges and structures for the civil, maritime, and military industries throughout North America and Asia.

Our clients

MAADI Group’s clients are based in the United States, the Caribbean, Canada and Asia.

- | | |
|--|-----------------------------------|
| - Shell Exploration | - St. Lawrence Seaway Corporation |
| - Syncrude | - Technomarine |
| - Marinetek | - SNC-Lavalin |
| - Davie | - Rio Tinto |
| - Canadian Armed Forces | - Parks Canada |
| - Public Works of Canada | - Cirque du Soleil |
| - Fluor Daniel | - City of Montréal |
| - AMEC Americas | - Turner Construction |
| - ARUP | - Maine Hydro |
| - The Jacques Cartier and Champlain Bridges Incorporated | - Rolls-Royce |
| - Seaspans Shipyards | - Bombardier |
| - Kokosing Construction Company | - SÉPAQ |

Precision manufacturing for specialized needs

MAADI Group operates two advanced production facilities totaling 44,000 sq ft (4,090 m²), where we deliver custom-engineered solutions with precision craftsmanship and rigorous quality standards. Our team of certified welders and machinists expertly handle complex projects for demanding industries like military and oil & gas. With two decades of pioneering aluminum applications, we lead in innovative structural designs, from bridges to floating docks.



Quality Management System

Quality
Excellence
Dependability

For MAADI Group, the notion of quality is both a set of rigorous processes and a sustained policy of reliability that makes us go above and beyond the needs of our customers. Whether it's the quality of our products and services or our competitive costs, our business culture is based on the following principles.

Active listening
MAADI Group remains attentive to its customers in order to offer personalized service and continuously increase its productivity. The company maintains its competitive position in the market while meeting or surpassing its customers' requirements as well as the standards and laws in effect.

Compliance standards
MAADI Group adheres to the international standard ISO 9001:2015. The company's philosophy is based on the adoption of quality objectives, action plans and preventive measures to continuously improve the quality of its products and services as well as its quality management system.
The company is also committed to providing the necessary resources to implement and maintain this system. To this end, all personnel whose duties have an impact on quality benefit from a continuous training program.

Healthy relationships
MAADI Group is committed to its philosophy based on communication, service with integrity and fairness. The company places its employees at the heart of its operations, and respects its responsibilities to the communities where it operates. The company is committed to optimizing its processes in order to reduce non-compliance and meet delivery deadlines.



Highest Standards

We work closely with our manufacturing partners to ensure that product quality standards are fully and consistently maintained throughout the design, production and installation process.

Codes and standards

At MAADI Group, all of our design specifications meet local, regional and national building codes and professional standards as required. All of our technical designs and calculations for our aluminum structures bear the seal of one of our engineers.

Canada

- CSA-S6-19 Canadian Highway Bridge Design Code
- CSA S157-17 Strength Design in Aluminum
- CSA W59.2-18 Welded Aluminum Construction
- CSA W47.2-11 (R2020) Certification of Companies for Fusion Welding of Aluminum

U.S.

- AASHTO Specifications for Design of Pedestrian Bridges
- AA ADM (2020) Aluminum Design Manual
- AWS D1.2/D1.2M (2014) Structural Welding Code – Aluminum
- Aluminum Standards and Data (AS&D)
- Americans with Disabilities Act (ADA)

International

- BS EN 1999-1-1:2007 + A2:2013 Eurocode 9: Design of aluminium structures - General structural rules

Certification

MAADI Group is certified in Division 1 for Fusion Welding of Aluminum per CSA Standard W47.2 of the Canadian Standards Association.

All our welders, welding operators and tack welders are governed by the Canadian Welding Bureau (CWB).

We carry general contractor licences from the [Régie du bâtiment du Québec \(RBQ\)](#).



Patents

MAADI Group owns eight patents, seven of which are for MakeABridge®, our weld-free aluminum pedestrian bridge and maritime gangway system.

Awards

MAADI Group is the proud winner of numerous awards, including the Extrusion Technology Foundation’s Design Competition Award in the structural category, which the company won a third time this year.

Partners

MAADI Group partners with Rio Tinto and Centre québécois de recherche et de développement de l’aluminium (CQRDA) to manufacture its award-winning MakeABridge® gangway design and the weld-free bridge decking system GuardDECK™.





At Your Service

We handle the construction of your structure from start to finish. Our qualified team of experts is ready and equipped to provide you with a wide range of services.

Analysis and evaluation

- Site data analysis
- Stress evaluation of aluminum structures
- Evaluation of pedestrian and vehicular loads and wind pressure
- Evaluation of vessel berthing loads and wind loads
- Evaluation of mooring line force
- Evaluation of pile capacity
- Wave load and wave attenuators analysis
- Stability and buoyancy calculations according to industry standards

Design and engineering

- Design and engineering of pedestrian bridges and maritime gangways
- Design, engineering and sizing of floating docks
- Marina layout design and plans
- Design of cleats and mooring bollards
- Welding procedure specifications
- Our team of experienced designers and draftsmen uses 2D and 3D software that can be adapted to the client's needs

Management and manufacturing

- A team dedicated to your project will work with you for your entire project or at specific stages, depending on your needs.
- Manufacturing is carried out in our production plant.

Installation

Installations are performed either by a local contractor supervised by MAADI Group or by one of our certified installers.

Inspection and qualification

Inspections are performed by one of our professional engineers to certify the compliance and safety of structures.

Choose Aluminum



The Better Choice

When strength counts

Corrosion-resistant

Durable

Long lifespan

The genesis of a new material

It was only toward the end of the 19th century that aluminum began to be used in engineering applications. In 1886, Paul Héroult, a French engineer, and Charles Hall, an American student, both independently discovered a cost-effective electrolytic production method. The process showed excellent results but required an enormous amount of electric power. Three years later, Karl Joseph Bayer, an Austrian chemist, invented a cheap and feasible alumina (aluminum oxide) production method. The processes that we use today are based on the Bayer and Hall-Héroult processes.

Three inventions would change the course of history

- Internal combustion engine vehicles.
- Electricity: Lightweight conductive metal was required for carrying electricity across great distances and for building cable towers to deliver electrical energy from power generation sites.
- Airplanes: Partnerships between the aviation and the aluminum industries would flourish for airframes, engines, missile bodies fuel cells and satellite components.

Largely due to its favourable properties, today aluminum is a key material used in many everyday objects and components in virtually all industries, including the food industry.

As automakers move to produce more electric vehicles, car batteries are becoming increasingly powerful—and accordingly, increasingly heavy. Using more aluminum to build vehicle frames helps offset this extra weight and makes it possible to produce the powerful eco-friendly vehicles for which there is growing demand.

Advantages

Aluminum offers excellent atmospheric corrosion resistance, durability, and a high strength-to-weight ratio compared with competing construction materials.

A total cost of ownership study¹ shows that decision makers should no longer assume that steel is the best option economically when investing in civil engineering structures.

Aluminum’s cost-saving benefits

- Aluminum is highly resistant to corrosion under the majority of service conditions, and no colored salts are formed to stain or discolor products it comes into contact with.
- Structural stiffness resists permanent deformation caused by live loads, climate or movement
- High strength-to-weight ratio for construction, which means greater strength and easier to handle
- Aluminum retains its strength at low temperatures and is often used for cryogenic applications
- Over its life cycle, aluminum is proven to be almost maintenance-free with no costly galvanizing or painting
- Easy to remove graffiti by simply brushing the bare metal
- Aluminum has an attractive, natural finish, which can be soft or shiny. It can be virtually any color or texture.
- Natural mill finish aluminum forms its own protective coating
- Easy to transport and install due to light weight (60% of equivalent steel structure)
- Easy to fabricate and extrude into infinite shapes

Sustainable

MAADI Group leverages the advantages of sustainable development to enhance the environment in every community where our structures are used. MAADI Group incorporates the sustainable design principles of energy conservation, use of recyclable materials, greater functionality and design flexibility to offer responsible products that last decades.

Environmental advantages

- Natural material requires no maintenance and meets environmental responsibility requirements.
- 100% recyclable, with high scrap value at the end of its useful life.
- Recycling aluminum scrap requires only 5% of the energy used to make new aluminum.
- Fully reusable upon deconstruction without any loss of strength or mechanical properties.
- Reduced energy use and pollution during transport due to light weight (60% of equivalent steel structure).

¹ maadigroup.com/en/news/total-cost-of-ownership-aluminum-steel



FAQ

Lightweight, recyclable aluminum is being used more and more often for all sorts of applications. You might be (pleasantly) surprised to learn about them!

Environment and Human Health

Does aluminum contribute to or help mitigate the effects of climate change?

Primary aluminum production is very energy intensive and can have negative impacts on the environment and climate. But, when put to use, aluminum can have very positive impacts on climate change because of its properties:¹

Lightweight

In the transportation industry, aluminum's light weight increases efficiency and reduces fuel consumption and emissions.²

Durable and corrosion-resistant

Aluminum can last much longer than other materials without any protective finishing. In fact, 75% of all aluminum ever produced is still in use, so its true environmental impact can only be calculated at its true end of life (and through a full life cycle analysis).³

Easily recyclable with a high scrap value

The aluminum content in certain products (like cars) encourages higher recycling rates.³ Creating new materials from recycled aluminum only requires 5% of the energy needed to produce primary aluminum. It's relatively easy to recycle and has a very high scrap value.

Infinite possibilities

Aluminum offers designers infinite possibilities for optimizing their products, both in terms of shape and properties (for example, architects can leverage aluminum's high reflectivity to keep a building from heating up in the sunlight).

Is aluminum more damaging to the environment than steel?

The answer depends on the application and what type of aluminum or steel you are comparing. Primary aluminum production is very energy intensive—the carbon footprint worldwide is estimated to be between 8 and 12 tons of CO₂ per ton of aluminum (depending how it is calculated and who you ask). Steel's carbon footprint is only about 2 tons of CO₂ for 1 ton of steel. However, depending on where the aluminum was made and with which energy source, aluminum's carbon footprint can be much lower. For example, in Canada, primary aluminum's carbon footprint is only 2.5 tons of CO₂ per ton of aluminum. Steel is also 3 times heavier than aluminum, which makes comparing “per ton” an unbalanced comparison.

Aluminum is extremely durable and easily recyclable. Recycled aluminum's carbon footprint is only 5% of that of primary aluminum. Aluminum is used because it is lightweight and has a high strength-to-weight ratio. In many products—especially in the transportation industry—it helps save a significant amount of CO₂ emissions during the use phase of the vehicle. So to accurately compare the environmental impact of materials, a full “life-cycle analysis” needs to be done. An example can be found here¹.

Does aluminum production generate large quantities of greenhouse gas emissions?

Primary aluminum production is very energy intensive and generates large amounts of direct and indirect emissions. Direct greenhouse gas emissions come primarily from the use of fossil fuels in the alumina calcination process, but also from process-related conditions in electrolysis, such as consumption of carbon anodes (CO₂) and PFC emissions (PerFluoroCarbon) from anode effects. The main energy consumption is the electricity used for the electrolysis process in aluminum smelters (causing indirect emissions). But the refining of alumina from bauxite ore also requires a significant amount of energy (to produce the solution of bauxite in caustic soda, for the calcination process and for the recovery of caustic soda after use).

Improving energy efficiency is essential for the aluminum industry, both from an economic and environmental point of view. Reducing greenhouse gas emissions from energy use and from the electrolysis processes is therefore important to reducing the overall carbon footprint of primary aluminum. The aluminum industry has been working on this with significant success over the past century.

Countries like Canada, Iceland and Norway use hydroelectric power, a renewable energy source, to produce aluminum. Recycled aluminum only requires 5% of the energy and generates therefore only a very small fraction of the greenhouse gases that primary aluminum does. Using aluminum made from renewable energy and with the highest possible recycled content guarantees the smallest carbon footprint and lowest greenhouse gases possible.¹

Is it true that aluminum production has a worse carbon footprint than steel production?

On a global basis, steel is responsible for 7 to 9% of all energy system emissions. The global steel industry therefore contributes 2.8 Gt per annum of CO₂, and each ton of steel produces on average 1.83 tons of CO₂ (according to the World Steel Association). Primary aluminum production is more energy intensive and its carbon footprint is 4 to 6 times higher than that of steel (on a global average) if calculated per ton of metal. Once each metal is recycled, the carbon footprint in both cases is substantially lower, but in theory it is still higher for aluminum than for steel. It is therefore very important to use each material in the right situation for the right product, so that over the full lifespan (from cradle to grave – or even back to cradle) the carbon footprint is minimized.

For this we need what's called a “life-cycle analysis.” One example is the transportation industry, which uses a lot of both steel and aluminum and accounts for about 19% of all man-made CO₂ emissions. Eighty percent of all greenhouse gas emissions are produced during the operating life (i.e., not the production of a car/bus/truck/etc.), and a 10% weight reduction (by using the right material) can yield fuel economy improvements of 5-7%. For example, reducing the weight of a city bus by 1 kg can save 40-55 kg of CO₂. This is a perfect example of why just looking at the initial carbon footprint of a material will not give us the full picture of the best usage for a specific product. That's why a full life-cycle analysis is needed.

¹ international-aluminium.org/wp-content/uploads/2021/03/Aluminium-Carbon-Footprint-Technical-Support-Document.pdf

² international-aluminium.org/resource/good-practice-for-calculation-of-primary-aluminium-and-precursor-product-carbon-footprints/

³ prod-drupal-files.storage.googleapis.com/documents/resource/public/International%20Carbon%20Flows%20-%20Aluminium%20-%20REPORT.pdf

¹ drivealuminum.wpengine.com/wp-content/uploads/2016/06/OakRidgeLCAFinal_2014.pdf

¹ prod-drupal-files.storage.googleapis.com/documents/resource/public/International%20Carbon%20Flows%20-%20Aluminium%20-%20REPORT.pdf

ft.com/content/3bcbcb60-037f-11e9-99df-6183d3002ee1
energy-transitions.org/wp-content/uploads/2020/08/ETC-sectoral-focus-Steel_final.pdf
pdfs.semanticscholar.org/fd0a/27300d5a034103eb0b962582e19a6ba74a67.pdf
world-aluminium.org/media/filer_public/2013/01/15/f10000169.pdf
oecd.org/env/cc/2483490.pdf

Environment and Human Health

How much carbon emissions are generated by the production of 1 kilogram of aluminum versus steel?

As in many cases, this really depends on where the metal is produced and especially what type of energy was used to produce it. On a global average basis, one kilogram of steel produces 1.83 kg of CO₂, while one kilogram of aluminum produces over 12 kg of CO₂. Unfortunately, most of the recent capacity expansions have taken place in China, where coal is the dominant energy source used. In the past decades, aluminum production capacity has also increased in the Middle East, where the use of primarily natural gas generates fewer carbon emissions.

Outside of those two regions, aluminum production had been shifting to renewable energy sources (predominantly hydroelectric power, used in 100% of all Canadian aluminum production), until the U.S. began reviving old and obsolete coal-powered smelters. However, both the steel and aluminum industries worldwide are working hard to reduce their carbon footprint, and with the Rio Tinto – Alcoa Joint Venture (Elysis)¹ we seem to be relatively close to making this a reality in the not-too-distant future.

Are exorbitant amounts of electrical energy used to produce aluminum?

On a global average, about 14 MWh (Megawatt hours) are required to produce one ton of aluminum. This seems very high, but the number has been coming down with advancing technologies. In the 1980s this number was over 17 MWh, and in 1990 it dropped to around 16MWh.

The new smelters in China are already quite a bit below this number. China on average is at only 13 MWh per ton of aluminum. The most important factor for the reduction came from replacing Söderberg smelting technology with the “prebake” process to bring the number down to 12-16 MWh/ton of aluminum. Most new smelter technologies around the world are now at about 12 MWh/t of aluminum. Rio Tinto and Alcoa are working on “carbon free” aluminum with their new joint venture (Elysis).¹

¹ elysis.com/en/rio-tinto-and-alcoa-announce-worlds-first-carbon-free-aluminium-smelting-process
prod-drupal-files.storage.googleapis.com/documents/resource/public/International%20Carbon%20Flows%20-%20Aluminium%20-%20REPORT.pdf
prod-drupal-files.storage.googleapis.com/documents/resource/public/International%20Carbon%20Flows%20-%20Steel%20-%20REPORT.pdf
world-aluminium.org/media/filer_public/2018/02/15/carbon_footprint_technical_support_document_v1_published.pdf

¹ elysis.com/en/rio-tinto-and-alcoa-announce-worlds-first-carbon-free-aluminium-smelting-process
prod-drupal-files.storage.googleapis.com/documents/resource/public/International%20Carbon%20Flows%20-%20Aluminium%20-%20REPORT.pdf
prod-drupal-files.storage.googleapis.com/documents/resource/public/International%20Carbon%20Flows%20-%20Steel%20-%20REPORT.pdf

Is aluminum recyclable (compared to steel)?

Yes, aluminum is just as recyclable as steel. And due to its much lower melting point, it is also much easier to recycle. In the industry we distinguish between industrial (or pre-consumer) recycling and post-consumer recycling. Industrial recycling is often done in so-called “closed loop systems.”

For example, an automotive stamping factory will return all scrap directly back to its sheet metal supplier that will then re-melt the scrap, and, with very little loss, put it back into new sheet for that same plant.

Post-consumer scrap is either also directly recycled back into the same or similar products. The best example is a pop can, or vehicle wheels. When these items come back as a scrap mix, they are separated and then recycled using special processes. An extreme example is the non-ferrous remains of a scrapped car that was shredded. It goes through different separation processes that allow materials such as plastics and rubber to be separated from the non-ferrous scrap pieces. Those scrap pieces are then re-melted into a die-casting alloy called A380 that is typically used to cast a wide variety of products, from engine blocks to furniture brackets. Aluminum is endlessly recyclable and does not lose much of its value. It is important to recycle it as much as possible back into the same alloy (or alloy family) in order to conserve the maximum value.

thealuminiumstory.com
recycling.world-aluminium.org/home
aluminum.org/industries/production/recycling

How do companies recycle aluminum?

Aluminum is generally combined with other metals to improve its properties. These aluminum alloys are divided into families according to the filler metals. The compositions must comply with recognized standards in order to guarantee the specific properties of each alloy.

Manufacturing companies (e.g., aircraft, automotive and appliance makers) use a number of alloys in their products and recycle scrap, machining chips and defective components.

Re-melting together scrap of different compositions would produce an alloy that doesn’t meet any standard. This is why it becomes necessary to sort them properly so as not to mix them. Normally these companies will sort the scrap metal at the production plant so that it’s not devalued by the recycler. Otherwise, the recycler will have to carry out this sorting on their own. The sorted waste is then crushed and decontaminated to remove any pollutants (e.g., varnish, paint, oil).

The final step is the fusion of this sorted and packaged waste to produce ingots corresponding to the original composition, known as “second fusion” ingots. When the composition of these ingots corresponds to that of a foundry alloy, they are then sold to foundries to make new parts. They can also be re-melted like the alloys produced in the casting centers of aluminum smelters to produce rolling ingots or extrusion billets.

cqrda.ca/wp-content/uploads/2016/04/Annexe-3_Durcissement_ecrouissage.pdf
cqrda.ca/wp-content/uploads/2016/04/Annexe-2_AlliagesFonderie.pdf
actu-environnement.com/media/pdf/news-28012-etude-federec-bilan-recyclage-france.pdf
recyc-quebec.gouv.qc.ca/entreprises-organismes/mieux-gerer/consigne

Structural Integrity

Where does aluminum come from?

Aluminum is obtained through the electrolysis of alumina. But where does alumina come from, and how does the liquid aluminum produced in this way become the lightweight parts used by MAADI Group to build such strong structures?

This website¹ gives an overview of the stages leading from bauxite—the main ore used in aluminum production—to finished products. Other diagrams illustrate these different steps:

- Alumina (Al₂O₃) is chemically extracted from bauxite, which generally contains 40 to 60% of the compound.
- Alumina is then melted at around 960°C and then, through electrolysis, the alumina splits into oxygen and aluminum (Al).

Various avenues allow manufacturers of finished products to take advantage of the extraordinary potential of aluminum, such as:

- Development and casting of specific alloys into ingots, billets, etc.
- Moldings that meet the specific needs of transformers, such as the different nodes designed and used by MAADI Group to manufacture MakeABridge® bridges.
- Ingot rolling and billet extrusion, like the extrusions designed and used by MAADI Group to build its structures.

Quebec producers ensure that each of these steps is carried out with respect for the environment and human health. These producers² ensure that the aluminum produced in Quebec is one of the cleanest—if not the cleanest—in the world. For this reason MAADI Group is proud to use Quebec-made aluminum in all of its products, including gangways, pedestrian bridges, marina decks and more.

¹ aluminiumleader.com/production/aluminum_production/

² aluminium.ca/en

What are the major differences between steel and aluminum?

The density of aluminum is three times lower than that of steel, which gives aluminum a definite advantage for transportation.

Electrical and thermal conductivity depends on the purity of the metal, but generally speaking it is three times higher for aluminum. Combined lightness and conductivity make aluminum indispensable for power transmission lines. The melting temperature of aluminum alloys is about two times lower than that of steel, which means aluminum can be cast in steel molds, a method that considerably reduces manufacturing costs.

Aluminum is also very malleable at a temperature near its melting point, making it very easy to extrude. This “extrudability” makes it possible to create highly complex aluminum profiles that would be impossible to produce using steel.¹ Aluminum offers enormous potential for designers and product design engineers alike.

¹ cqrda.ca/wp-content/uploads/2013/07/Feuillard30_Extrusion.pdf

en.wikipedia.org/wiki/Mass_concentration_(chemistry) (original source: fr.wikipedia.org/wiki/Masse_volumique)

ceal-aluquebec.com/transport-terrestre

en.wikipedia.org/wiki/List_of_thermal_conductivities (Original source: fr.wikipedia.org/wiki/Liste_de_conductivit%C3%A9s_thermiques)

hydroquebec.com/comprendre/transport/lignes-pylones.html

en.wikipedia.org/wiki/Casting_(metalworking) (Original source: fr.wikipedia.org/wiki/Moulage_m%C3%A9tallique#Coul%C3%A9_sous_pression)

What happens if aluminum comes into contact with steel?

It all depends on the contact conditions. To be sure, contact between steel and aluminum can accelerate the corrosion of aluminum, so this issue should be considered. Without the presence of water to act as a conductive liquid, galvanic corrosion cannot occur.^{1, 2} Metal contact between aluminum and steel is also required to form a short-circuit and create a corrosion current, as in the case of a battery.

In the case of rain that can dry, when the wetting time remains short overall, galvanic corrosion may not be a concern. But in any environment exposed to water, short-circuiting is prevented for bolted connections by placing insulation (preferably waterproof) between metal surfaces (steel-bolt-aluminum) or by using a coating on the surfaces to isolate them from each other or from water. In some environments, stainless steel bolts can be used to assemble aluminum. A phenomenon called passivation considerably slows down galvanic corrosion of aluminum, but the time it takes for this type of assembly will need to be taken into account.

Aluminum is more “noble” than zinc, so it’s protected by the zinc coating on galvanized steel. But since zinc is similar to aluminum, it will corrode slowly, making it important to plan ahead for when this protective zinc coating disappears.

¹ aluminium.ca/pdf/guide-des-solutions-pratiques-corrosion-galvanique.pdf

² http://www.worldstainless.org/Files/issf/non-image-files/PDF/Euro_Inox/Contact_with_Other_FR.pdf

What is the lifetime of an aluminum structure vs. a steel structure?

A structure is the framework that supports all loads such as traction, compression and torsion. If the loads are static and the strength limit of the material is respected by the design, in principle the service life is infinite if corrosion is ignored. However, when the mechanical stresses appear as cyclic loads, metals will suffer damage such as material fatigue (i.e., appearance of micro-cracks), leading to failure after a number of cycles depending on the weight of the load.^{1, 2}

When it’s possible to see this type of stress, it’s possible to predict the service life before failure occurs. This is thanks to the large number of mechanical tests performed on each metal. Since the loads on structural elements depend on the design, engineers design the structures and dimensions of the structural elements and their connections (i.e., welded, glued, bolted) to ensure a sufficient and safe service life for the selected metal alloy. Steel has the uniqueness of having a stress threshold that gives an infinite service life. A design based on this threshold is not optimal or required for all types of structures.

The level of safety is partly based on a lack of knowledge of in-service stresses, so designers who want to lighten the components of their structure (e.g., frame members and vehicle chassis) compile data to measure these in-service stresses. For optimal product use, it’s often necessary to decide on the service life requirements during the design phase.

¹ fr.wikipedia.org/wiki/Fatigue_(mat%C3%A9riau)

² peuravion.fr/blog/2013/12/quelle-est-la-duree-de-vie-dun-avion/

Structural Integrity

Is aluminum weldable?

When we talk about aluminum, we are referring to aluminum alloys. There are many welding techniques, and some of them are well suited for welding aluminum.^{1,2} The choice of welding techniques will depend on the shape of the part, the quantity and the alloys to be welded.

Fusion welding of metal at a joint, with or without the addition of metal, does not give satisfactory results with some alloys. The existing knowledge base includes all the practices and advice for welding an alloy or alloys together, as well as the ideal alloy for the filler metal (generally required) using a particular welding technique (e.g., TIG, MIG, etc.). The aluminum alloys used for manufacturing are delivered with enhanced mechanical properties through heat treatment and/or mechanical treatment, which hardens them. The temperature reached in the joint largely eliminates this hardening. It's the role of engineers to take this into account in the design of a part, which often leads to a more or less oversized part.²

Friction stir welding, a fusion-free welding technique almost exclusively used for aluminum, makes it possible to weld all alloys without almost any loss of mechanical properties, including for problematic foundry alloys.³ When geometry and quantities are adapted to the process, this technology can become an essential asset for aluminum and product quality.

Is there any training to learn how to calculate aluminum?

Civil engineering courses teach future engineers to calculate the forces to which the elements of a loaded structure are subjected. The materials used in structures such as steel, concrete, wood and aluminum each have their own mechanical characteristics that must be taken into account in the detailed calculations.¹ Since they've been used for so long, the characteristics of old traditional materials such as steel, concrete and wood are integrated into structural design software, but not aluminum. For reasons related to manufacturing difficulty, traditional materials are made available in standard profiles, which make it easier for engineers to learn how to use them, ensure compliance with standards and ultimately choose those materials. But aluminum's extrudability allows for complex shapes and contours, providing a clear advantage for structural design.

Additional training is offered to engineers working in the aluminum industry to address the lack of training with aluminum alloys. Some are ad hoc,² while others are offered as part of specialized training.^{3,4} Since these short programs are offered on a one-off basis, it's best to check the schedule directly with the institutions offering the training.

¹ en.wikipedia.org/wiki/Welding (original source: fr.wikipedia.org/wiki/Soudage)

² cqrda.ca/wp-content/uploads/2015/04/feuillard11-soudage.pdf

³ ceal-aluquebec.com/friction-malaxage-fsw/

¹ cqrda.ca/shop/presses-de-l-aluminium/calcul-charpentes-aluminium/

² genium360.ca/fr-ca/formation/Formation%20en%20salle/Construction%20structurale%20en%20aluminium%20incluant%20l%E2%80%99application%20de%20la%20norme%20CSA%20S157%20(en%20collaboration%20avec%20l%E2%80%99Association%20de%20l%E2%80%99aluminium%20du%20Canada)/S58652

³ ulaval.ca/sites/default/files/les-etudes/chaire-fiche/Fiche-CLE-charpentes-metalliques-fr-Vfinale.pdf

⁴ safi.com/online-training/

Why aren't all engineers familiar with calculations for aluminum structures?

Reference books on the subject for aluminum are relatively recent. The first one¹ that was published in Canada was released back in 2003, while the revision of the CAN/CSA S157-05² standard is more recent. The training of engineers in universities cannot be done without these tools. These resources are, however, critical to engineers' training. That's why the aluminum industry has to proactively approach institutions to educate them about the importance of including the sustainable metal in their curriculum. Initiatives to encourage on-the-job training, like scholarships and recycling courses, are relatively recent.

For a long time, universities have offered undergraduate programs that essentially focus on traditional materials like steel, concrete and wood. The tide is slowly starting to turn, but aluminum does not yet enjoy its rightful place in university programs. That said, the rising cost of steel means that more and more engineers and architects are turning to aluminum. And that's great news, because as demand increases, so will the need for training.

¹ cqrda.ca/shop/presses-de-l-aluminium/calcul-charpentes-aluminium/

² scc.ca/fr/standards/work-programs/csa/calcul-de-la-resistance-mecanique-des-elements-en-aluminium

Cost

How much does aluminum cost, and how does it compare to steel?

Both aluminum and steel are commodities. Their prices are determined by many factors, but mainly by supply and demand. Although there are some similarities, their markets are very different, which has a big impact on their prices. As a rule of thumb, aluminum costs about three times more than steel. So if a pound of steel is around 0.30 USD/lb, aluminum will be around 0.90 USD/lb. At the same time, aluminum represents only one third of the weight of steel.

There are also big differences in pricing depending on the specific type and alloy. Generally, the price differences between different steel types are much greater than those of different aluminum alloys. This is due to the alloy ingredients—for aluminum, lower priced metals like silicon and magnesium are used, but for steel, more expensive elements with volatile prices are used, like nickel and cobalt.

Why is aluminum more expensive than steel?

Primary aluminum production is extremely energy intensive, which is the main factor responsible for the high cost. Between one third and one half of the cost of making aluminum is the direct and indirect energy needed to produce it.

After that, most of the cost is attributable to the alloy ingredients, which are usually cheaper for most aluminum alloys than for many types of steel. The main ingredients of aluminum alloys are silicon (Si) and magnesium (Mg), while main alloy ingredients for steels are often very highly priced elements like nickel (Ni) and cobalt (Co). For this reason we need to clearly distinguish which type of steel we're comparing with aluminum. The most common mild steels and carbon steels are usually less expensive than aluminum (on a per kg or per ton basis). It's very important to take all factors into account, including the transformation process, tooling and assembly costs, as well as lifetime costs (e.g., maintenance). For example, if we compare stainless steel and aluminum and consider aluminum's corrosion resistance, then steel tends to be more expensive.

What determines the price of aluminum?

The global price of primary aluminum is determined at the London Metal Exchange (LME). Many factors influence the price, like:

- Global supply and demand for the metal
- Economics of aluminum production, especially the price of energy
- Inventories: The higher the inventories, the greater the downward pressure on the price, and vice versa
- Regulatory changes: An embargo, like the U.S. placed on Russian metal, changes the market dynamics and impacts the price
- Exchange rates: Aluminum is traded even at the LME in U.S. dollars, but most of the production and demand are outside of the U.S.
- Investors buying metal when the current price is low, expecting the price to go up in the future

There is also a regional market premium on the LME price. In North America it is called the “Midwest U.S. Transaction Premium” (MWP). It depends on basically the same factors, but on a regional level. Regional deficits like we have in North America require a high premium to attract offshore metal. A duty in one country or region is a regulatory change that directly impacts this regional premium, as is the case for the MWP. Together the global LME price and the regional premium form the “all in” price of primary aluminum.

Is primary aluminum cheaper in Quebec because there is so much produced in the province?

Primary aluminum has one global base price, which is determined at the London Metal Exchange (LME). No primary aluminum producer would sell below this price, as they could simply sell their metal at that price directly on the exchange. The metal bought at the LME can be at any producer's location (in other words, the location is at the seller's discretion). This means that a consumer would need to bring it to wherever it is needed.

To avoid this, however, there is a second factor concerning the primary aluminum price, which is a regional market premium that exists in every major consumer region. In Japan it is called “CIF Japan,” whereas in Europe it is “GW premium paid in-warehouse Rotterdam.” In North America it is the “Midwest U.S. Transaction Premium” (MWP). This LME price plus the MWP together form the “Midwest U.S. Transaction Price,” which is the price for primary aluminum delivered and duty paid in the Midwest region. Consumers outside the Midwest can get a small discount or premium if they're close to a producer, but the discount is usually very small. All Quebec-based aluminum producers can sell in the U.S. basically duty free and will not sell their metal much cheaper in Quebec.

Pedestrian Bridges



Custom Bridges



Enriches the landscape

Durable investment

Cost effective



MAADI Group aluminum pedestrian bridges are designed by top-grade professional engineers specialized in pony truss bridge design and top chord stability criteria, utilizing elastic lateral restraints.

Specifications

Design and materials

- 100% recyclable aluminum structural components and energy-efficient recycling.
- Resistant to corrosion from salt water, chemicals and pollution. A permanent film of natural oxide makes the metal less impacted or corroded by the environment.
- Suited to extreme cold, aluminum does not crack at low temperatures.
- Integrates well with new construction and retrofits of existing structures.

Maintenance

Virtually maintenance-free and highly cost-effective, compared with steel when total cost of ownership (TCO)¹ is considered.

Vandalism

Very easy to remove graffiti by brushing or sanding bare aluminum, compared to steel that has protective coating.

Warranty

We offer a 15-Year Limited Warranty on aluminum against material failure, defects and corrosion.



¹ maadigroup.com/en/news/total-cost-of-ownership-aluminum-steel



Pedestrian Bridges

Pedestrian Bridge Styles

MAADI Group natural finish aluminum bridges include various styles and bridge spans for different needs and purposes.

St. Lawrence



Type
Arched pony truss bridge

Spans
Up to 150' (45.7 m)

Widths
From 3' to 12' (1 m to 3.7 m)

Banff



Type
Bowstring truss bridge

Spans
Up to 100' (30.5 m)

Widths
From 6' to 12' (1.8 m to 3.7 m)

Yukon



Type
Bow truss bridge

Spans
Up to 160' (48.8 m)

Widths
From 6' to 10' (1.8 m to 3 m)

Glacier



Type
Pony truss bridge

Spans
Up to 150' (45.7 m)

Widths
From 3' to 10' (1 m to 3 m)

Tremblant



Type
H-section truss bridge

Spans
Up to 160' (48.8 m)

Widths
From 4' to 12' (1.2 m to 3.7 m)

Mackenzie



Type
Box truss bridge

Spans
Up to 160' (48.8 m)

Widths
From 6' to 10' (1.8 m to 3 m)

Jasper



Type
Cantilever walkway for bridge widening


Spans
Up to 100' (30.5 m)

Widths
From 5' to 10' (1.5 m to 3 m)

Tailored Designs

A design that can be adapted to your needs.

Our bridge design offers fully customized options to create a distinctive structure that is best suited for its purpose and integrates with its surroundings.

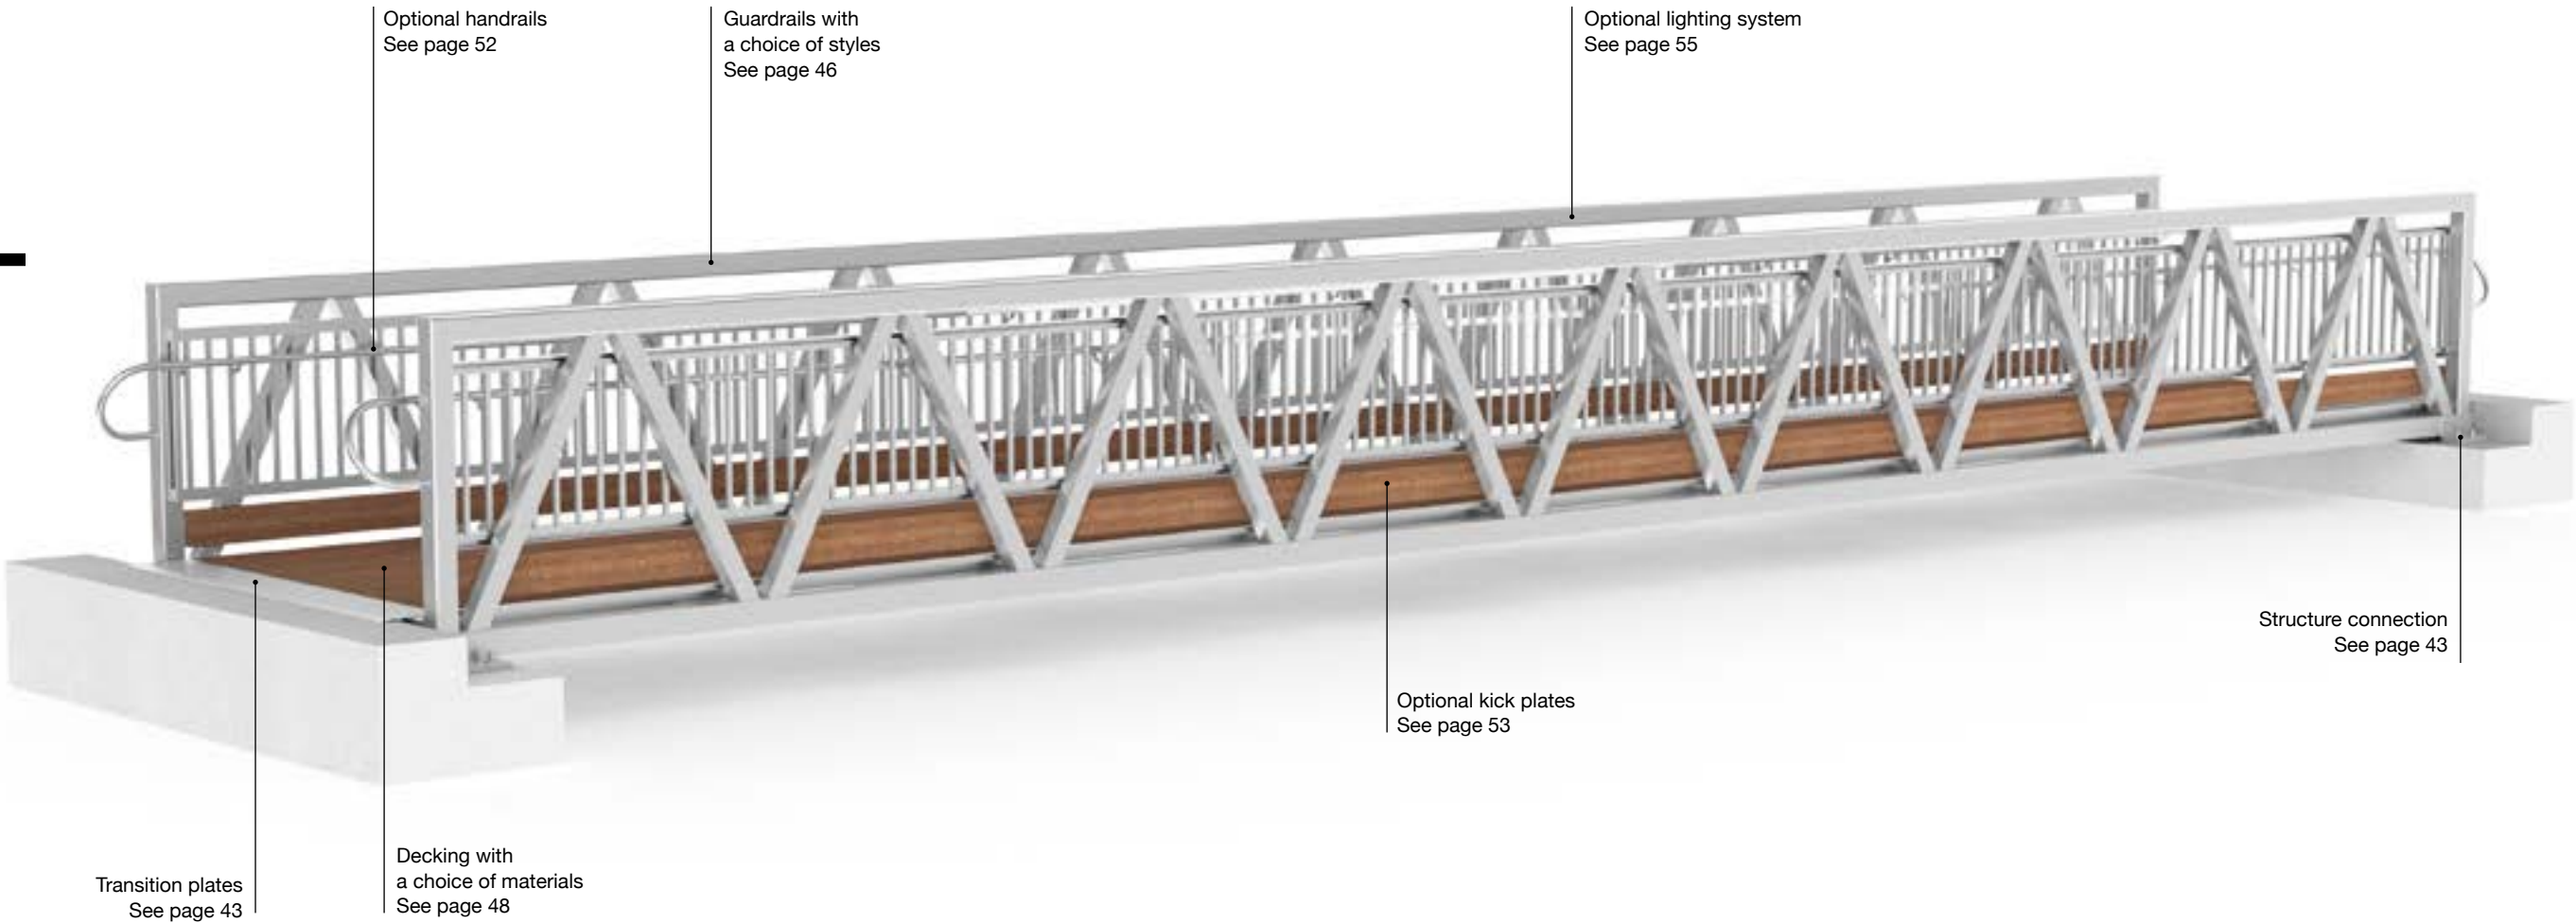



Structure Connection

The structure connection system allows expansion and contraction of the bridge.



Anchor and bearing plates


- Specifications**
- Allow thermal expansion on one end of the bridge
 - Stainless steel anchors kit with adhesive cement included
 - Isolators included



Transition plate

- With non-slip finishing, transition plates facilitate access to the gangway from adjacent surfaces.
- Specifications**
- Aluminum plate with anti-slip diamond treads
 - Comes with frictionless edge to protect decking surface
- Options**
- Aluminum plate with anti-slip extruded strips is available upon request

Customization

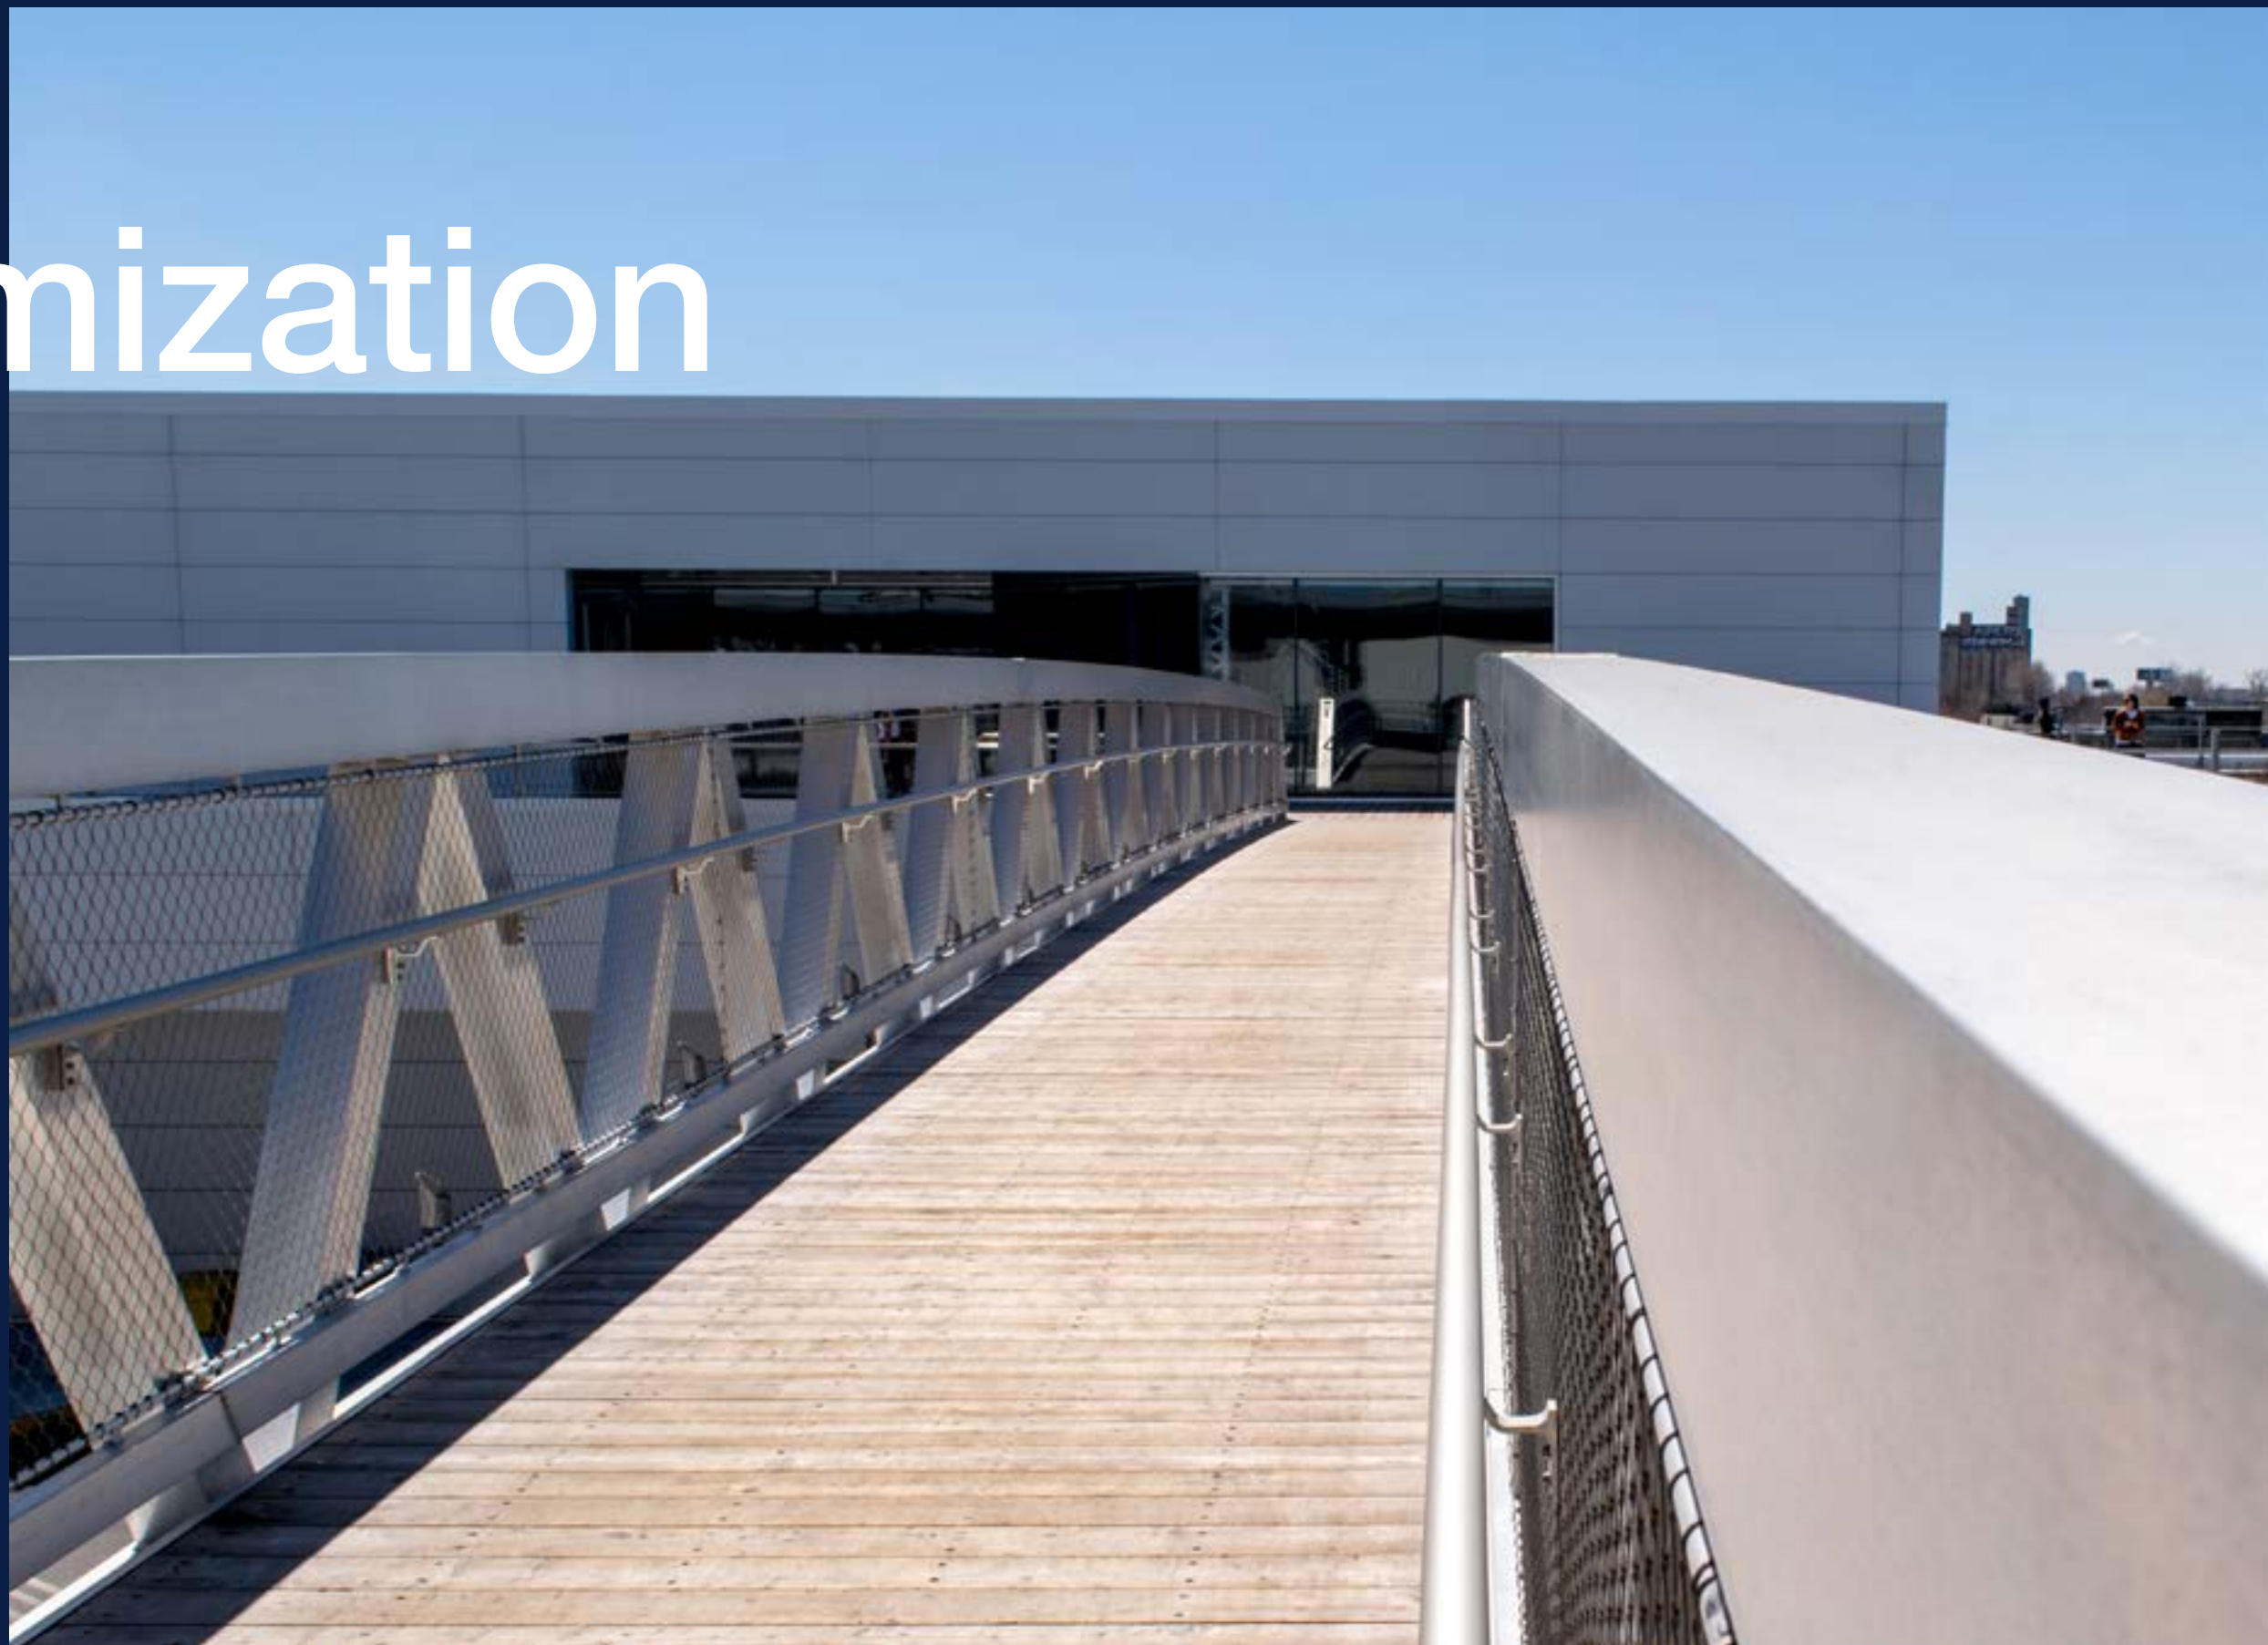

Guardrails

MAADI Group guardrail systems offer safe and practical solutions that are also attractive.

Our guardrails comply with Canadian and American bridge codes and standards.



Vertical pickets

Material and finish

- Extruded aluminum with natural finish

Specifications

- Less than 4" (102 mm) between pickets – National Building Code of Canada
- Less than 6" (152 mm) between pickets – CSA S6-19 Canadian Highway Bridge Design Code)

Heights

- Pedestrians: 42" (1,067 mm)
- Cyclists: 54" (1,372 mm)



Horizontal railings

Material and finish

- Extruded aluminum with natural finish

Specifications

- Less than 6" (152 mm) between railing – CSA S6-19 Canadian Highway Bridge Design Code)

Heights

- Pedestrians: 42" (1,067 mm)
- Cyclists: 54" (1,372 mm)

Option

- Midrails also available




Custom design

Option

- Personalize your guardrails with your own design

Decking Materials

Choose bridge decking material based on how your structure will be used. MAADI Group engineers can recommend the best decking for your needs in terms of application, safety, and maintenance. Here are our most popular and durable options.

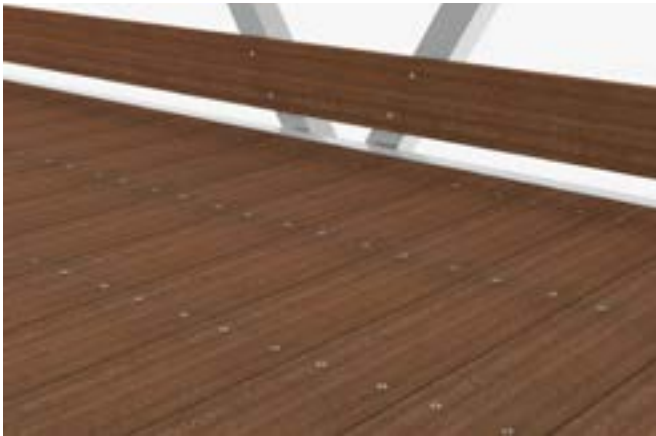


Ipe hardwood

- Specifications**
- Naturally very resistant to decay, rot and insect attack
 - Minimum 40-year lifespan depending on use
 - Low maintenance, no treating or sealing required for durability (treating may be required to keep rich, red color)
 - Straight grain with fine to medium texture
 - Economical over life of the structure
 - Average density of 69 lb/ft³ (1,100 kg/m³)

- Dimensions**
- S4S outside corner
 - Width varies between 5" and 7 3/8" (127 mm and 188 mm)
 - Thickness varies between 1" and 1 1/2" (25 mm et 40 mm) depending on loads and applications

- Options**
- Available in pressure-treated pine wood planks, in incised hemlock wood planks and in composite planks
 - Other wood decking options are available upon request

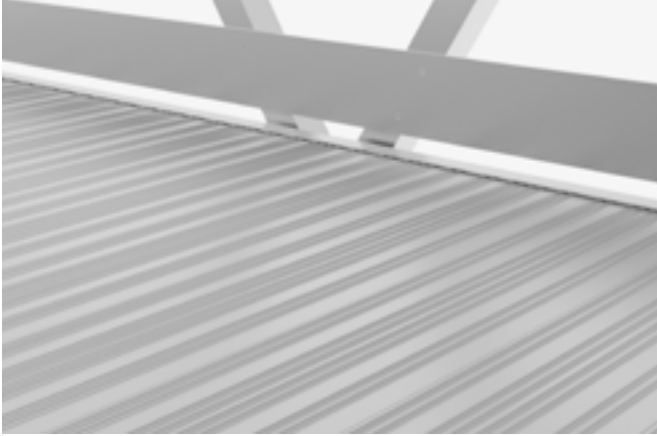


Ribbed aluminum

- Specifications**
- Unlimited lifespan with regular cleaning
 - High grip ribbed surface
 - Maintenance-free and corrosion-resistant – no treatments or sealers required
 - 100% recyclable and reusable
 - Economical over life of the bridge/structure

- Material**
- Natural finish extruded aluminum alloy – no paints or coatings required

- Options**
- Durable polyester powder coating for extra adherence also available upon request
 - Compliant to AAMA 2604-10 & ASTM D3359
 - Available in two colors: beige and gray (other RAL colors are available upon request)

- Heavy load option**
- Maintenance-free GuarDECK™ tongue and groove anti-slip panels. For more details, see page 136.

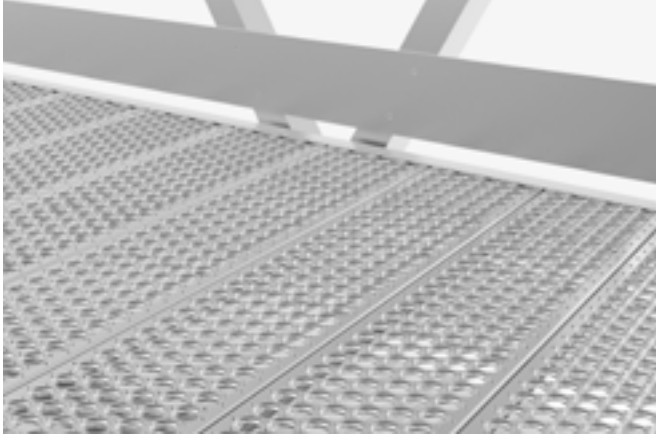

Shur grip

- Specifications**
- Unlimited lifespan with regular cleaning
 - High grip surface
 - Maintenance-free and corrosion-resistant – no treatments or sealers required
 - Transversal planks have integral side channels
 - Safety grating planks have debossed holes, each surrounded by 6 perforated buttons
 - 100% recyclable and reusable
 - Economical over life of the structure

- Material**
- Extruded aluminum alloy with natural finish – no paint or treatment required

- Options**
- Grip span planks are also available
 - Other decking options are available upon request



Anti-skid surface coating





- Specifications**
- Minimum 20-year lifespan depending on use
 - Maintenance-free and impervious – no treatments or sealers required

- Materials**
- Polyurethane based system combined with an aggregate dressing provides an extremely durable slip and skid resistant surface

- Option**
- Available in two aggregate dressing finishes: for pedestrians and cyclists or for lightweight vehicles
 - Skid resistance values for GuarDECK™ as measured in accordance with ASTM E 303-22 (Standard Test Method for Measuring Surface Frictional Properties Using the British Pendulum Tester):
 - Perpendicular grooves (aligned w/ traffic flow): Dry: Average of 77.4 BPN; Wet: Average of 37.2 BPN
 - Parallel grooves: Dry: Average of 70 BPN; Wet: Average of 25.4 BPN

Decking Materials

Consider maintenance, durability, adherence, and sustainability when choosing the most suitable decking material for your project.

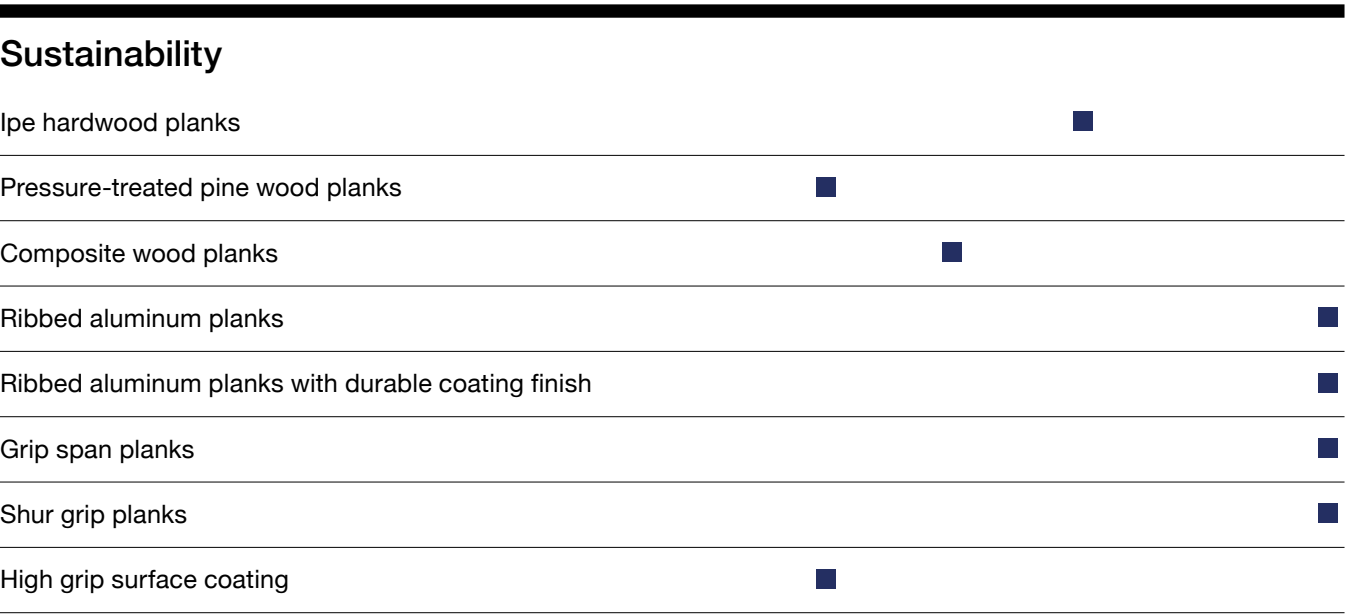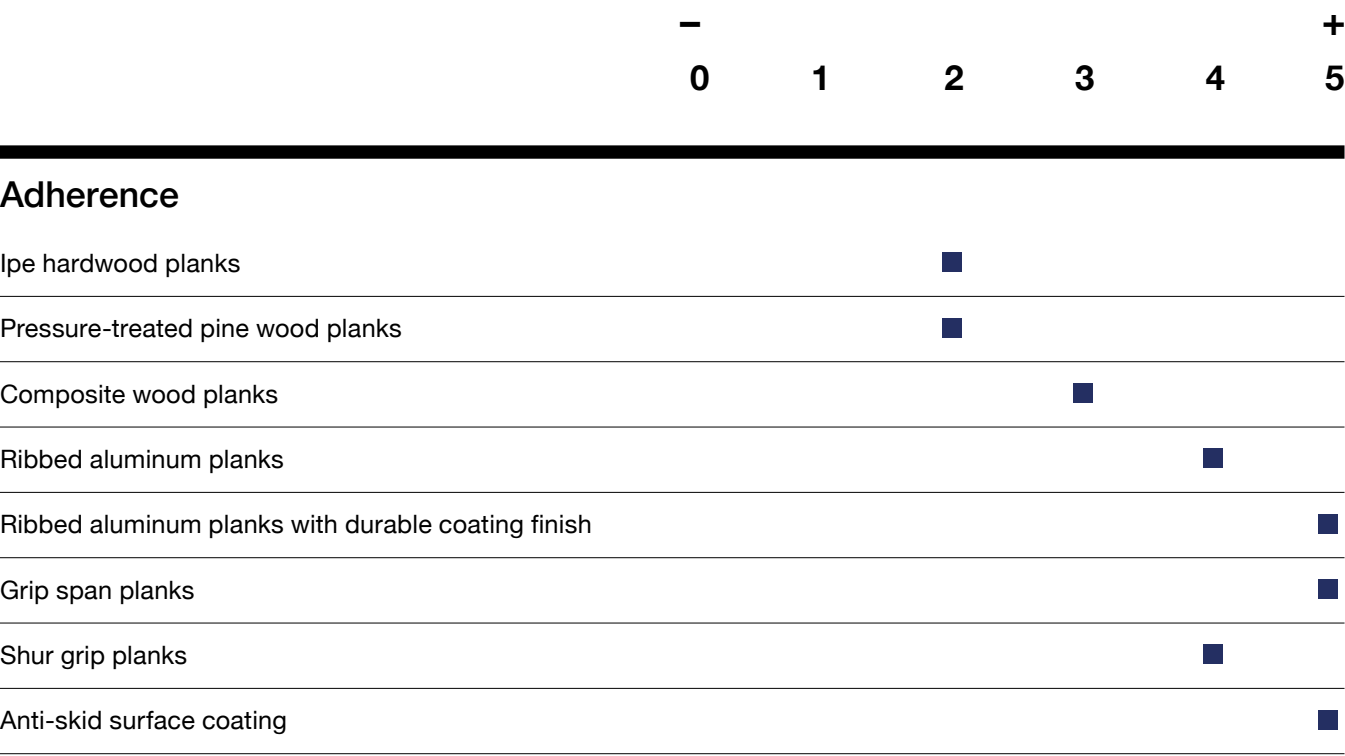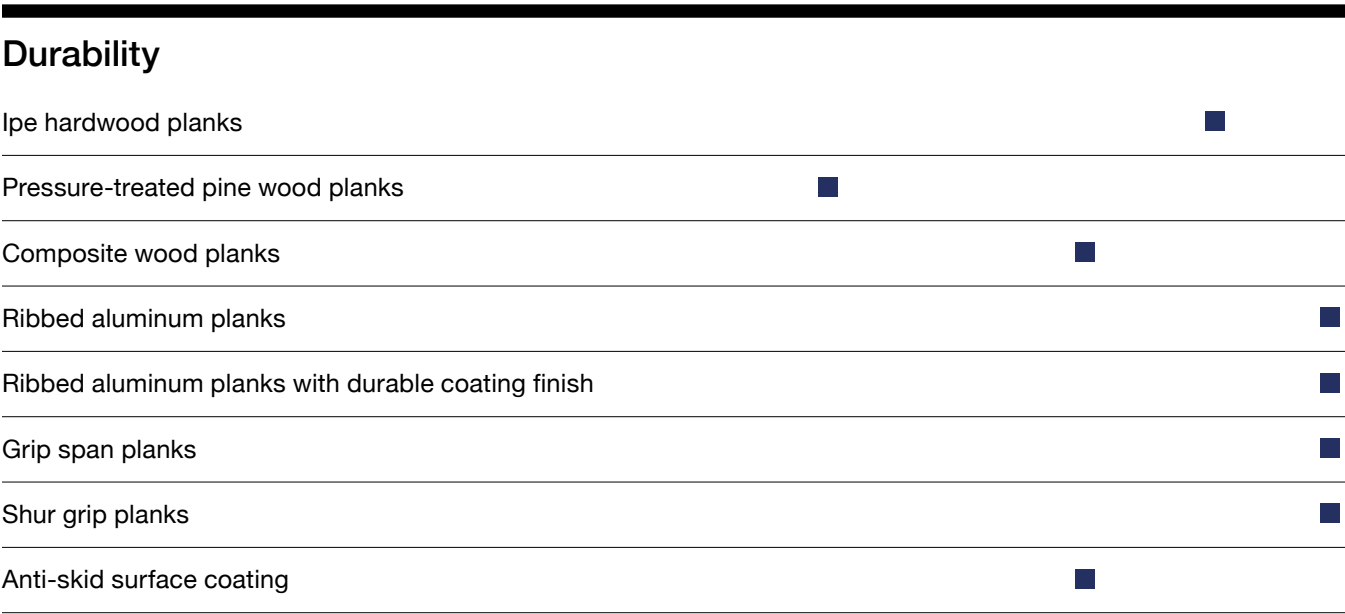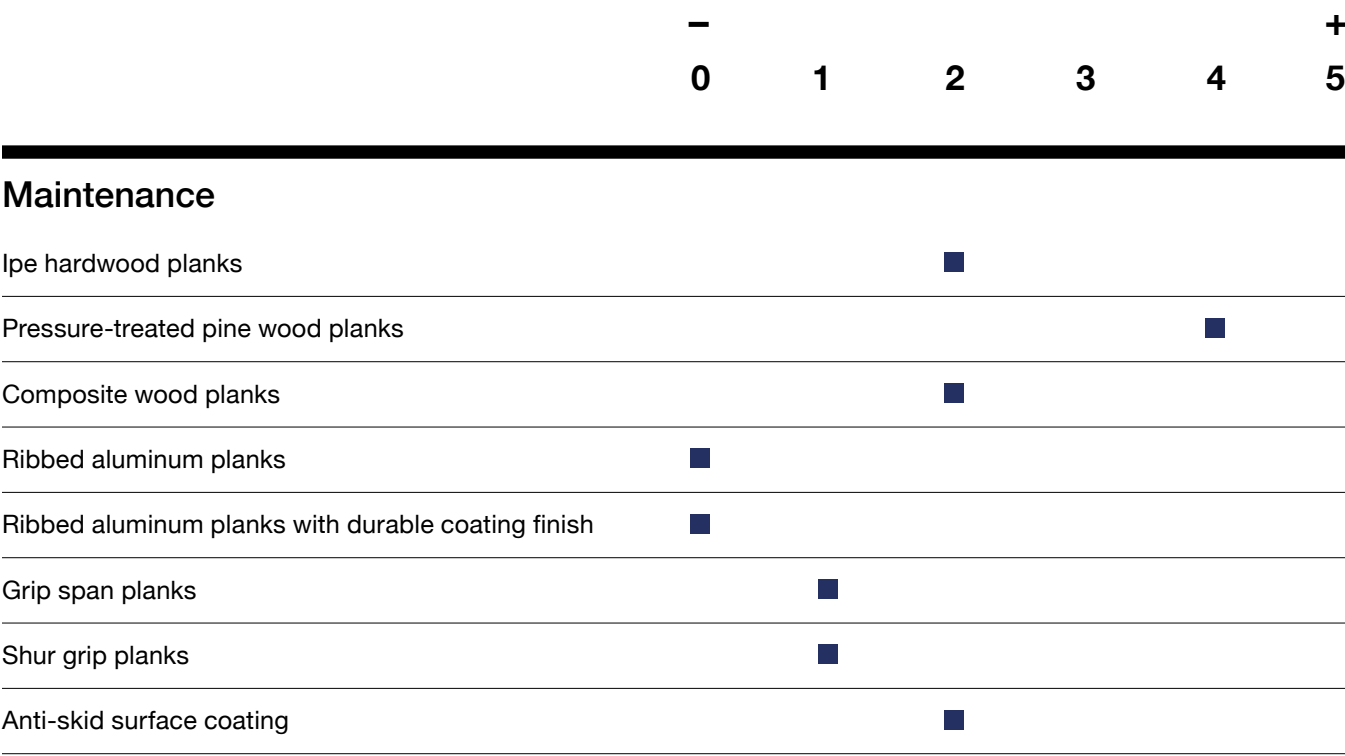

Options

Kick plates, handrails and LED lighting system are offered to further customize your bridge to best suit the application and the surrounding environment.



Handrails

Material

- Extruded aluminum alloy with natural finish

Dimensions

- Diameter: from 1 1/4" to 2" (from 32 mm to 50 mm)
- 2" (50 mm) hand clearance

Height

- Standard: 36" (915 mm)
- ADA¹: 24" (610 mm)

Option

- Double handrails (ADA) are available upon request

¹ Americans with Disabilities Act



Integrated kick plates

Specifications


- Helps prevent objects from falling and provide a higher level of security

Material

- Extruded aluminum alloy with natural finish

Dimensions

- Height: 4" (102 mm)

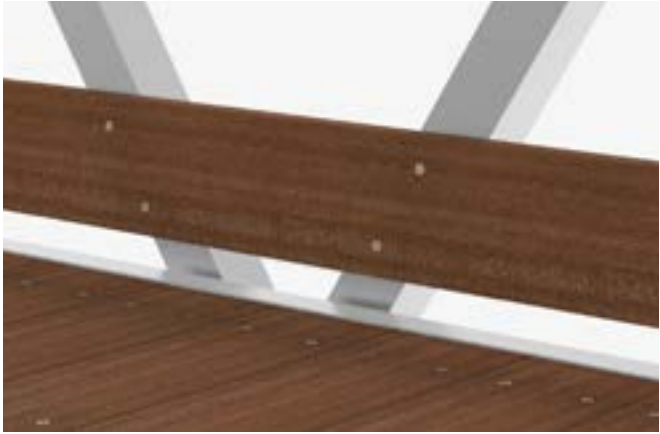

Raised kick plates

Specifications

- Helps prevent objects from falling and provide a higher level of security
- Compliant with the Americans with Disabilities Act

Materials

- Ipe hardwood, wood composite or extruded aluminum alloy
- Other type of woods are availbale upon request

Dimensions

- Wood or wood composite
Heights: 3 1/2" (89 mm), 5 1/2" (140 mm) or 7 1/4" (184 mm)
- Aluminum
Heights: 4" (102 mm), 6" (152 mm) or 8" (203 mm)



Options



LED lighting system

- Specifications**
- White LED



LED light projector system

- Options**
- Programmable RGB LED
 - White LED



Integrated lighting system

- Specifications**
- Integrated into the handrails

- Options**
- Programmable RGB LED
 - White LED

Projects



Parks and Recreation

Designs that Enrich the Landscape

MAADI Group pedestrian walkways, bicycle paths and bridges provide access to remote or otherwise inaccessible places. Requiring very little maintenance and resistant to the most extreme weather conditions, our structures provide a safe access to parks and other natural settings, in addition to respecting the environment in which they are installed.



Rideau River Bridges

Smiths Falls, Ontario



Overall spans
68' 6" and 84' 11"
(20.9 m and 25.9 m)

Clear width
5' 6" (1.7 m)



Pedestrian load
84 psf (4 kPa)

Vehicular load
N/A

Bridge self-weights
7,700 lb and 9,240 lb
(3,500 kg and 4,200 kg)

Wind pressure
8.6 psf (410 Pa)

Bridge style
St. Lawrence


Options
Ipe hardwood decking,
aluminum guardrails with
vertical pickets railings



Quinchien Bridge

Vaudreuil-Dorion, Quebec



Overall span 98' 6" (30 m)	Pedestrian load 84 psf (4 kPa)	Bridge self-weight 30,360 lb (13,800 kg)	Bridge style St. Lawrence
Clear width 10' (3 m)	Vehicular load 18,000 lb (8,150 kg)	Wind pressure 37 psf (1,750 Pa)	Options Ipe hardwood decking and kick plates, aluminum guardrails with vertical pickets railings, LED lighting
			




↓ LED lighting



White Street Bridge

Vaudreuil-Dorion, Quebec



Overall span 152' (46.3 m)	Pedestrian load 72 psf (3.47 kPa)	Bridge self-weight 34,760 lb (15,800 kg)	Bridge style Mackenzie
Clear width 6' 1" (1.83 m)	Vehicular load 2,500 lb (1,134 kg)	Wind pressure 7.2 psf (345 Pa)	Options Grip span decking, aluminum guardrails with vertical picket railings, western red cedar kick plates, LED light projector system
			

Dame de Cœur Theatre Retrofit Bridge

Upton, Quebec



Overall span
152' (46.3 m)

Clear width
6' 1" (1.83 m)



Pedestrian load
72 psf (3.47 kPa)

Vehicular load
2,500 lb (1,134 kg)

Bridge self-weight
34,760 lb (15,800 kg)

Wind pressure
7.2 psf (345 Pa)

Bridge style
Mackenzie


Options
Grip span decking, aluminum guardrails with horizontal railings, western red cedar kick plates, LED light projector system



Stevens Bridge

Waterloo, Quebec




Overall span 98' 6" (30 m)	Pedestrian load 84 psf (4 kPa)	Bridge self-weight 36,300 lb (16,500 kg)	Bridge style St. Lawrence
Clear width 9' 10" (3 m)	Vehicular load 17,950 lb (8,150 kg)	Wind pressure 7.3 psf (350 Pa)	Options Eastern hemlock wood decking and kick plates, aluminum guardrails with horizontal railings, LED light projector system
			



Lac-Jérôme Dam

Saint-Jérôme, Quebec



Overall span 18' 10" (5.7 m)	Pedestrian load 84 psf (4 kPa)	Bridge self-weight 7,722 lb (3,510 kg)	Bridge style Glacier
Clear width 13' 5" (4.1 m)	Vehicular load 18,700 lb (8,500 kg)	Wind pressure 8.4 psf (400 Pa)	Options Fire retardant treated Douglas fir decking and kick plates, aluminum guardrails, horizontal railings and handrails
			

Architecture

Bridges with Beauty

Our eye-catching welded pedestrian bridges with natural finish are built and customized to your specifications. With a choice of 7 pedestrian bridge styles and a wide variety of options, you can create a distinctive structure that enriches the landscape and last decades, with no maintenance required.



Alexandra Pier

Montreal, Quebec



Overall span 106' 11" (32.6 m)	Pedestrian load 100 psf (4.8 kPa)	Bridge self-weight 19,800 lb (9,000 kg)	Bridge style St. Lawrence
Clear width 6' 7" (2 m)	Vehicular load 2,200 lb (1,000 kg)	Wind pressure 8.4 psf (400 Pa)	Options Western red cedar decking, aluminum guardrails with stainless steel "Lock-Tuck" mesh, aluminum handrails, LED light projector system
 			



Bayview Skywalk Bridge

San Diego, California

Overall span 83' 4" (25.4 m)	Pedestrian load 93 psf (4.5 kPa)	Bridge self-weight 8,910 lb (4,050 kg)	Bridge style Glacier
Clear width 6' (1.8 m)	Vehicular load N/A	Wind pressure 35 psf (1.7 kPa)	Options Aluminum decking and glass panel guardrails



St-Martin School

Laval, Quebec



Design/build of a bowstring truss style bridge




Overall span 30' 10" (9.4 m)	Pedestrian load 100 psf (4.8 kPa)	Bridge self-weight 8,580 lb (3,900 kg)	Bridge style Banff
Clear width 8' 10" (2.7 m)	Vehicular load N/A	Wind pressure 12.5 psf (600 Pa)	Options Polymer decking, aluminum guardrails with vertical pickets railings
			

TD Place Stadium

Ottawa, Ontario

Overall span 98' 5" (30 m)	Pedestrian load 100 psf (4.8 kPa)	Bridge self-weight 17,435 lb (7,925 kg)	Bridge style St. Lawrence
Clear width 6' (1.8 m)	Vehicular load 2,000 lb (910 kg)	Wind pressure 8.6 psf (410 Pa)	Options Ipe hardwood decking, aluminum guardrails, vertical pickets railings and handrails
			

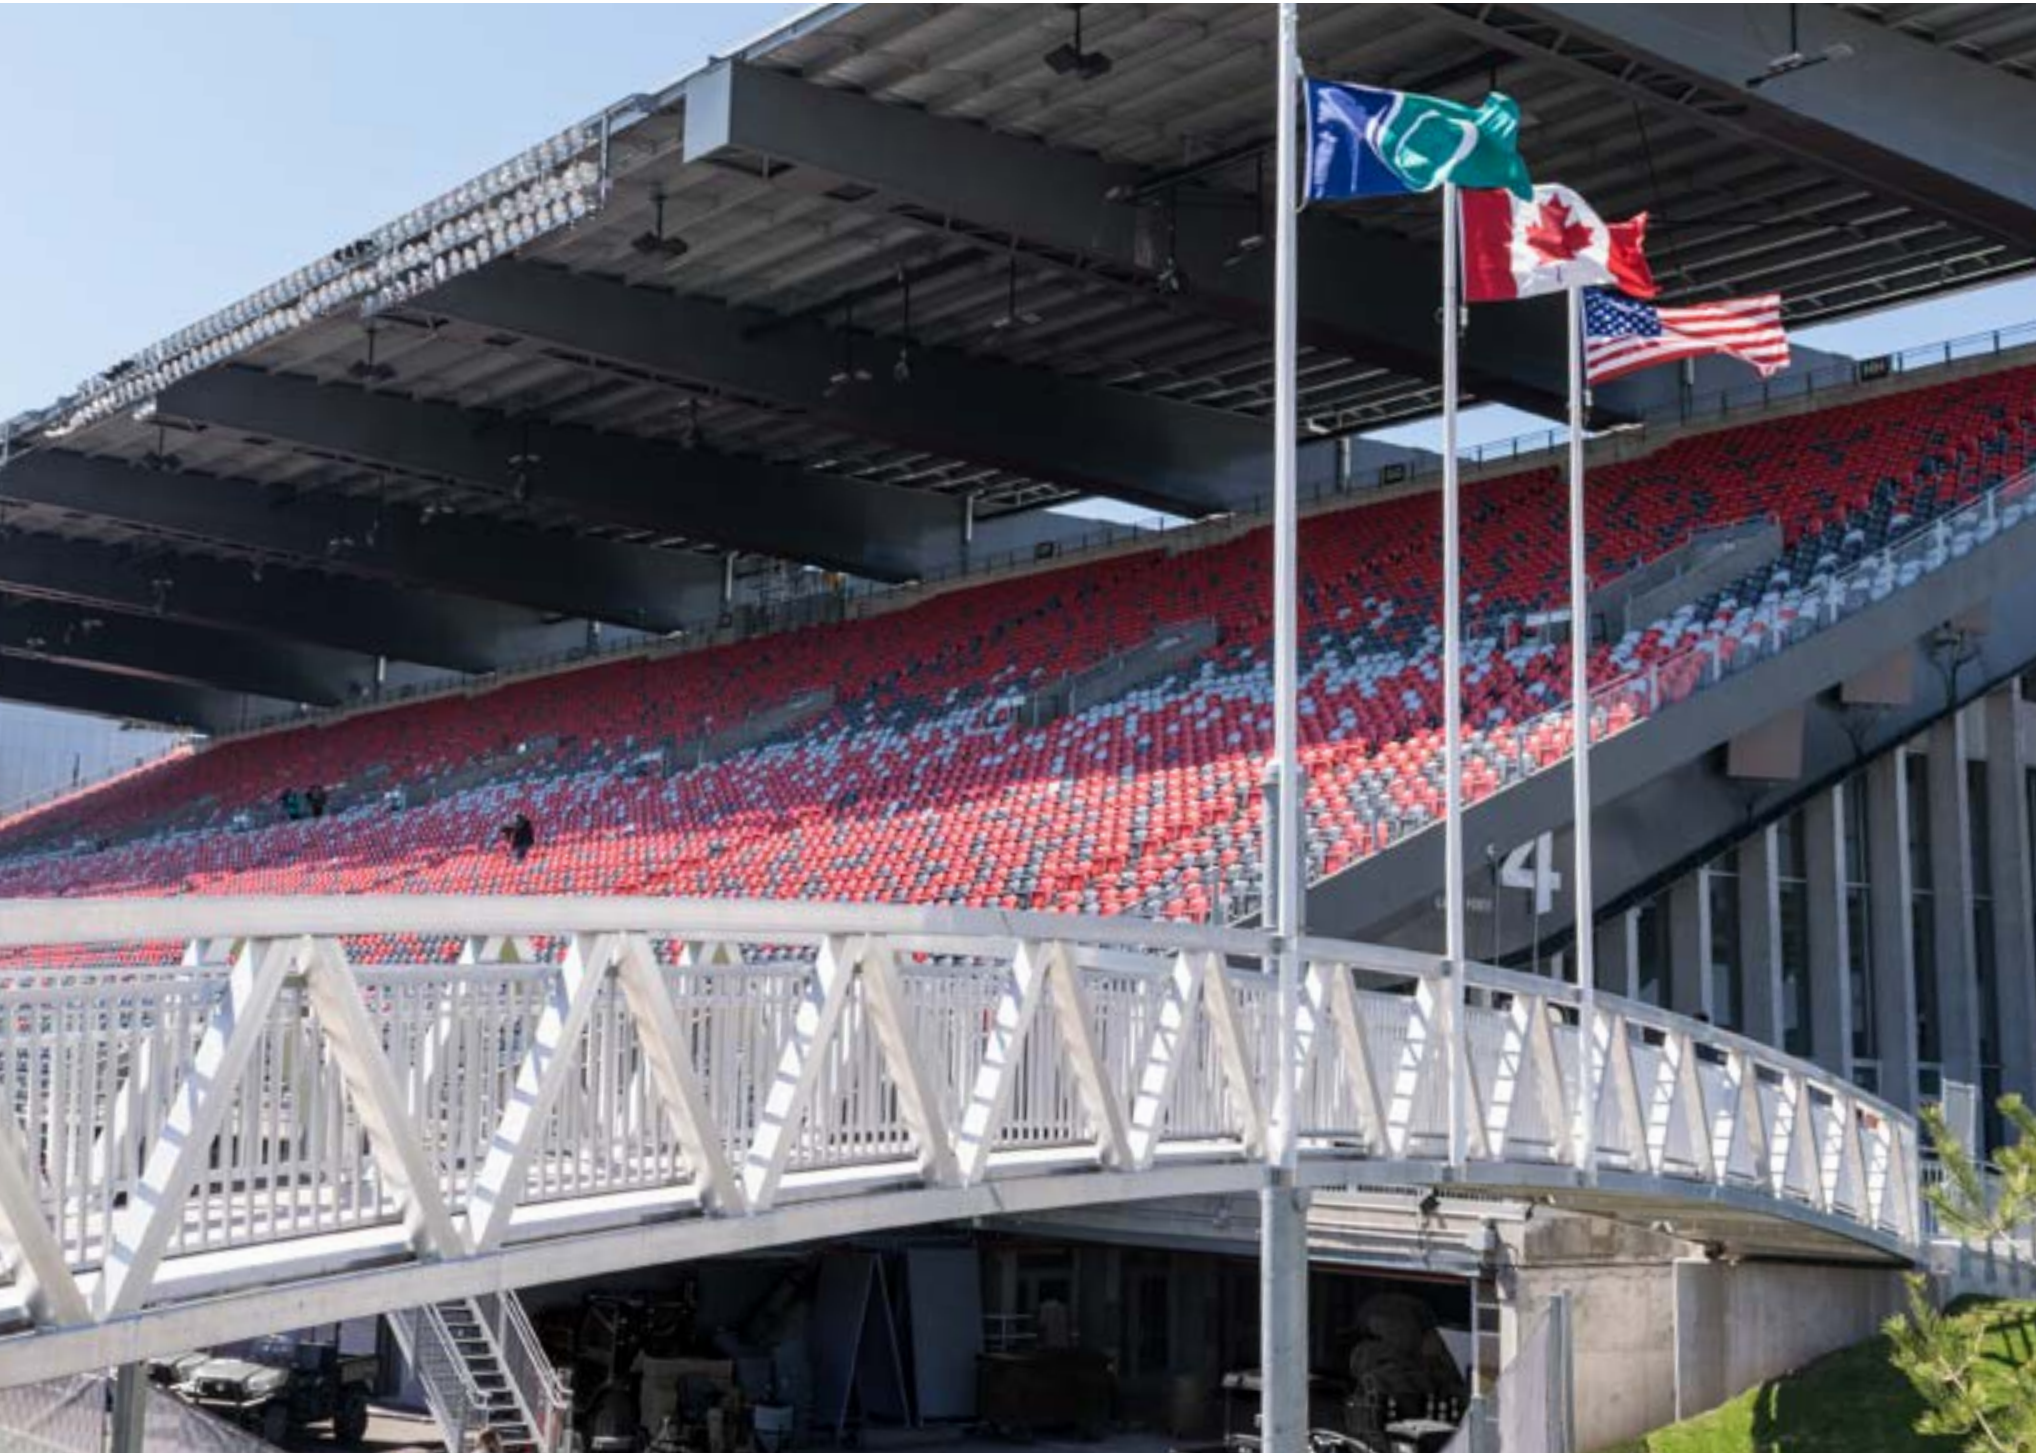

Industries

Masters of Efficiency

We design and build high-strength aluminum gangways, bridges, offshore platforms and more for temporary or permanent projects.

Our lightweight, corrosion-free structures are made to endure extreme weather conditions and heavy, repeated use. Bracing components and anti-skid decking units add to structural strength and safety.



Offshore Platform Bridge

Deep ocean

Overall span 152' (46.3 m)	Pedestrian load 31 psf (1.5 kPa)	Bridge self-weight 30,140 lb (13,700 kg)	Bridge style Mackenzie
Clear width 4' (1.2 m)	Vehicular load N/A	Wind pressure 7.8 psf (375 Pa)	Options Aluminum grip span decking, aluminum guardrails and kick plates



Medical Center


New York, New York

Overall span 36' 8" (11.2 m)	Pedestrian load 100 psf (4.8 kPa)	Bridge self-weight 6,000 lb (2,730 kg)	Bridge style Glacier
Clear width 8' 2" (2.5 m)	Vehicular load N/A	Wind pressure N/A	Options Ribbed aluminum decking, guardrails, square mesh and handrails in aluminum



Rio Tinto Alcan

Saguenay, Quebec

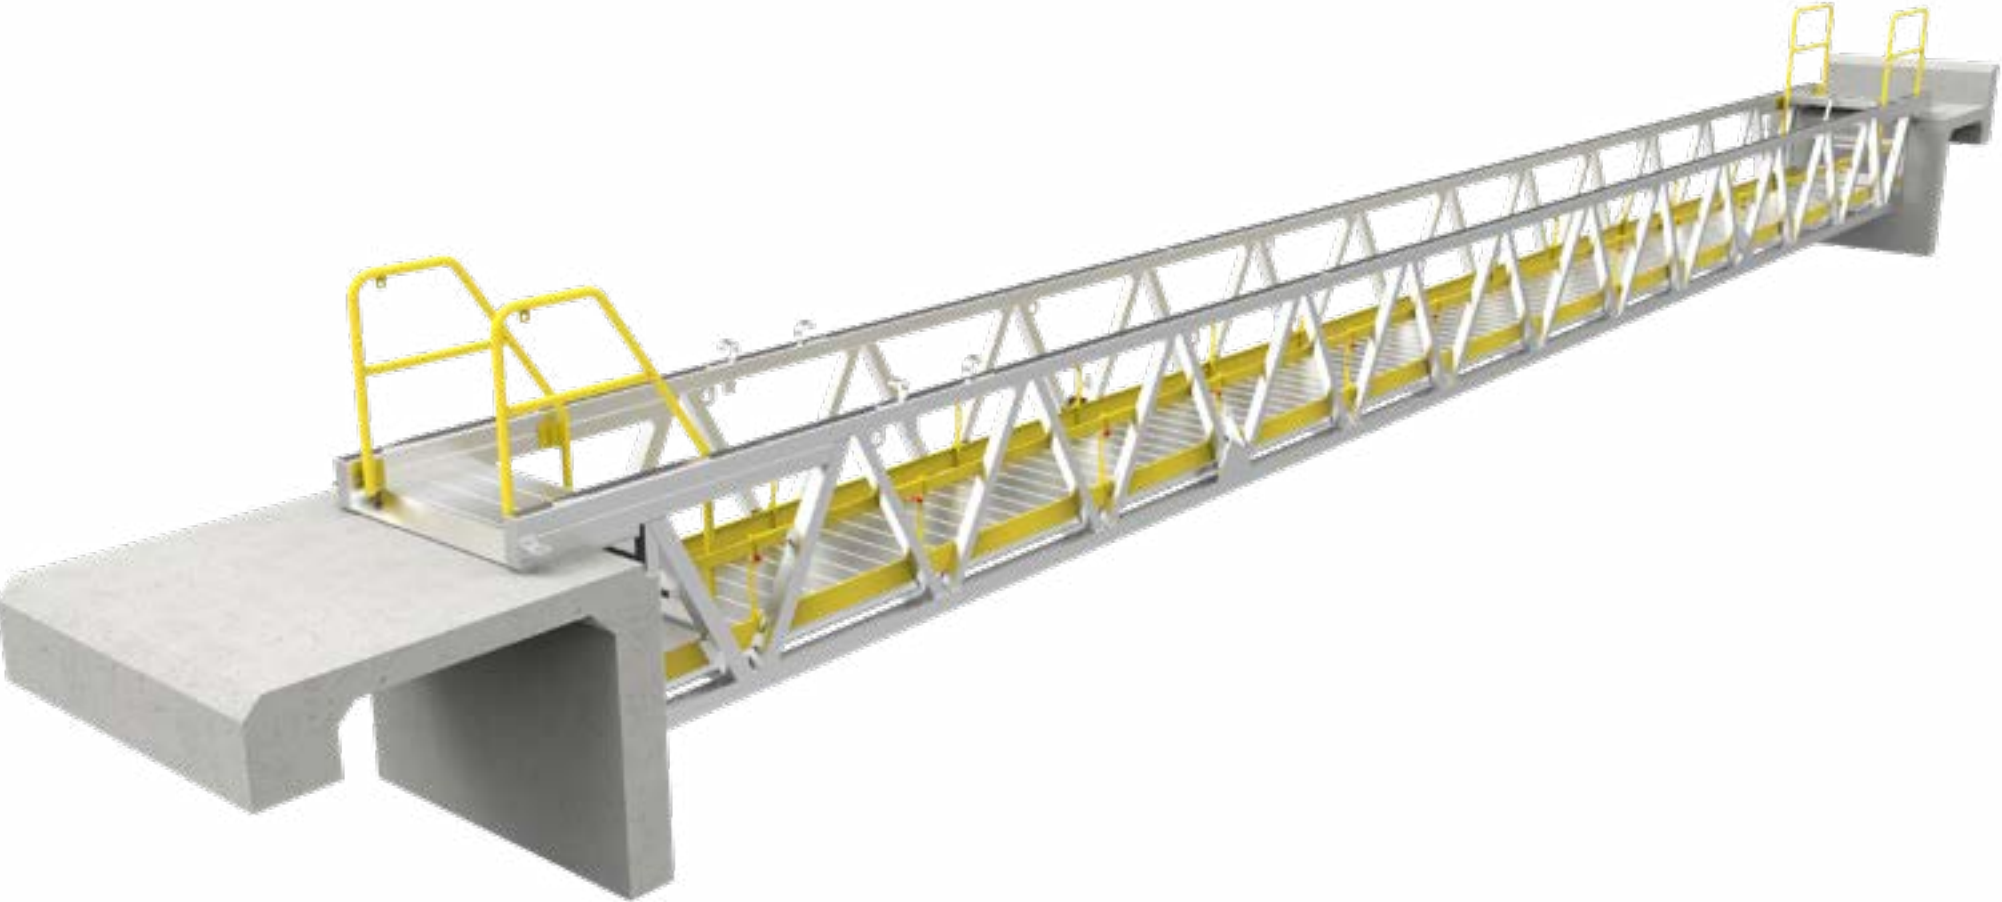

Overall span 65' 7" (20 m)	Pedestrian load 100 psf (4.8 kPa)	Bridge self-weight 3,835 lb (1,720 kg)	Bridge style Glacier
Clear width 3' 7" (1.1 m)	Vehicular load N/A	Wind pressure N/A	Options Ribbed aluminum decking, guardrails with removable midrails and kick plates in aluminum



Bridge widening

Enhance Safety

Our Jasper lightweight aluminum pedestrian bridge lane solution enhances bridge functionality and promotes improved safety and traffic flow. A bridge widening using our retrofit solution also offers a cost-saving alternative to total bridge redevelopment.

The cantilevered system is ideal for existing bridges as part of roadway bridge renovation projects or to provide safe, efficient access for pedestrian and bicycle traffic.



Tar River

Rocky Mount, North Carolina



Overall span 620' (189 m)	Pedestrian loading 90 psf (4.3 kPa)	Bridge self-weight 73,780 lb (33,535 kg)	Bridge style Jasper
Clear width 8'-6" (2.9 m)	Vehicular load 5,000 lb (2,275 kg)	Wind pressure 35 psf (1.7 kPa)	Options Ribbed aluminum decking, aluminum guardrails with horizontal rails and kick plates
			



Bridge Kits



Visual appeal

Cost-effective investment

Award-winning innovation



MakeABridge®

In addition to being aesthetically pleasing, our unique patented weld-free system uses off-the-shelf components, allowing for fast shipping and easy installation.

We offer a wide choice of finishes and options to create a durable, economical and distinctive structure customized to your specifications and needs.

Pedestrian Bridges

Specifications

Design and materials

- 100% recyclable aluminum structural components and energy-efficient recycling.
- Easy to add durable architectural finishes.
- No welding – the aluminum maintains its full structural integrity.
- Resistant to corrosion from salt water, chemicals and pollution. A permanent film of natural oxide makes the metal less impacted or corroded by the environment.
- Suited to extreme cold, aluminum does not crack at low temperatures.
- High-strength alloy construction using 6005A, 6061, 6082, AA356, AA357.
- Fasteners in stainless steel 300 series.
- Destructive testing¹ conducted at ETS (École de technologie supérieure) in Montreal (Quebec) and at the University of Waterloo (Ontario) to verify the structure's ductility.
- Integrates well with new construction and retrofits of existing structures.

Patents

- Canada 2,607,711; Canada 2,869,050
- US 8,667,633; US 8,590,084; US 7,882,586; US 7,568,253
- Patents pending WO 2010/040205 A1 – 12/495,084

Easy shipping

- Standard off-the-shelf components available in three to four weeks, ready to be shipped flat on standard-size trailers anywhere in North America, and in four to six weeks anywhere worldwide.
- Delivery is four to eight times faster than conventional welded bridges.
- Much lower shipping costs than conventional structures.
- Delivered in bundles to your construction site of 20 ft x 4 ft x 2 ft (6.1 m x 1.2 m x 0.6 m).
- Maximum weight of each component is 110 lb (50 kg).

Fast assembly and installation

- Lighter and easier to install than competitive steel, wood or concrete products.
- Assembled on site by three people with standard tools and equipment.
- Typical footbridge 30 ft (9 m) assembly in about 5 hours.

Watch the video
youtube.com/watch?v=x5K_QChK3Wg

Maintenance

Virtually maintenance-free and highly cost-effective, compared with steel when total cost of ownership (TCO)² is considered.

Vandalism

Optional anti-theft/anti-vandalism fasteners.

Warranty

15-year manufacturer's limited warranty against corrosion of the aluminum main load-bearing structure.

Awards received

The MakeABridge® system has received many design and innovation awards since 2006.

2013

Winner

Product innovation award: architectural products magazine

2010

Finalist

Génie Innovation

2009

New technology prize

Quebec Region, Canadian manufacturers & exporters and CNRC-PAR1

Honorable mention

Contech innovation trophies

Finalist

Among 487 firms participating in the VoirGRAND.tv³ competition

2008


First Place

Category structure, International Aluminum Extrusion Design Competition of ET Foundation.

2006

Finalist

Les Anges financiers competition, Montreal



¹ maadigroup.com/en/news/make-a-bridge-in-university-of-waterloo-vibration-study

² maadigroup.com/en/news/total-cost-of-ownership-aluminum-steel

³ mvivemtia.ca

Custom Design

Design options offer versatility in a cost-effective and durable structure.

Specifications

Overall span

From 20' to 60'
(6.1 m to 18.3 m)

Clear width

From 3' to 6'
(0.9 m to 1.8 m)





Structure Connection

The structure connection system allows expansion and contraction of the bridge. Each system is adapted to a particular application and is specified by MAADI Group engineers.



Anchor and bearing plates

- Specifications**
- Allow thermal expansion on one end of the bridge
 - Stainless steel anchors kit with adhesive cement included
 - Isolators included



Adaptable bearing plates

- Specifications**
- Designed to adjust on rough terrain, for either temporary or permanent use
 - Optional stainless steel anchors kit with adhesive cement (for permanent use)
 - Isolators included



Transition plate

With non-slip finishing, transition plates facilitate access to the gangway from adjacent surfaces.

- Specifications**
- Aluminum plate with anti-slip diamond treads
 - Comes with frictionless edge to protect decking surface

- Options**
- Aluminum plate with anti-slip extruded strips is available upon request

Fast assembly and installation

Lighter and easier to install
than competitive steel, wood
or concrete products

On-site assembly requiring
only three people with
standard tools and
equipment

Typical footbridge 30 ft (9 m)
assembles in about 5 hours





Easy shipping

Off-the-shelf components ready to be shipped on standard-size trailers


Delivery is four to eight times faster than for conventional welded bridges

Much lower shipping costs than conventional structures

Delivered in bundles measuring 20 ft x 4 ft x 2 ft (6.1 m x 1.2 m x 0.6 m) or pre-assembled

Maximum weight of each component is 110 lb (50 kg)




Live Load Capacity

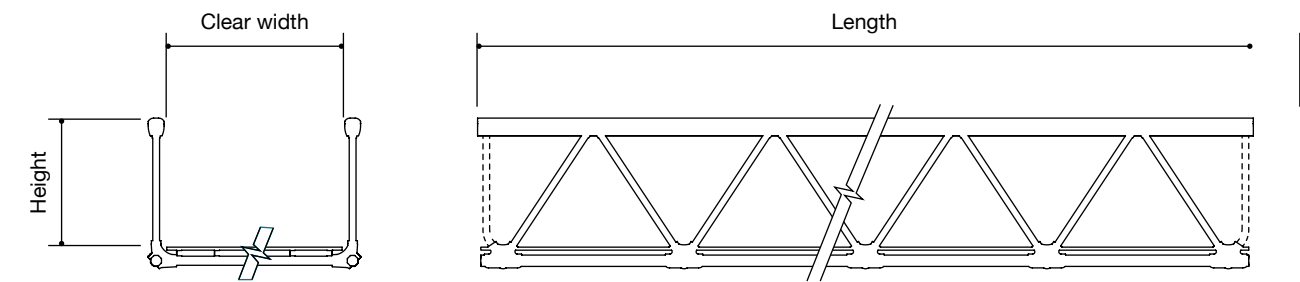


Minimum height 54" (1,372 mm)



Minimum height 42" (1,067 mm)

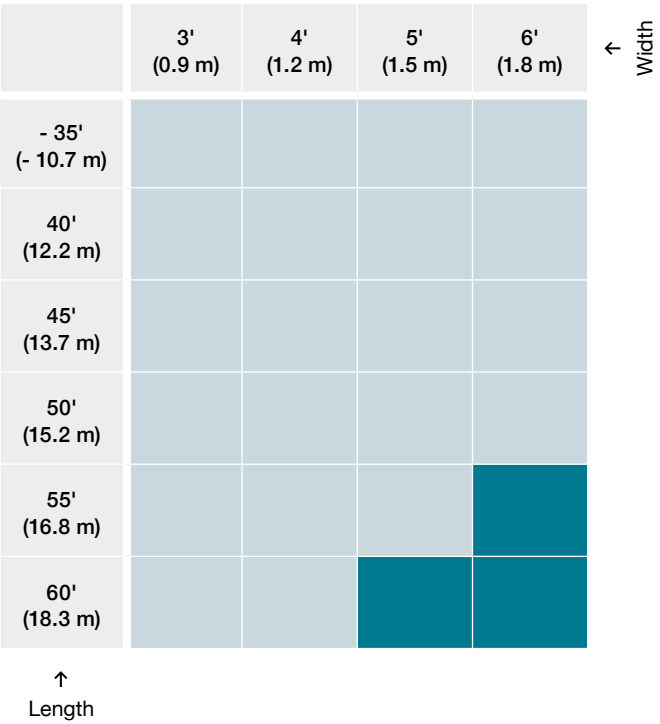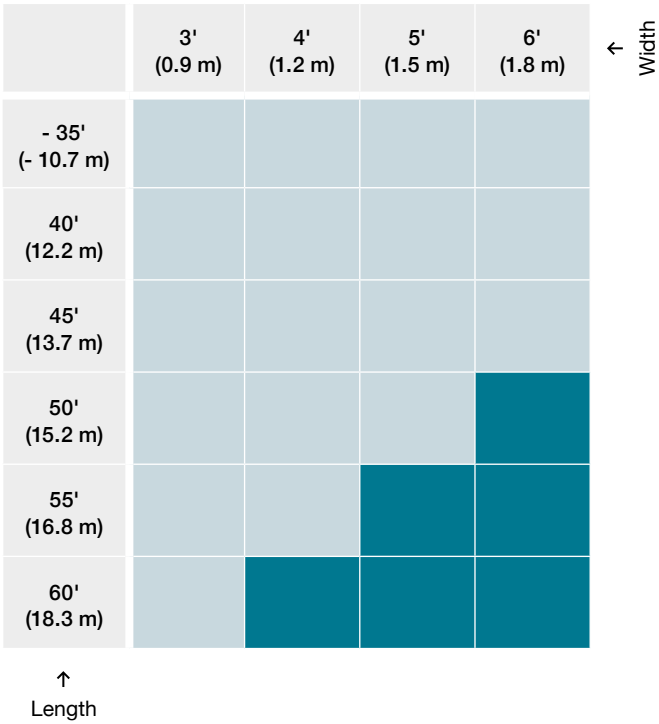

Destructive Structural Testing

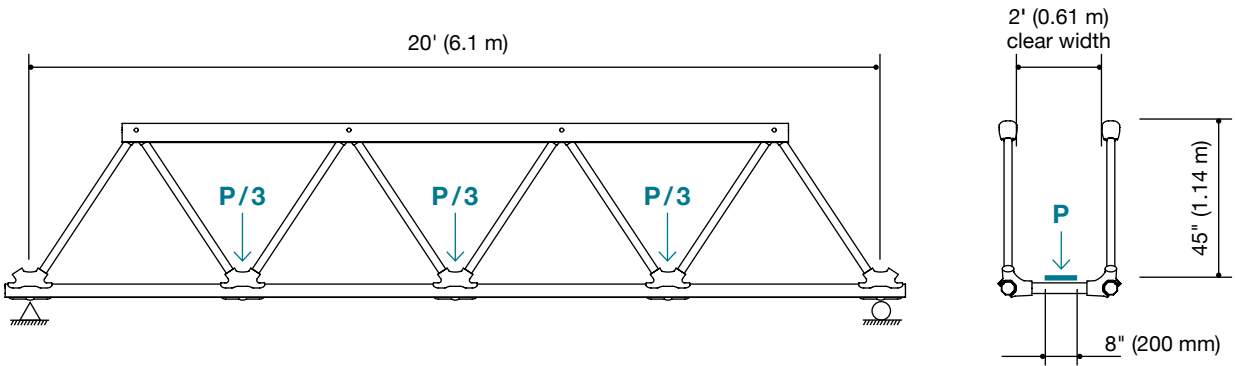

A destructive structural test was conducted at the University of Waterloo, Waterloo, Ontario, Canada in the Department of Civil and Environmental Engineering Structures Laboratory to determine the maximum load capacity of a MakeABridge® bridge system.

The specimen consisted of a 20 ft (6,1 m) long by 2 ft (0,61 m) wide aluminum pony-truss structure, fabricated using aluminum extruded sections and cast joints developed by MAADI Group. The size was reduced to fit the specimen in the U of W test frame.


The load was introduced via a “load tree” which consisted of two simply supported steel I-beams loaded to facilitate the splitting of the jack load (i.e., the total load) into three equal point loads, to be introduced at each of the three interior panel points of the truss. The three point loads were introduced via machined aluminum bearing pads. The specimen sat on two end supports, one pin and one roller.

Watch the video
maadigroup.com/en/resources

Test data

This curve shows the initial linear behavior. Softening of the specimen occurs very gradually, making it difficult to identify a load coinciding with the onset of non-linear behavior. The peak total load obtained was 41 kips (183 kN). At this load, vertical deflection at the mid-span was approximately 2.4" (61 mm). The specimen exhibited some ductility beyond this peak load; final failure occurred at a total load of 35.2 kips (157 kN) and a mid-span deflection of approximately 3.15" (80 mm).

Total load (kN) vs. Displacement (mm)

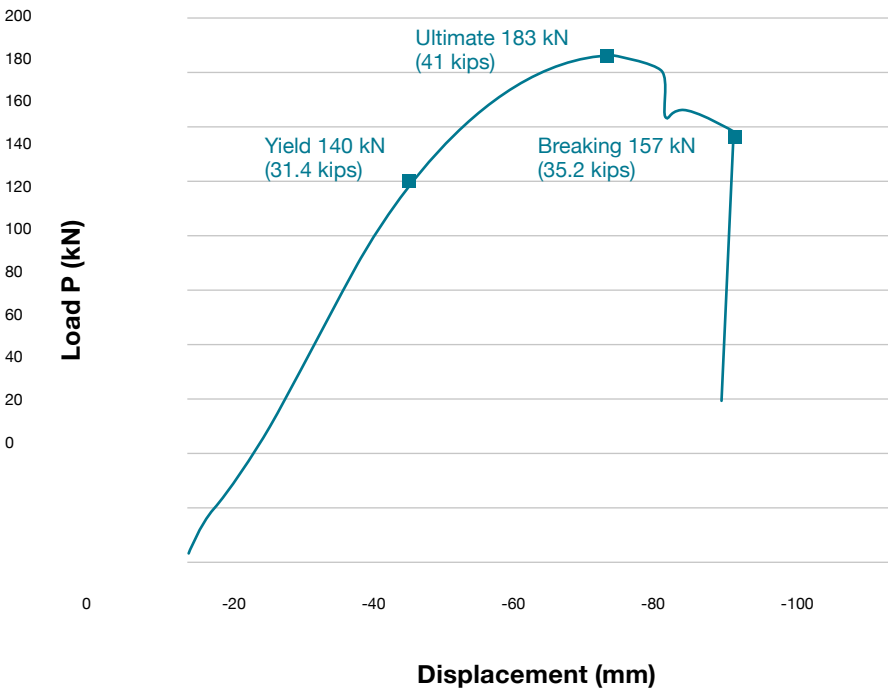

Developments and Studies

Vibration was undertaken in 2014 and is ongoing at the University of Waterloo in Waterloo, Ontario, Canada, at the Department of Civil and Environmental Engineering Structures Laboratory.

Around
30 repetitions
were recorded
for each test type



Research on vibration behavior

In order to better understand the behavior of aluminum pedestrian bridges subjected to crowd-induced vibrations, a research project was undertaken at the University of Waterloo, with financial support provided by the Aluminum Association of Canada (AAC) and the Natural Sciences and Engineering Research Council of Canada (NSERC). The industry partner for this project, MAADI Group, supplied a 75 ft-long aluminum pedestrian bridge “specimen”, which could be installed in the Waterloo Structural Testing Laboratory at any desired span between 10 ft and 75 ft.

The experimental setup offered a number of important benefits, which can be summarized as follows:

- In contrast to vibration studies performed on pedestrian bridges in the field, with the laboratory testing approach it was possible to install load cells under each of the four support points to capture the dynamic reaction loads in the vertical, lateral, and longitudinal directions, as pedestrians walked across the bridge, individually or in groups.
- With the employed bridge system, it was easy to investigate otherwise identical bridges, with a wide range of spans and stiffness.
- With the employed bridge system, it was possible to add/remove elements (e.g., lateral cross-bracing) to alter the dynamic bridge response.

Load cell data

One of the main goals of this research has been to collect data for the purpose of assessing the suitability of the various available international pedestrian bridge design standards for application to aluminum structures.

For each test type, acceleration and load cell data was collected. If possible, around 30 repetitions were recorded for each test type (specimen configuration, pedestrian volume, walking speed) to ensure statistical significance. Acceleration data was transformed into the frequency domain, so that critical frequencies could be identified.

Future research directions

Work in this area is ongoing, thanks to a new collaborative project between the University of Waterloo and MAADI Group. Among other things, this work is taking a critical look at the design provisions for pedestrian bridges using a probability framework, similar to the one structural engineers are more familiar with for the calibration of strength provisions in design codes.

While it must be recognized that there are many sources of uncertainty that come into play in predicting the vibration behaviour of a pedestrian bridge, this approach makes it possible to apply some degree of rigor to the process, and may provide a rationale for future design code modifications to ensure more consistent levels of safety against serviceability failures due to poor vibration performance under crowd loads.

Conclusions

In conclusion, aluminum, with its light weight and good durability characteristics is finding its place in pedestrian bridge applications. The confidence that can be placed in its use is growing at an accelerated pace, thanks to research projects such as the one highlighted in this article.

For further details on the full test program and data post-processing methods employed in this study, visit maadigroup.com/en/news/make-a-bridge-in-university-of-waterloo-vibration-study

Customization



Guardrails

MAADI Group guardrail systems offer safe and practical solutions that are also attractive. Our guardrails comply with Canadian and American bridge codes and standards.



Vertical pickets

Material and finish

- Extruded aluminum with clear anodized finish

Specifications

- Less than 4" (102 mm) between pickets – National Building Code of Canada
- Less than 6" (152 mm) between pickets – CSA S6-19 Canadian Highway Bridge Design Code)

Heights

- Pedestrians: 42" (1,067 mm)
- Cyclists: 54" (1,372 mm)

Options

- Other colors and finishes are available upon request

[More details](#)

Guardrails

Whether you use MakeABridge® in an industrial plant, an office building or a park, our high-strength aluminum alloy guardrail systems are corrosion-resistant and can be counted on for strength and long-term durability.



Horizontal railings

Material and finish

- Extruded aluminum with clear anodized finish

Specifications

- Less than 6" (152 mm) between railing – CSA S6-19 Canadian Highway Bridge Design Code)

Heights

- Pedestrians: 42" (1,067 mm)
- Cyclists: 54" (1,372 mm)

Options

- Midrails also available
- Other colors and finishes are available upon request

[More details](#)



Custom design


Options

- Personalize the guardrails with your own design

Decking Materials

Our engineers will guide you in choosing the most suitable decking for the use of the structure, taking into account safety and maintenance.

Compare the different choices using our [table](#).

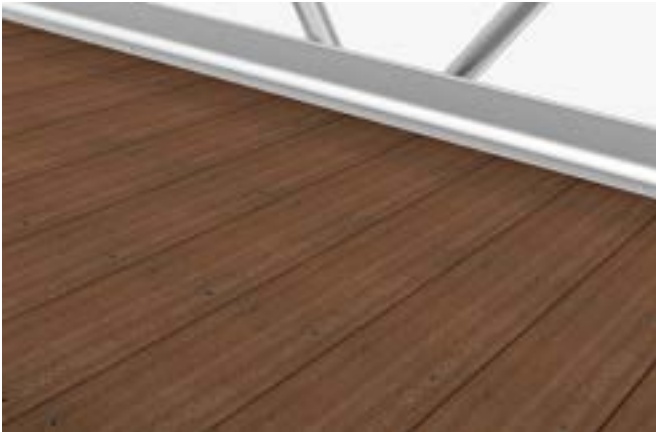

Ipe hardwood

Specifications

- Naturally very resistant to decay, rot and insect attack
- Minimum 40-year lifespan depending on use
- Low maintenance, no treating or sealing required for durability (treating may be required to keep the original color)
- Straight grain with fine to medium texture
- Economical over life of the structure
- Average density of 69 lb/ft³ (1,100 kg/m³)

Dimensions

- Outside corner S4S
- Width varies between 5" and 7 3/8" (127 mm and 188 mm)
- Thickness varies according to the loads and applications between 1" and 1 1/2" (25 mm et 40 mm)

Options

- Available in pressure-treated pine wood planks and in incised hemlock wood planks
- Other wood decking options are available upon request

Composite

Specifications

- Designed to resist rot, warping and fading
- Minimum 25-year lifespan depending on use
- Anti-slip ribbed surface
- Low maintenance – no treatments or sealers required
- Economical over life of the structure
- Density of 75 lb/ft³ (1,195 kg/m³)
- Fastened with stainless steel screws

Materials



- A blend of wood flour and high-density polyethylene

Dimensions

- S4S outside corner
- 7/8" x 5 1/2" (22 mm x 140 mm)

Color

- Sand (other colors are available upon request)

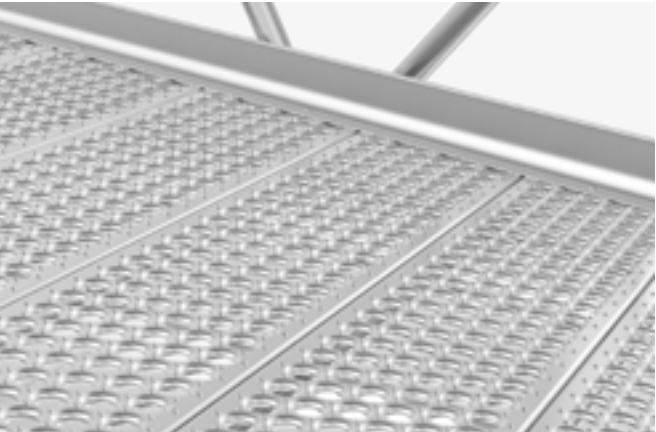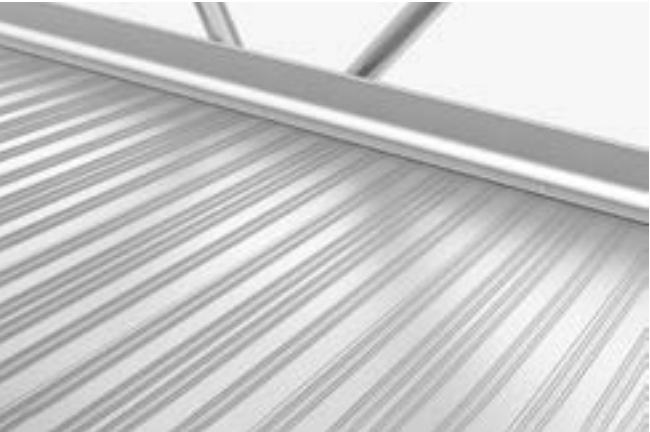

Ribbed aluminum

Specifications

- Unlimited lifespan with regular cleaning
- High grip ribbed tongue and groove planks
- Maintenance-free and corrosion-resistant – no treatments or sealers required
- 100% recyclable and reusable
- Economical over life of the structure
- Fastened with stainless steel screws

Material and finish

- Extruded aluminum alloy with natural finish – no paint or treatment required

Option

- Durable polyester powder coating for extra adherence also available upon request
- Compliant to AAMA 2604-10 & ASTM D3359
- Available in two colors: beige and gray (other RAL colors are available upon request)

Shur grip

Specifications

- Unlimited lifespan with regular cleaning
- High grip surface
- Maintenance-free and corrosion-resistant – no treatments or sealers required
- Transversal planks have integral side channels
- Safety grating planks have debossed holes, each surrounded by 6 perforated buttons
- 100% recyclable and reusable
- Economical over life of the structure

Material and finish

- Extruded aluminum alloy with natural finish – no paint or treatment required

Option

- Grip span planks are also available
- Other decking options are available upon request

Options

Various options are offered to further customize your structure to best suit the application and the surrounding environment.



Integrated kick plates

- Specifications**
 - Help prevent objects from falling and provide a higher level of security
- Material and finish**
 - Extruded aluminum alloy with clear anodized finish
- Dimensions**
 - Height: 4" (102 mm)



Handrails

- Material and finish**
 - Extruded aluminum alloy with clear anodized finish
- Dimensions**
 - Diameter: from 1 1/4" to 2" (from 32 mm to 50 mm)
 - 2" (50 mm) hand clearance
- Height**
 - Standard: 36" (915 mm)
 - ADA¹: 24" (610 mm)
- Option**
 - Double handrails (ADA¹) are available upon request



Integrated LED lighting system

- Specifications**
 - Integrated into the guardrails
- Options**
 - Programmable RGB LED
 - White LED

¹ Americans with Disabilities Act



Finishes

Powder coating

Specifications

- Available in two colors: beige and gray
- Made of powdered polyester resin
- Baked as per specifications
- Meets AAMA¹ standards
- Not recommended for use on aluminum decking

Options

- Other RAL colors are available upon request


Anodization

Specifications

- Available in five colors: clear, champagne, light bronze, architectural bronze and black
- Meets all requirements of the Aluminum Association (AA) for the anodized architectural aluminum
- Meets AAMA 611¹ standards
- Meets AA-M10C21A41² for clear finish and AA-M10C21A44² for Champagne, Light bronze, Architectural bronze and black finishes
- Only extruded parts can be anodized

Options

- Other RAL colors are available upon request

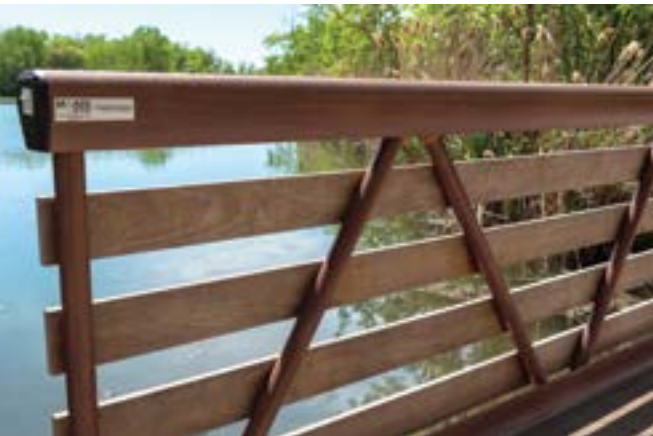

Faux-wood

Specifications

- Made of polyurethane based thermosetting powder paint
- Baked as per specifications
- Meets American Architectural Manufacturers Association (AAMA) standards
- Compatible with natural surroundings
- Recommended for use with Ipe hardwood horizontal railing and decking

¹ American Architectural Manufacturers Association
² Aluminum Association Designation system

Projects



Boulé Street

Saint-Constant, Quebec



Overall span
55' 4" (16.9 m)

Clear width
5' 11" (1.8 m)




Pedestrian load
84 psf (4 kPa)

Vehicular load
2,200 lb (1,000 kg)

Bridge self-weight
4,620 lb (2,100 kg)

Wind pressure
8.4 psf (400 Pa)

Options
Ribbed aluminum decking with beige coating finish, black anodized aluminum truss structure with integrated LED lighting system, black anodized aluminum guardrails with vertical pickets railings

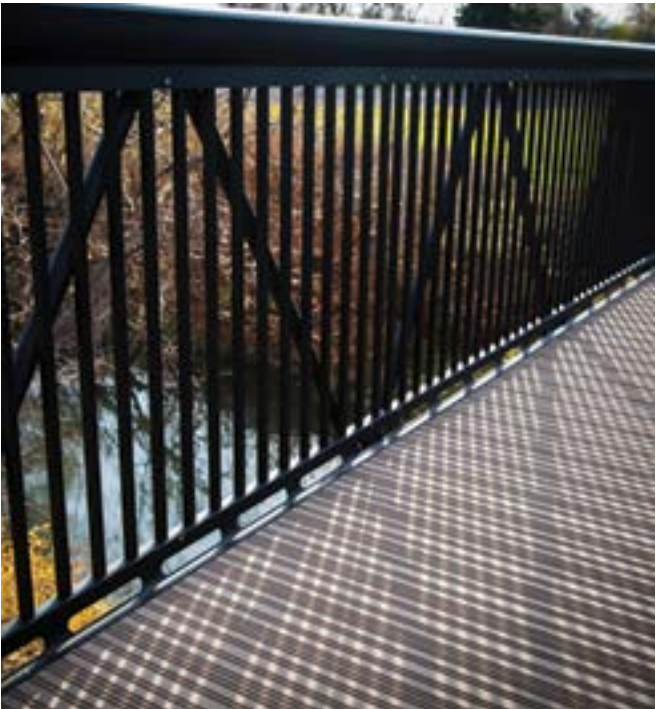

Argyll Linear Path

Brome Lake, Quebec



Overall spans 35', 48' 9" & 55' 7" (10.7 m, 14.9 m & 16.9 m)	Pedestrian load 84 psf (4 kPa)	Bridge self-weight 4,290 lb, 3,850 lb & 2,750 lb (1,950 kg, 1,750 kg & 1,250 kg)	Options Ribbed aluminum decking with beige coating finish, truss structure, guardrails with horizontal railings and kick plates in clear anodized aluminum
Clear width 5' 11" (1.8 m)	Vehicular load ATV: 2,510 lb (1,140 kg) Trailer: 1,500 lb (680 kg)	Wind pressure 7.7 psf (370 Pa)	



Centennial Park

Dollard-des-Ormeaux, Quebec



Overall span 23' 4" (7.1 m)	Pedestrian load 84 psf (4 kPa)	Bridge self-weight 2,420 lb (1,200 kg)	Options Decking and horizontal railings in ipe hardwood, truss structure, guardrails and kick plates in aluminum faux-wood finish
Clear width 5' 11" (1.8 m)	Vehicular load N/A	Wind pressure 8.4 psf (400 Pa)	
 			



Ruisseau Clair Stream

Mont-Tremblant, Quebec



Overall span 32' 10" (10 m)	Pedestrian load 84 psf (4.0 kPa)	Bridge self-weight 3,300 lb (1,500 kg)	Options Ipe hardwood decking, truss structure, guardrails with vertical pickets and kick plates in clear anodized aluminum
Clear width 5' 11" (1.8 m)	Vehicular load 1,100 lb (500 kg)	Wind pressure 18.8 psf (900 Pa)	



Hermel Home Port

Sept-Îles, Quebec



Overall span 20' & 26' (6.1 m & 7.9 m)	Pedestrian load 100 psf (4.8 kPa)	Bridge self-weight 1,500 lb & 1,150 lb (680 kg & 520 kg)	Options Ribbed aluminum decking, aluminum kick plates, guardrails with midrails and double handrails
Clear width 3' (0.9 m)	Vehicular load N/A	Wind pressure 11.3 psf (540 Pa)	
			



Skelton Hydroelectric Dam

Dayton, Maine



Overall span 22' 5" (6.8 m)	Pedestrian load 100 psf (4.8 kPa)	Bridge self-weight 1,285 lb (583 kg)	Options Ribbed aluminum decking, aluminum guardrails with midrails and kick plates
Clear width 4' (1.2 m)	Vehicular load N/A	Wind pressure 8.3 psf (400 Pa)	




Aluminum Bridge Decking

Durable and tough

Fast installation

Cost effective

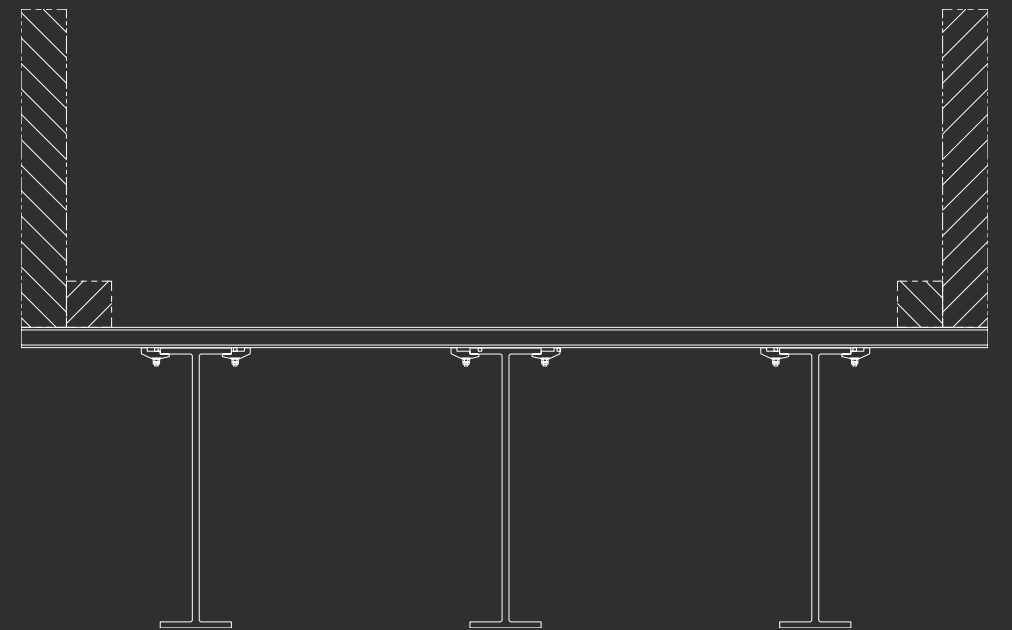



GuarDECK®

MAADI Group specializes in aluminum bridge decking that is unmatched for durability and lasts several decades. This engineer-designed product is ideal for new or existing bridge retrofit with quick installation and minimal disruption to people and traffic.

MAADI Group works with municipalities, developers, architects, construction companies, governments and other parties to offer innovative Accelerated Bridge Construction (ABC) that cuts down on traffic interruptions and costly traffic control.

Bridge Decking

Whether replacing existing decking on an older bridge or building a new one, GuarDECK® saves time as the mechanical connections are fast and easy to install.

The lightweight system is specially tailored for pedestrians, 15-ton vehicles or less, movable bridges, civil security, temporary bridges, military bridges, maritime structures, and construction platforms.





Specifications

Design and materials

- 100% recyclable aluminum structural components and energy-efficient recycling.
- Integrates well with new construction and retrofits of existing structures.
- Resistant to salt water, chemicals, and pollution due to its permanent, natural oxide film that prevents corrosion of the aluminum by the environment.
- No welding – the aluminum maintains its full structural integrity.
- Custom T-bolts fasteners in stainless steel 316 series.
- Built-in ribs provide an anti-slip surface.
- Includes dielectric and anti-slip coating between steel and aluminum components.
- No on-site drilling.

Patents

Patent pending

Customization

- Aluminum guardrails with a choice of styles and durable anodized and baked paint finishes.
- Optional aluminum curbs
- Optional integrated LED lighting system also available

For more details, [click here](#).

Award received

In 2020, GuarDECK® won 1st place in the Architectural/ Structural category at the 2020 Aluminum Extrusion Design Competition, organized by the [ET Foundation](#).

Easy shipping

- Standard off-the-shelf components available in four weeks, ready to be shipped flat on standard-size trailers anywhere in North America, and in eight weeks anywhere worldwide.

Fast assembly and installation

- Lighter and easier to install than competitive steel, wood or concrete products.
- A team can install a weld-free aluminum deck and open the bridge to traffic later that same day.

Maintenance

Virtually maintenance-free and highly cost-effective, compared with steel when total cost of ownership (TCO)¹ is considered.

Vandalism

Optional anti-theft/anti-vandalism fasteners.

Warranty

We offer a One-Year Limited Warranty on aluminum against material failure, defects and corrosion.



¹ maadigroup.com/en/news/total-cost-of-ownership-aluminum-steel

This game-changing aluminum bridge decking offers incredible advantages over traditional concrete and steel construction, such as a lighter weight, resistance to corrosion, and less maintenance.





Applications

- Pedestrian and up to 15-ton vehicle bridges
- Maritime Structures
- Civil Security Bridges
- Temporary Bridges
- Military Bridges
- Industrial Bridges
- Extend roadway bridge for cantilevered bike path

A Cut Above

Durability

Ease

Versatility

Longer bridge life

GuarDECK™ represents a cut above in factory aluminum bridge decking. Consistent manufacturing and quality control mean that MAADI Group can deliver faster installation that’s also better quality than field-built decks.

This engineer-designed product is ideal for new or existing bridge retrofit with quick installation and minimal disruption to people and traffic. Whether permanent or temporary, this product fits well into most environments and situations where durability and rapid installation are top priority.

Facts on aluminum decking

A North American study¹ shows that older projects using aluminum decking instead of concrete, steel and wood have stood the test of time. Between 1946 and 1963, nine bridges were built with aluminum beams and girders and six still exist. Gradually more countries, such as Japan, Norway and Sweden are recognizing the benefits of aluminum versus steel construction, and are using aluminum extrusions in the repair and construction of bridge decks.

¹ www150.statcan.gc.ca/n1/pub/11-621-m/11-621-m2008067-eng.htm

A foundation for good roads

GuarDECK® facilitates seamless connections between secondary roads, bike paths, trails, pathways and other structures. It solves complex issues of deficient, narrow or outdated bridges, providing ready made solutions that endure.

Lighter than steel

Aluminum bridge decks are 70 to 80 percent lighter than concrete and most metal, (about 10 psf – 0.5 kPa), which makes it easier to handle and install. This lightweight, versatile material reduces dead load and offers increased bridge width and capacity without the need to strengthen supporting bridge elements. This is especially important for load-restricted bridges, historic bridges, movable bridges and bridges with narrow roadways requiring expansions for bicycle paths or walkways.

Hardwearing and resilient

Using marine grade aluminum, our bridge decks are virtually maintenance-free and require no chemical treatments that are harmful to human health and the environment, such as those used to protect steel and wood. Lasting up to 100 years, and naturally resistant to corrosion, this bridge deck type is better suited–than steel or concrete–to de-icing during colder months.

Accelerated Bridge Construction (ABC)

This unique type of construction allows for a quick-turnaround installation when compared to concrete which typically requires extensive formwork and curing time.

Reducing costs matters

Using GuarDECK™ could mean decreasing costs for movable bridges and bridges with long spans where dead weight is considerable.

In-factory for faster turnaround

GuarDECK™ is prefabricated in our factory and shipped ready to install with standard manual tools. This system uses custom aluminum hollow extrusions that attach easily to the main steel I-beams with special stainless steel fasteners and clamps. Prefabricated aluminum deck

extrusions can be installed faster than other systems and require no on-site drilling or welding.

Stands up to cold

This product is ideal for bridges and other highway structures in colder climates. It eliminates concerns about brittle fracture, even in the most severe Arctic weather. The strength of aluminum increases with extremely low temperatures.

Aluminum: The eco-conscious metal

MAADI Group is sensitive to climate change. To that end we have designed GuarDECK® to reduce your project’s carbon footprint by using 20 percent recycled aluminum and renewable energy. And we use the most innovative, energy efficient technology to produce the remaining 80 percent of your bridge deck.

Aluminum bridge decks last generations and the components are 100 percent recyclable, and potentially reusable. About 75 percent of all aluminum ever produced is still in use today thanks to recycling programs.

Versatile designs

Due to its lightweight and versatile nature aluminum can be shaped into a myriad of designs. Attractive and heavy-duty at the same time, this material creates bridge decking that integrates well into all built and natural environments. Our deck surface also has built-in ribs to prevent slipping.

Increased use

A wide variety of cross-sectional shapes of aluminum extrusion has led to the increased use of aluminum for bridge decks. This has signaled the potential in North America and worldwide for its use in other applications.

Aluminum’s time has come

Over the past decades, aluminum has seen improved properties and advances in knowledge concerning aluminum’s mechanical behavior, along with much improved alloys and tempers. The structural engineering community is already using this knowledge, which is gradually translating into more governments and municipalities recognizing the advantages of aluminum.

Specifications

Overall bridge span

Unlimited

Clear width

Varies with I-beam spacing

Pedestrian load


Up to 90 psf (4.3 kPa)

Vehicular load

Up to 33,000 lb (15,000 kg)

Decking self-weight

10 psf (0.5 kPa)

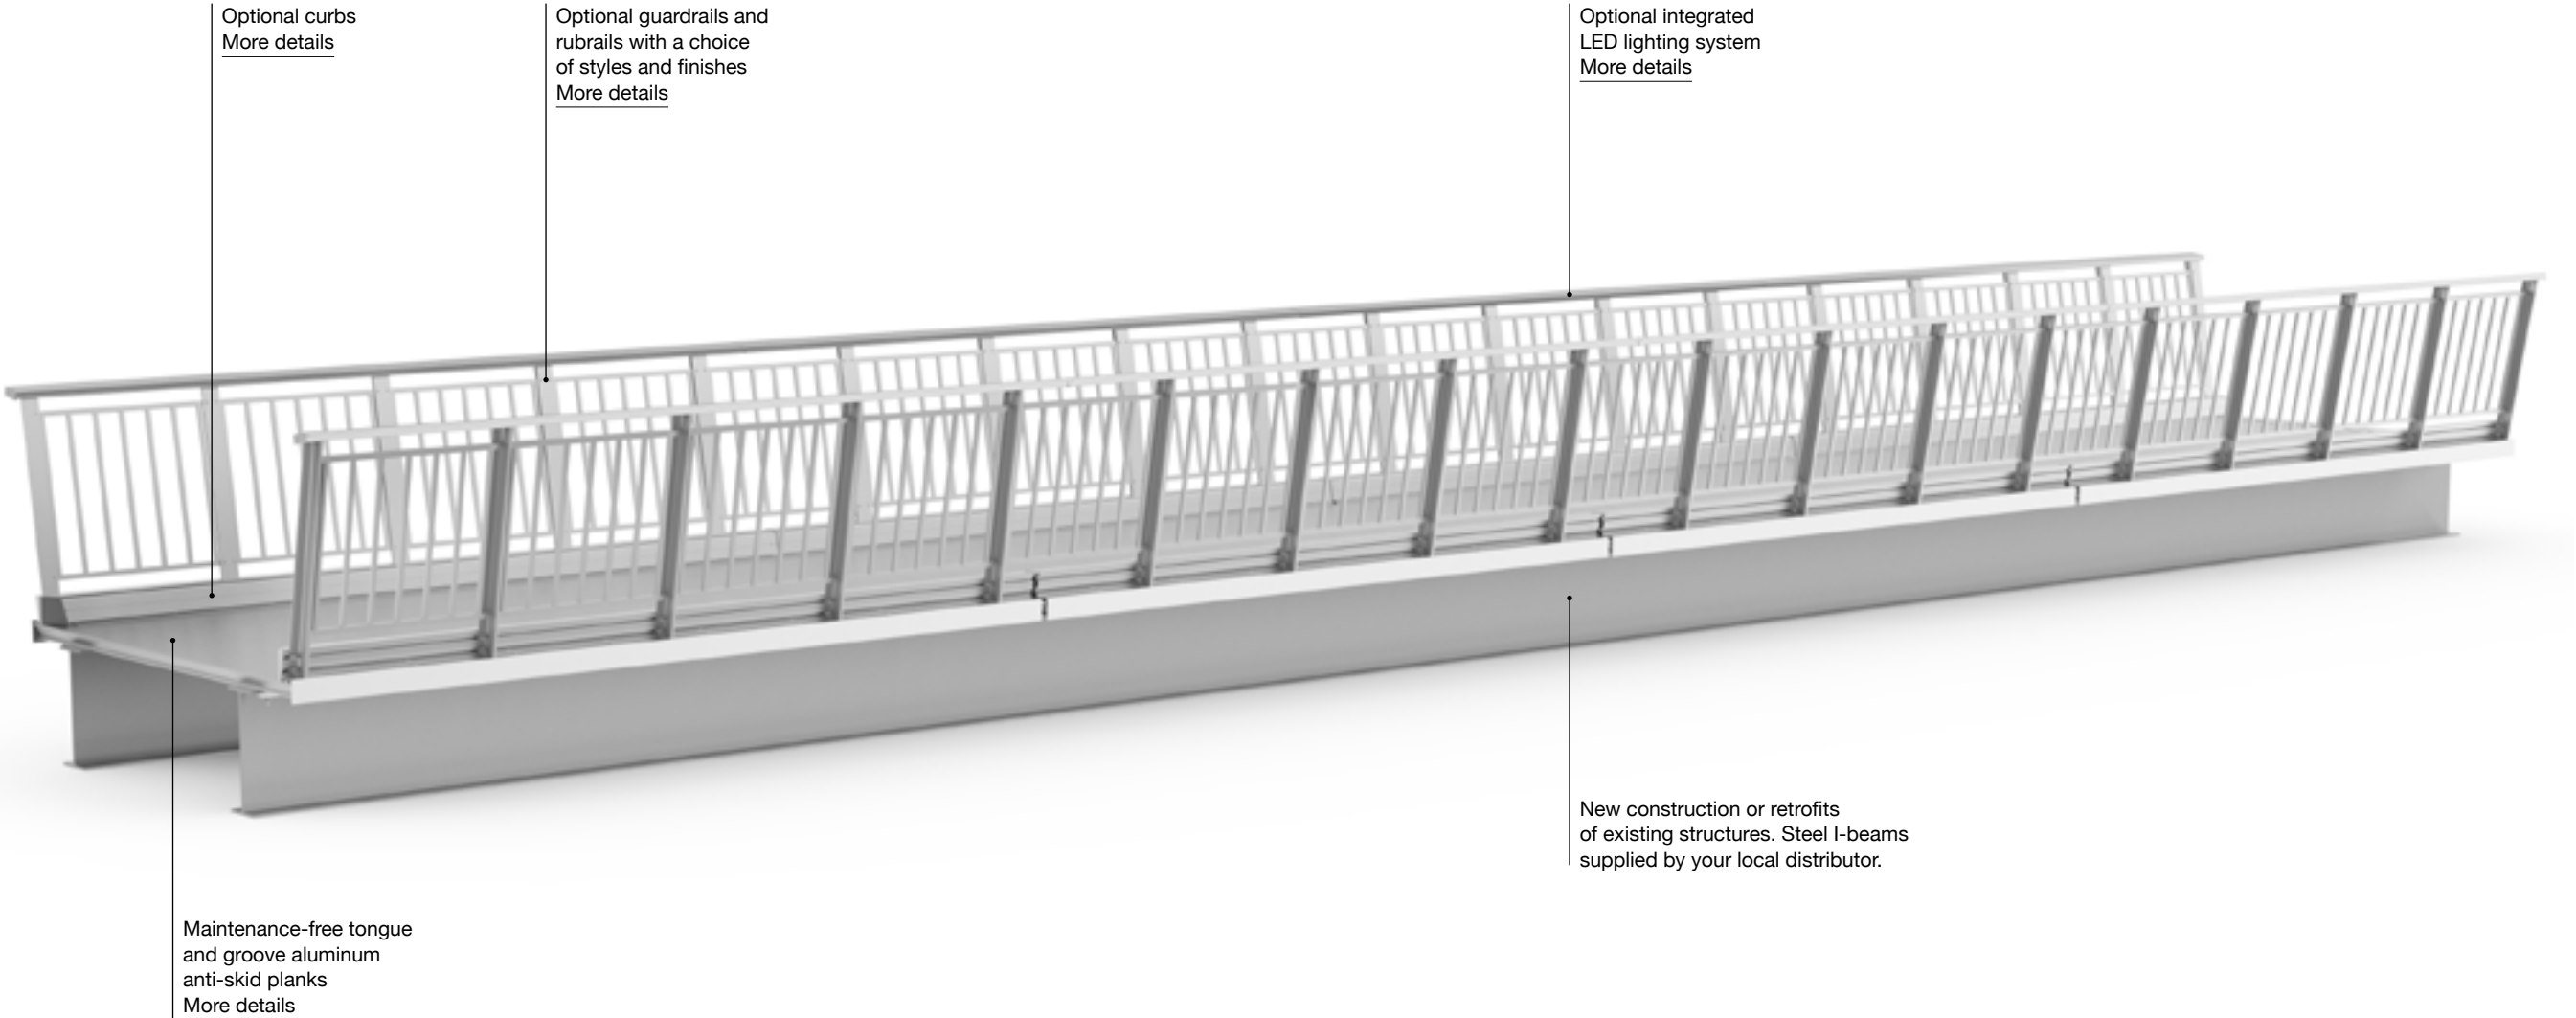

Optional curbs
[More details](#)


Optional guardrails and
rubrails with a choice
of styles and finishes
[More details](#)

Optional integrated
LED lighting system
[More details](#)

Maintenance-free tongue
and groove aluminum
anti-skid planks
[More details](#)


New construction or retrofits
of existing structures. Steel I-beams
supplied by your local distributor.

Vehicular Load

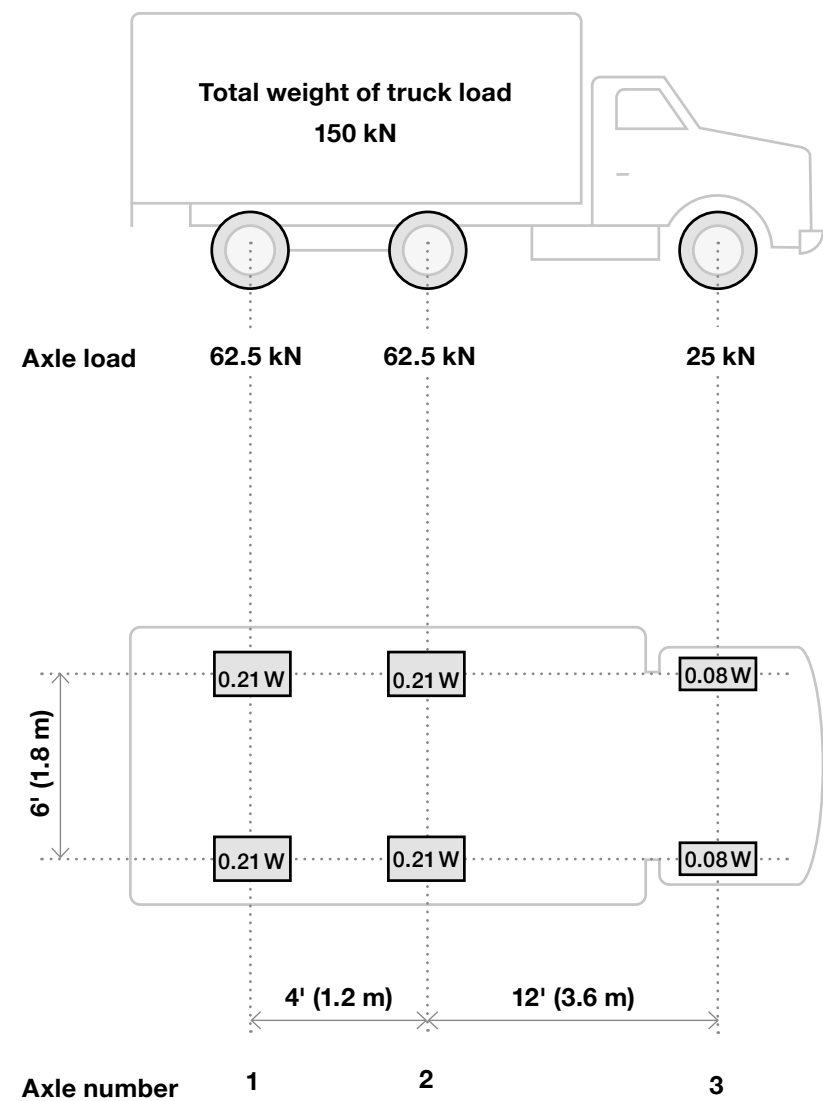

The vehicular load shall not be combined with pedestrian load.
W = Total weight of truck load

Load Chart

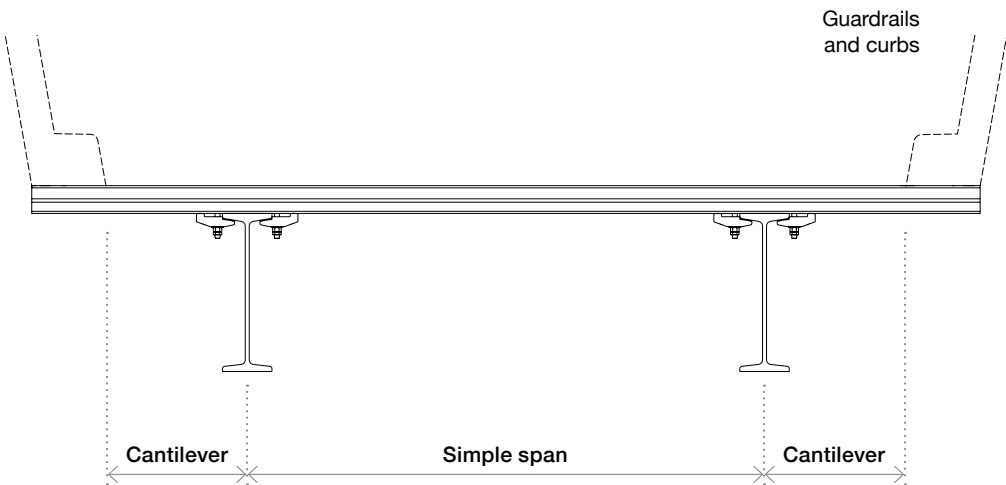

Standard	Load	Maximum simple span		Maximum cantilever	
		(ft)	(m)	(ft)	(m)
AASHTO LRFD Bridge Specification (7th Edition) & Guide for Pedestrian Bridges (2009)	Pedestrian 90 psf (4.3 kPa)	13.00*	3.96*	7.21*	2.20*
	H5 Truck 10,000 lb (44.5 kN)	9.52	2.90	2.40	0.73
	H10 Truck 20,000 lb (89 kN)	4.79	1.46	1.20	0.37
International Building Code (2018) & Aluminum Design Manual (2015)	Walkways & platforms 60 psf (2.87 kPa)	14.88*	4.53*	8.82*	2.69*
	Yards & pedestrians 100 psf (4.8 kPa)	12.55*	3.82*	7.44*	2.27*
	Areas accessible by vehicles 250 psf or 8,000 lb (12 kPa or 35.6 kN)	5.24	1.60	1.31	0.40
CSA S6-19	Pedestrian 83.5 psf (4 kPa)	13.35*	4.07*	7.91*	2.41*
	Maintenance vehicle 18,000 lb (80 kN)	6.22	1.89	1.56	0.47
NBCC 2015 & CSA S157-17	Footbridges 100 psf (4.8 kPa)	12.56*	3.83*	7.45*	2.27*

For preliminary design purposes only. Cantilever span exclude guardrails and railings.
* Span values are controlled by deflection criterias:
- L/360 for simple spans
- L/180 for cantilever spans (L/220 for AASHTO)



Easy Installation and Handling

Our premium bridge decking product is designed for easy installation. Versatile and sturdy, GuarDECK® is also built to fit a range of different environments and applications.



Installation

Specifications

- No on-site drilling or welding
- Easy to install clamping system that bolts directly into the planks

Fasteners

- Custom T-bolt fasteners in stainless steel 316 series
- Extruded aluminum heavy-duty clamps

Option

- Optional anti-theft/anti-vandalism fasteners

Anti-skid aluminum decking

Specifications

- Unlimited lifespan with regular cleaning
- High grip surface
- Maintenance-free and corrosion-resistant – no treatments or sealers required
- 100% recyclable and reusable
- Economical over life of the bridge/structure

Material

- Natural finish extruded aluminum alloy tongue and groove planks – no paints or coatings required

Option

- Polyurethane based coating combined with an aggregate dressing provides an extremely durable slip and skid resistant surface

[More details](#)

Existing Bridge Retrofit

Before



This off-the-shelf product is ideal for existing bridge retrofit with fast installation and little disturbance to pedestrians and vehicles.



After



← Retrofit of existing bridge, Brome Lake, Quebec

Customization





Options

Various options are offered to further customize your project to best suit the application and the surrounding environment.



Guardrails with vertical pickets

- Material and finish**
 - Extruded aluminum alloy with clear anodized finish
- Specifications**
 - Less than 4" (102 mm) between pickets – National Building Code of Canada
 - Less than 6" (152 mm) between pickets – CSA S6-19 Canadian Highway Bridge Design Code)
- Heights**
 - Pedestrians: 42" (1,067 mm)
 - Cyclists: 54" (1,372 mm)
- Options**
- Styles**
 - Horizontal railings and custom design or available upon request
- Architectural finishes**
 - Other anodization colors and powder coat finish are available upon request
- More details

Options



Handrails

Material and finish

- Extruded aluminum alloy with clear anodized finish

Dimensions

- Diameter: from 1 1/4" to 2" (from 32 mm to 50 mm)
- 2" (50 mm) hand clearance

Height

- Standard: 36" (915 mm)
- ADA¹: 24" (610 mm)

Option

- Double handrails (ADA¹) are available upon request

Curbs

Specifications

- Help prevent objects from falling and adds a higher level of security.

Material and finish

- Extruded aluminum alloy with clear anodized finish



Integrated LED lighting system

Specifications

- Integrated into the guardrails

Options

- Programmable RGB LED
- White LED

Anti-skid surface coating

Specifications

- Minimum 20-year lifespan depending on use
- Maintenance-free and impervious – no treatments or sealers required

Materials

- Polyurethane based system combined with an aggregate dressing provides an extremely durable slip and skid resistant surface

Option

- Available in two aggregate dressing finishes: for pedestrians and cyclists or for lightweight vehicles

¹ Americans with Disabilities Act

Projects




Îles-de-Boucherville National Park

Boucherville, Quebec



Overall spans 143' 2", 214' 3" & 420' 9" (43.6 m, 65.3 m et 128.3 m)	Pedestrian load 84 psf (4 kPa)	Decking self-weight 10 psf (0.5 kPa)	Options N/A
Clear width 11' 6" (3.5 m)	Vehicular load 33,000 lb (15,000 kg)	Wind pressure 52 psf (2.48 kPa)	



Design/build of
aluminum decking
over a series
of pedestrian &
15-ton vehicle
bridges




Retrofit of Existing Bridge

Brome Lake, Quebec



Overall span 106' 3" (32.4 m)	Pedestrian load 84 psf (4 kPa)	Decking self-weight 10 psf (0.5 kPa)	Options Clear anodized aluminum guardrails with vertical pickets, integrated LED lighting
Clear width 8' 3" (2.5 m)	Vehicular load 33,000 lb (15,000 kg)	Wind pressure 52 psf (2.48 kPa)	



Design/build of aluminum decking and guardrails over an existing structure



Marinas

- Custom turnkey marinas
- Eye-catching sophistication
- Optimized layout



Photo: Royal Caribbean



For over 20 years, MAADI Group has designed and manufactured marinas throughout North America.

MAADI Group's unparalleled team of engineers designs custom marinas that deliver high performance with little to no maintenance required. Each marina is built to last using sustainable design principles, even for the most complex project requirements.


Briland Club Marina

Harbour Island, Bahamas

Location



Dock system Tri Ocean	Boat sizes 75' to 250' (22 m to 76 m)	Anchoring system Steel piles and H-Beams	Weather conditions Designed for Category 2 hurricane winds of 110 mph (175 km/h), waves up to 3' (1 m)
Fingers Rectangular	Capacity 41 slips		



Customization

- ADA gangways. For more details, see page 266
- Ipe hardwood decking with utility trough covers
- Powder-coated steel piles with stainless steel caps
- LED lighting system




Old Port Cove Marina

North basin, North Palm Beach, Florida, USA

Location



Dock system 245 Series	Boat sizes 30' to 180' (9 m to 55 m)	Anchoring system Steel piles	Weather conditions Designed for Category 2 hurricane winds of 110 mph (175 km/h), waves up to 3' (1 m)
Fingers Rectangular	Capacity 60 slips		



Customization

- Aluminum gangways
- Ipe hardwood decking with aluminum utility trough covers
- Powder-coated steel piles with stainless steel caps
- Aluminum floating wave attenuators. For more details, see page 240



Floating Docks

Durable

Custom design

Versatile





With their ultra-lightweight design, our custom-made aluminum floating docks are a durable, high-performance and environmentally friendly solution for marinas, ferry landings and floating bridges.

Virtually maintenance-free, our marine grade extruded aluminum alloy floating docks are robust and can easily withstand harsh weather and the constant flow of pedestrians and golf carts.

The modular design of the dock systems offers flexibility to accommodate all types of boats, from small pleasure boats to mega yachts.

Aesthetically pleasing and customizable thanks to a variety of options, our designs blend in perfectly with their surroundings and beautify the environment while serving their function.



Photo: Tom Hurst

← City Commons Waterfront Docks, West Palm Beach, Florida, USA

Design and materials

- 100% recyclable aluminum structural components and energy-efficient recycling, resulting in a low carbon footprint.
- Resistant to corrosion from salt water, chemicals and pollution. A permanent film of natural oxide makes the metal less impacted or corroded by the environment.
- Suited to extreme cold, aluminum does not crack at low temperatures.
- Marine grade extruded aluminum alloy construction using 6061-T6, 6005A-T6 and 5083-H321

Maintenance

Virtually maintenance-free and highly cost-effective, compared with steel when total cost of ownership (TCO)¹ is considered.

Vandalism

Very easy to remove graffiti by brushing or sanding bare aluminum, compared to steel that has protective coating.

Warranty

12-year limited warranty on aluminum against material failure, defects and corrosion.





¹ maadigroup.com/en/news/total-cost-of-ownership-aluminum-steel




Our Systems

Our modular floating dock systems are easily adaptable and configurable to recreational marinas and watercraft.

System characteristics	Lakeshore	Great Lakes	Tri Ocean
	 Small pleasure craft and recreational boats	 Medium-sized pleasure yachts	 Large vessels and mega yachts
Boat dimensions	From 20' to 40' (From 6.1 to 12.2 m)	From 20' to 80' (From 6.1 to 24.4 m)	From 60' to 200' (From 18.3 to 61 m)
Dock width	From 4' to 8' (From 1.2 m to 2.4 m)	From 4' to 11' (From 1.2 m to 3.4 m)	From 4' to 16' (From 1.2 m to 4.9 m)
Dock length	Up to 42' (12.8 m)	Up to 42' (12.8 m)	Up to 42' (12.8 m)
Standard freeboard	From 10" to 20" (From 254 to 508 mm)	From 14" to 24" (From 356 to 610 mm)	From 16" to 36" (From 406 to 914 mm)
Reserve buoyancy	From 20 to 30 psf (From 0.96 to 1.44 kPa)	From 30 to 50 psf (From 1.44 to 2.39 kPa)	From 35 to 80 psf (From 1.68 to 3.83 kPa)
Vertical load-bearing capacity	Up to 100 psf (4.8 kPa)	Up to 150 psf (7.2 kPa)	Up to 200 psf (9.6 kPa)
Horizontal load-bearing capacity	246 psf – 150 lb/ft (12 kN/m² – 223 kg/m)	246 psf – 150 lb/ft (12 kN/m² – 223 kg/m)	1,337 psf – 1,250 lb/ft (64 kN/m² – 1,860 kg/m)
Impact resistance	22-ton boat, 1.6 fps (0.5 m/s) at 10° angle absorbed over 3' (900 mm) of dock length	60-ton boat, 1.6 fps (0.5 m/s) at 10° angle absorbed over 3' (900 mm) of dock length	240-ton boat, 1.6 fps (0.5 m/s) at 10° angle absorbed over 3' (900 mm) of dock length
Stability	Maximum tilt angle: 10° with live load on one side of dock		
Weather conditions	Severe storms Winds of 74 mph (120 km/h)	Category 2 hurricane with winds of 110 mph (175 km/h)	
Cleats	12" – up to 3,200 lb (305 mm – up to 14 kN)		12" – up to 3,200 lb (305 mm – up to 14 kN) 20" – up to 11,400 lb (508 mm – up to 51 kN)
Bollards	Single bitt: 15" – up to 4,250 lb (381 mm – up to 19 kN)		Double bitt: 15"– up to 14,400 lb (381 mm – up to 64 kN)
Optional utility trough covers	9" (229 mm)	Lateral: 9" (229 mm) Central: 16" (406 mm)	Lateral: 12" (305 mm) Central: 16" (406 mm)
Multifunction track system	Single rail	Single rail	Double rail


Main Docks

Custom lengths
and widths
available

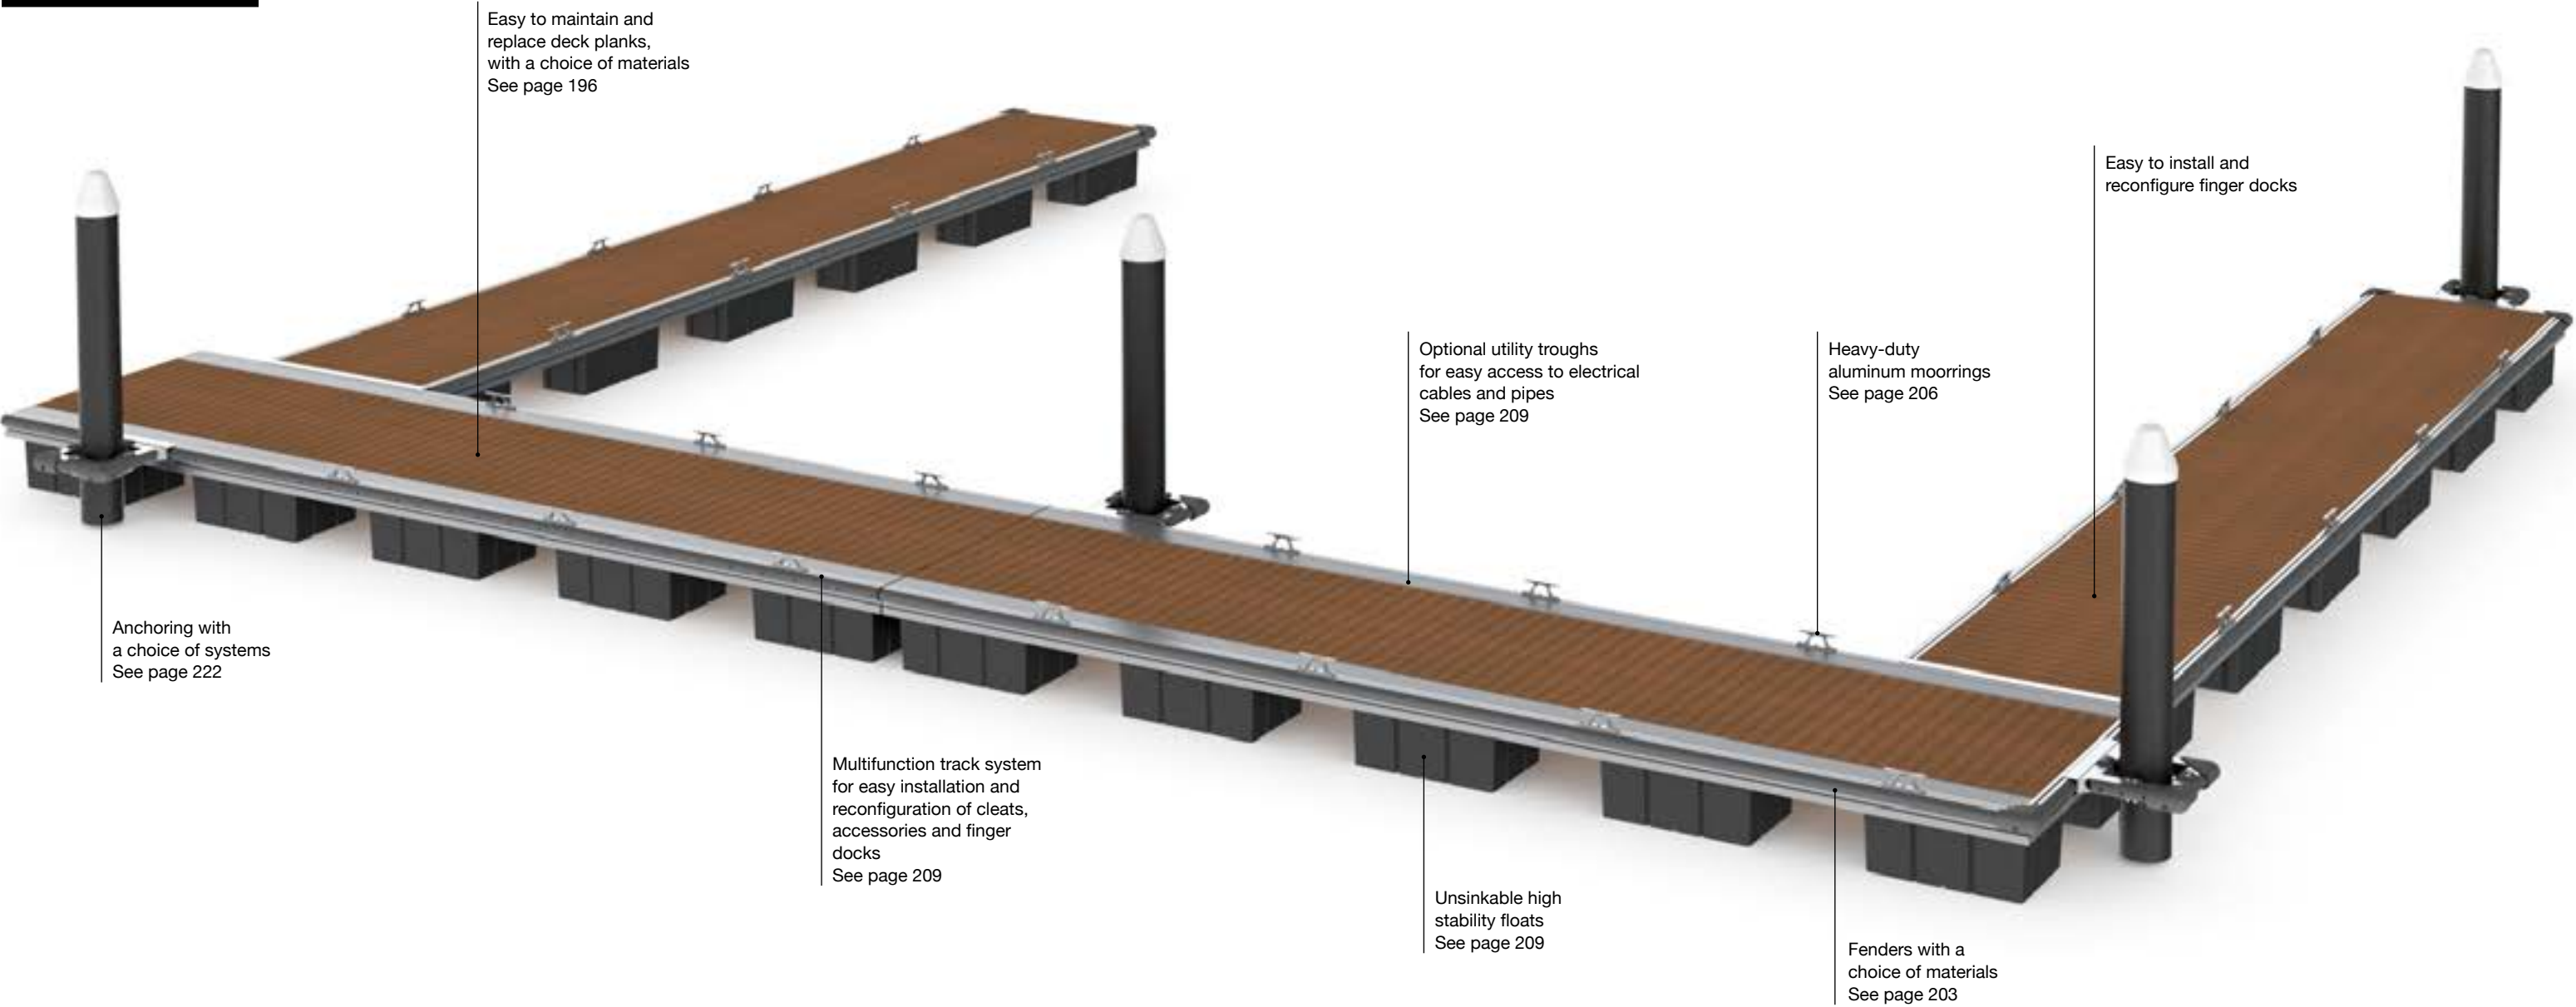

Finger Docks

Custom lengths
and widths
available

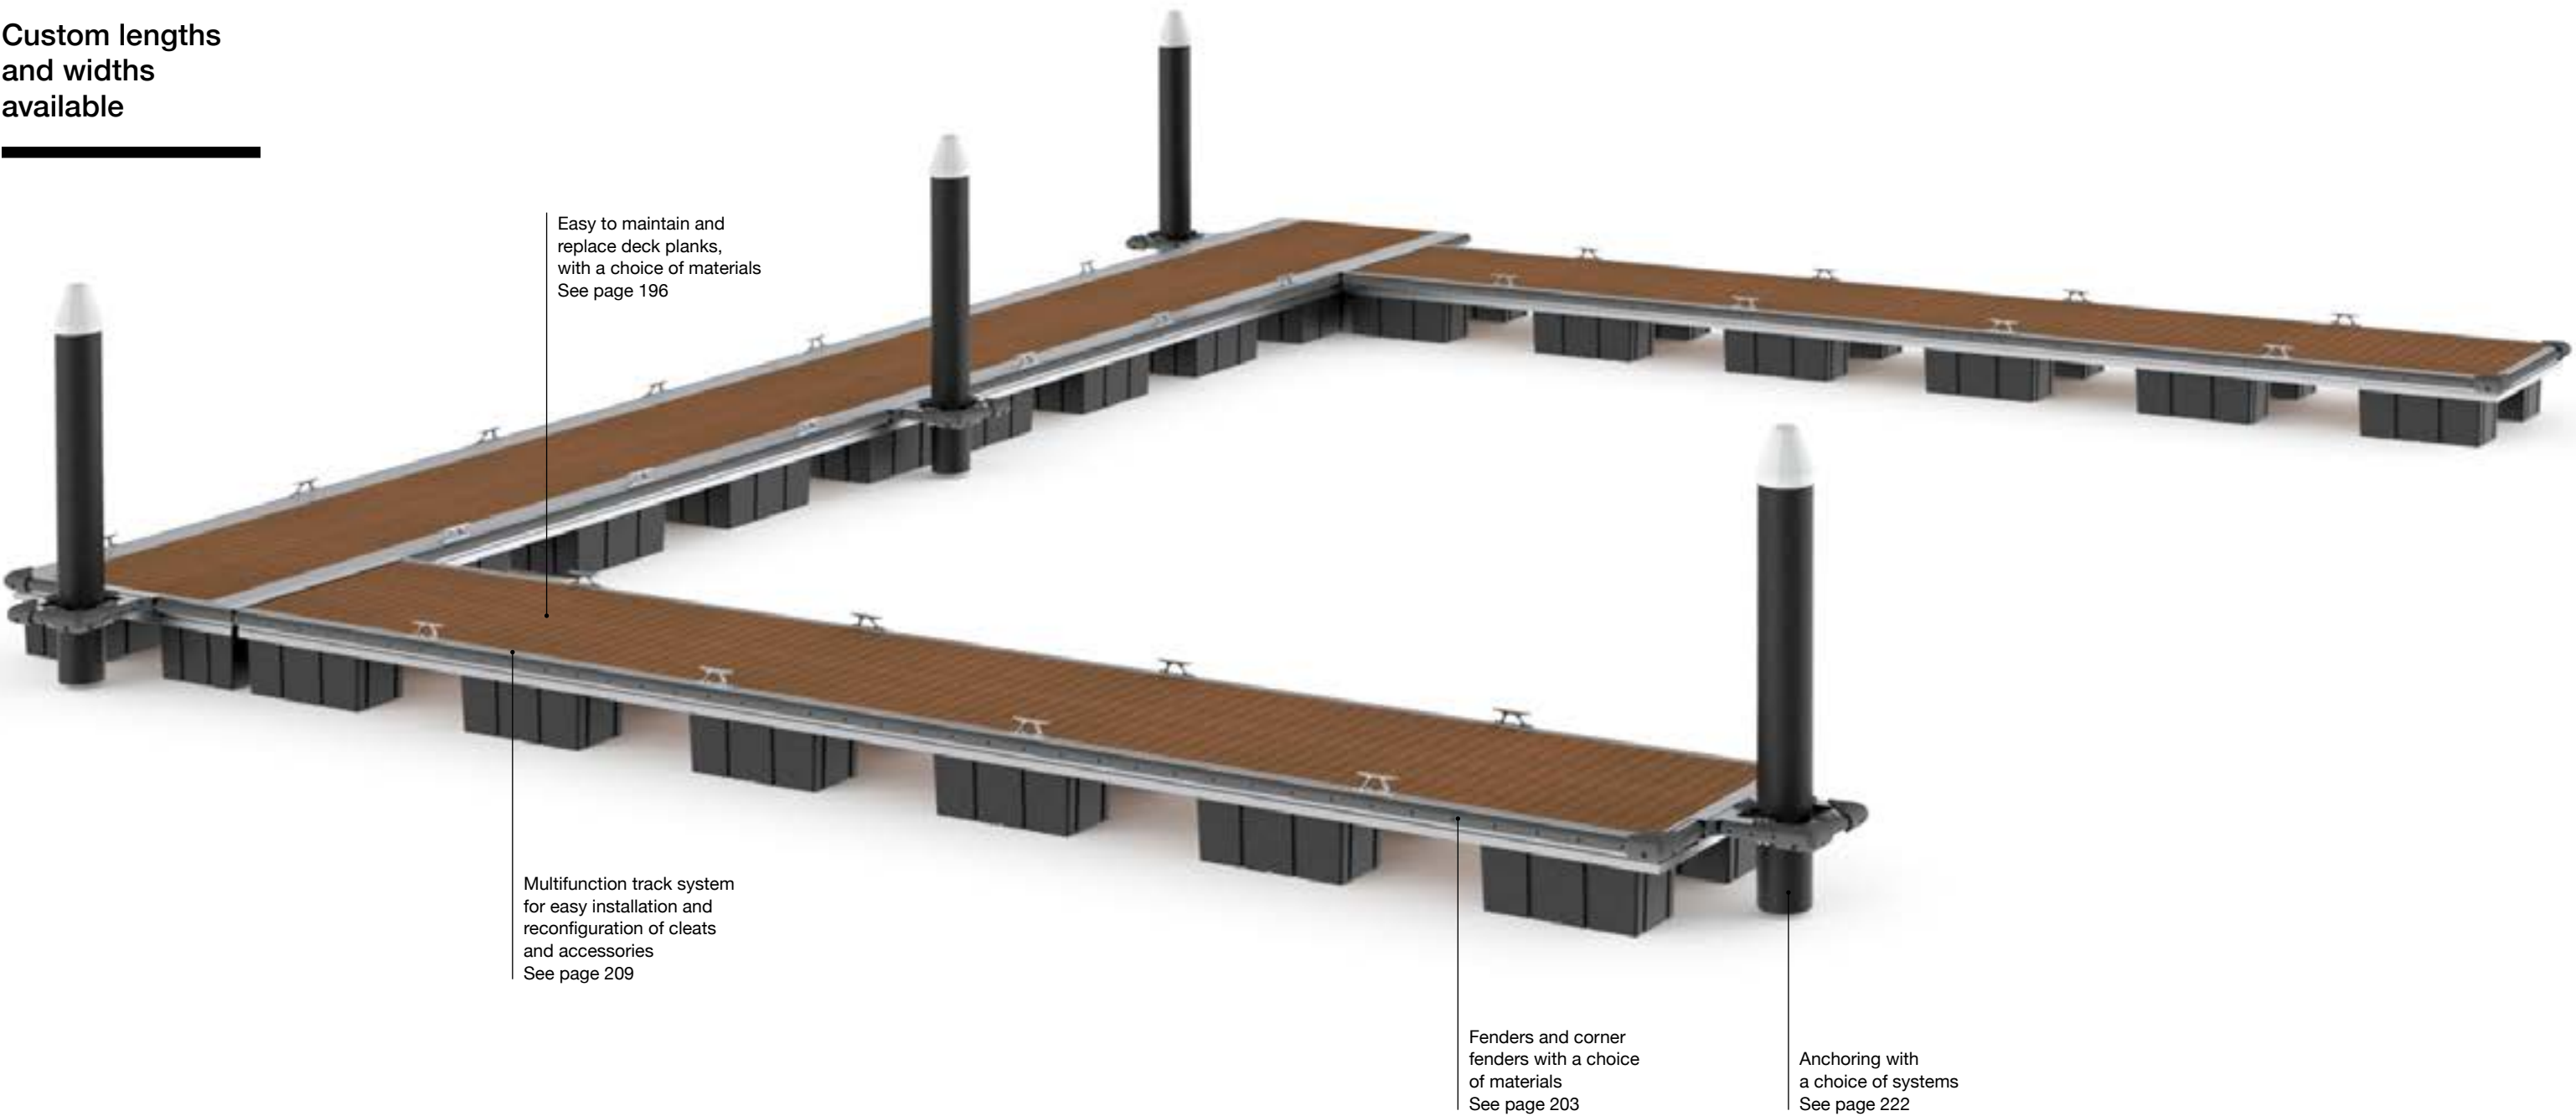

Multifunction Track System

Specifications

- Design**
- Heavy-duty built-in single or double rails
 - Enables fast and easy attachment of dockside accessories such as cleats, bollards and safety ladders, as well as finger docks and pile guides
 - Permits continuous reconfiguration depending on needs

- Material**
- Marine grade 6061-T6, 6005A-T6, 5083-H321 aluminum alloy extrusions

Lakeshore and Great Lakes systems



Single rail

Tri Ocean system



Double rail

Universal Connectors

Specifications

- Design**
- Quickly connect the main dock modules as well as the finger docks
 - Noise-free, strong and flexible
 - Wave movements absorbed through connectors, delivering stable dock performance in rough water conditions

- Material**
- Elastomer or UV-stabilized ethylene propylene diene monomer (EPDM) reinforced with high resistance aluminum rings

- Tensile strength**
- 19.4 kips (86.48 kN)
 - Distortion: 1.1" (27.8 mm)

- Compressive strength**
- 19.7 kips (87.55 kN)
 - Distortion: 0.75" (19 mm)

- Shear strength**
- 19.8 kips (87.95 kN)
 - Distortion: 3.1" (79.8 mm)



Unsinkable Floats

We offer unsinkable rotomolded polyethylene floats with great stability, withstanding shocks and harsh conditions.

Specifications

Design

- Resistant to salt water, hydrocarbons, chemicals and pollution
- Resistant to carbon black cracking, low temperature impacts and punctures
- Pressure-release valve to maintain float integrity when temperature varies
- Spin weld plug available for completely submerged floats
- Fastened to the side extrusion with stainless steel hardware
- Complies with all U.S. Army Corps of Engineers and EPA requirements

Materials

- Seamless UV-stabilized polyethylene shell – nominal thickness of 0.15" (3.81 mm)
- Filled with EPS foam – minimum density of 1 lb/ft³ (16 kg/m³) and meets requirements of the Hunt absorption test

Warranty


- 10-year limited warranty



Float with or without flange

Lakeshore system


Float without flange

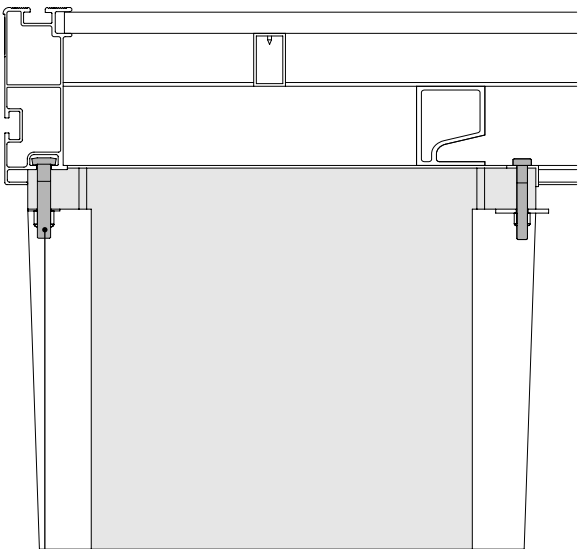


Fastened with stainless steel hardware

Great Lakes and Tri Ocean systems

Float with flange

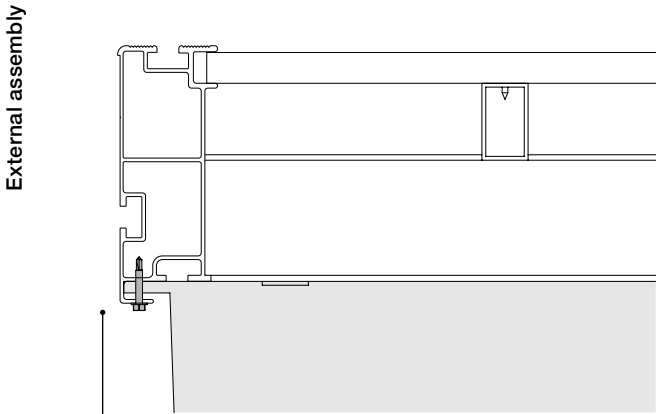

Fastened with stainless steel hardware

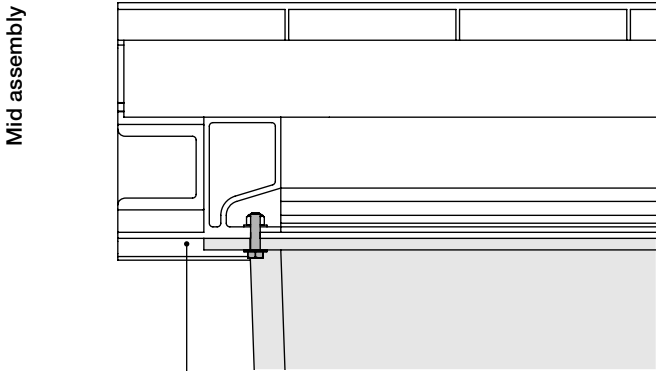


Heavy-duty float-flange attachment at side extrusion

Customization



Decking Materials

Choose decking material based on how your dock will be used. MAADI Group engineers can recommend the best decking for your needs in terms of application, safety, and maintenance. Here are our most popular and durable options.

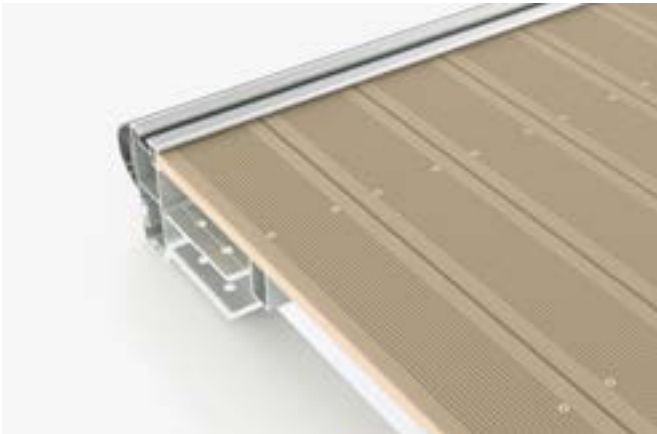

Ipe hardwood

Specifications

- Naturally very resistant to decay, rot and insect attack
- Minimum 40-year lifespan depending on use
- Low maintenance, no treating or sealing required for durability (treating may be required to keep the original color)
- Straight grain with fine to medium texture
- Economical over life of the structure
- Average density of 69 lb/ft³ (1,100 kg/m³)
- Fastened with stainless steel screws

Dimensions

- S4S outside corner
- Width varies between 5" and 7 3/8" (127 mm and 188 mm)
- Thickness varies between 1" and 1 1/2" (25 mm et 40 mm) depending on loads and applications

Option

- Other hardwood options such as ribbed cumaru are available upon request

Composite

Specifications

- Designed to resist rot, warping and fading
- Minimum 25-year lifespan depending on use
- Anti-slip ribbed surface
- Low maintenance, no treating or sealing required for durability
- Economical over life of the structure
- Density of 75 lb/ft³ (1,195 kg/m³)
- Fastened with stainless steel screws

Materials

- A blend of wood flour and high-density polyethylene

Dimensions

- S4S outside corner
- 7/8" x 5 1/2" (22 mm x 140 mm)

Color

- Sand

Utility Troughs



With its flush design, the trough covers conceal and protect electrical cables, plumbing and fire extinguishing pipes, offering easy access for maintenance and reconfiguration.

Lakeshore system

Without cover



With lateral cover – 9" (229 mm)

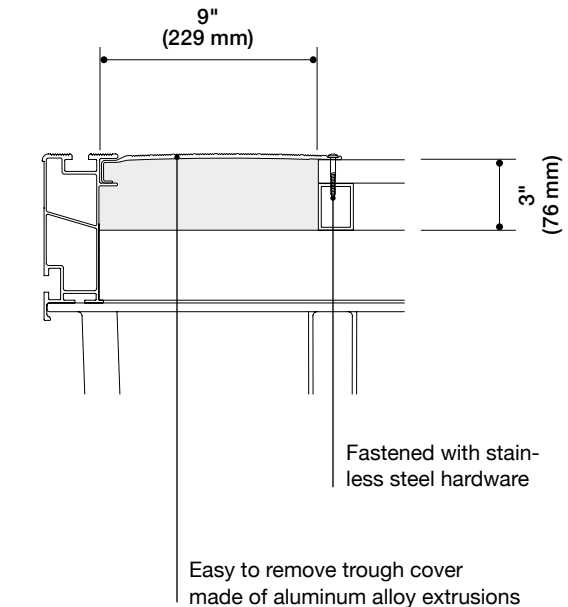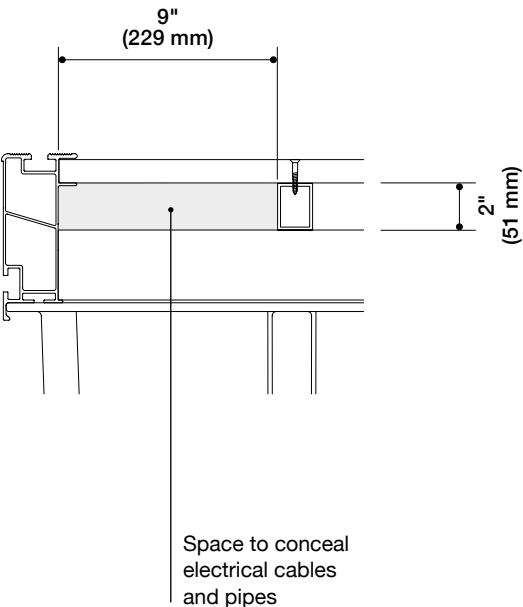


Utility Troughs

Great Lakes system


Without cover



With lateral cover – 9" (229 mm)

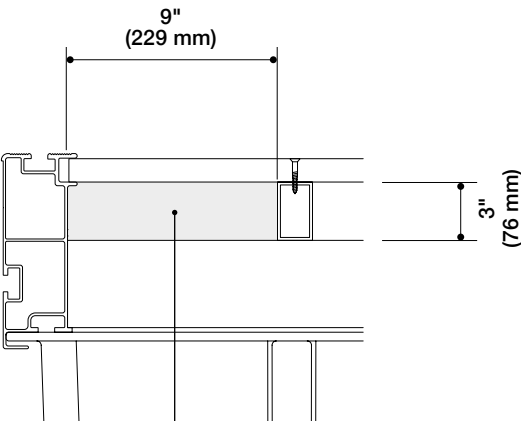

Space to conceal electrical cables and pipes

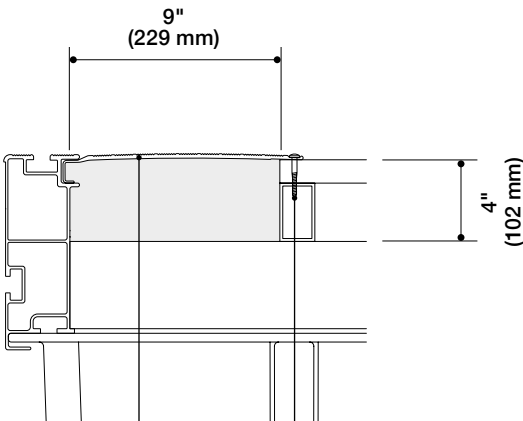


Fastened with stainless steel hardware

Easy to remove trough cover made of aluminum alloy extrusions

Great Lakes system

With central cover – 16" (406 mm)

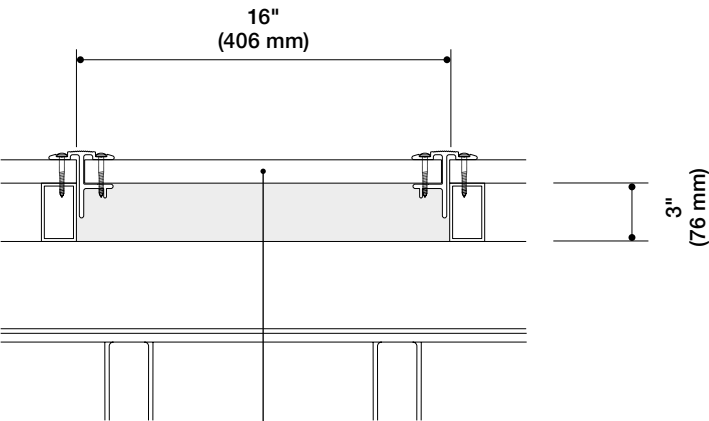

Easy to remove trough cover made of ipe hardwood or composite


Utility Troughs

Tri Ocean system


Without cover



With lateral cover – 9" (229 mm)

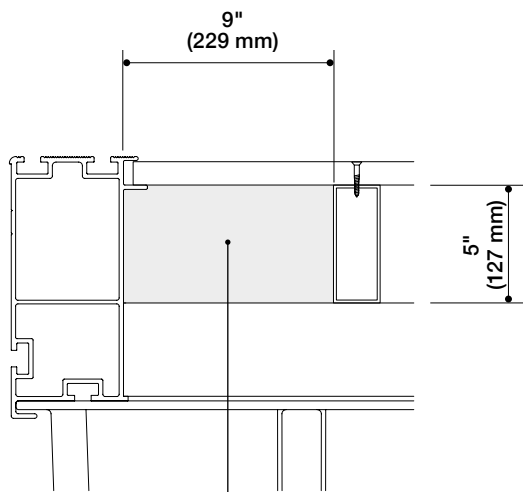

Space to conceal electrical cables and pipes

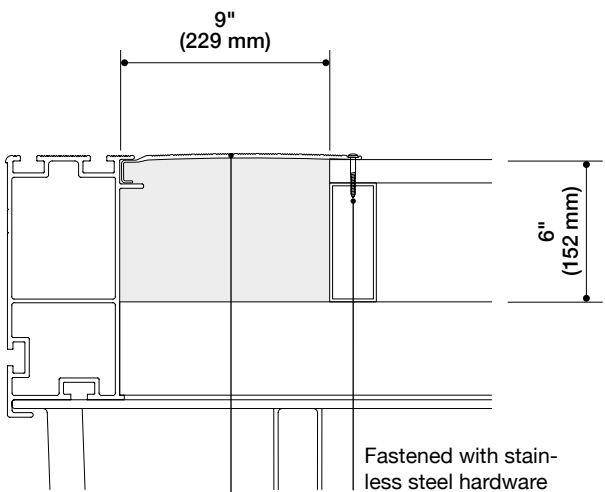


Fastened with stainless steel hardware


Easy to remove trough cover made of aluminum alloy extrusions

Tri Ocean system

With lateral cover – 12" (305 mm)

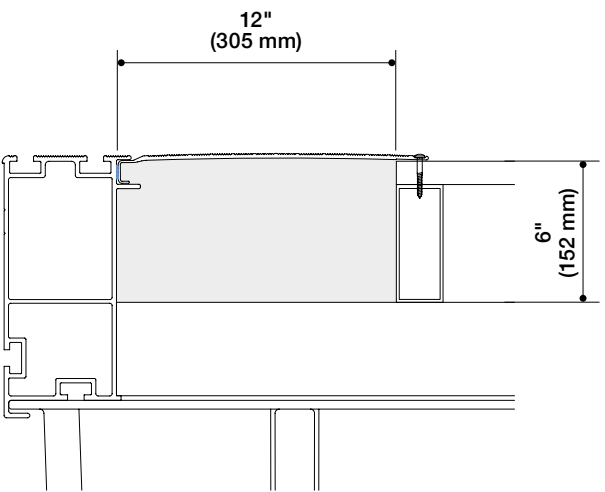

With central cover – 16" (406 mm)

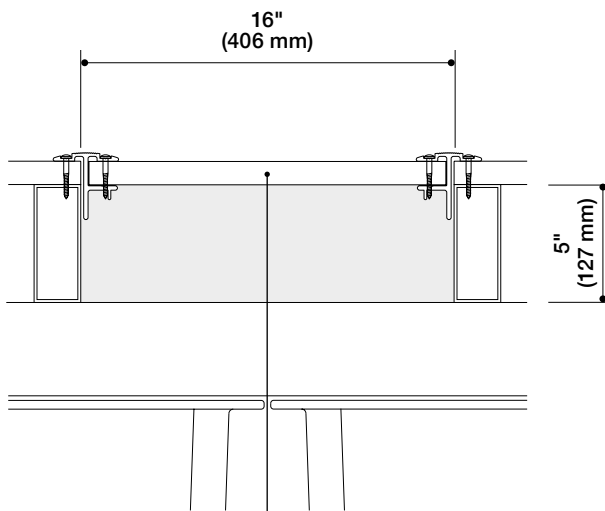

Easy to remove trough cover made of ipe hardwood or composite



Fenders

Our all-purpose non-marking fenders offer maximum boat hull protection. All fenders are attached to the dock with stainless steel hardware.

Ipe hardwood

Specifications

- Naturally very resistant to decay, rot and insect attack
- Minimum 40-year lifespan depending on use
- Low maintenance, no treating or sealing required for durability (treating may be required to keep the original color)
- Economical over life of the structure
- Average density of 69 lb/ft³ (1,100 kg/m³)
- Can be combined with corner fenders for optimal protection

Dock systems

- Half-size: Lakeshore and Great Lakes
- Full-size: Tri Ocean

Material

- Ipe

Dimensions

Available in two sizes:

- Half-size: 2 1/2" x 1" (65 mm x 25 mm)
- Full-size: 5" x 1" (135 mm x 25 mm)

Options

- Other hardwood options such as cumaru are available upon request
- Composite fenders are also available upon request

Lakeshore and Great Lakes systems



Half-size

Tri Ocean system



Full-size

Fenders

EPDM rubber

Specifications
- Usually used for larger vessels
Dock systems
- DD4: for all systems
- DD6: Tri Ocean
Material
- UV-stabilized ethylene-propylene-diene-monomer (EPDM)
Color
- Grey

All systems



DD4

Tri Ocean system



DD6

PVC



Specifications
- Can be combined with corner fenders for optimal protection
Dock systems
- For all systems
Material
- UV-stabilized polyvinyl chloride (PVC)
Color
- Grey
Dimensions
- 4" x 2" (102 mm x 55 mm)

HDPE corners



Specifications
- Added corner dock protection
Dock systems
- For all systems
- Can be used with half-size ipe hardwood and composite, and PVC fenders
Material
- UV-stabilized high density polyethylene (HDPE)
Color
- Grey
Dimensions
- 10 1/2" x 10 1/2" x 5 5/8" (269 mm x 269 mm x 144 mm)

Moorings

MAADI Group’s aluminum cleats and bollards combine form, function and strength. Resistant to corrosion from salt water, our moorings are easy to reconfigure on a multifunction track system.

Cleats – 12" (305 mm)



Dock systems
- For all systems

Capacity
- Up to 3,200 lb (14 kN)

Material
- Aluminum alloy A356

Fastener
- Three stainless steel T-bolts

Dimensions
- Length: 12" (305 mm)
- Width: 2 1/2" (64 mm)
- Height: 4 1/2" (114 mm)

Cleats – 20" (508 mm)



Dock system
- Tri Ocean

Capacity
- Up to 11,400 lb (51 kN)

Material
- Aluminum alloy A356

Fastener
- Four stainless steel T-bolts

Dimensions
- Length: 20" (508 mm)
- Width: 5 3/4" (146 mm)
- Height: 6" (152 mm)

Single bitt bollards – 15" (381 mm)



Dock systems
- Lakeshore and Great Lakes

Capacity
- Up to 4,250 lb (19 kN)

Material
- Aluminum alloy A356

Fastener
- Four stainless steel T-bolts

Dimensions
- Length: 15" (381 mm)
- Width: 5 1/2" (140 mm)
- Height: 5 3/8" (137 mm)

Double bitt bollards – 15" (381 mm)



Dock system
- Tri Ocean

Capacity
- Up to 14,400 lb (64 kN)

Material
- Aluminum alloy A356

Fastener
- Six stainless steel T-bolts

Dimensions
- Length: 15" (381 mm)
- Width: 6" (152 mm)
- Height: 6" (152 mm)



Accessories

MAADI Group pays particular attention to the aesthetics and safety aspect of its structures. All our accessories comply with the strictest American and Canadian standards and codes.



Comfort and aesthetics

- Guardrails with a choice of styles**
- Midrails
 - Personalize your guardrails with your own design

- Other options**
- Custom benches
 - Parasols, canopies and awnings
 - LED lighting system

Safety and services

- Options**
- We offer a full range of high-quality accessories for all your needs:
- Ladders
 - Fire hydrants
 - Security accessories
 - Power pedestals
 - Wastewater pump-out system
 - Fuel pumps

Projects



Photo: Royal Caribbean

CocoCay Floating Docks

Berry Islands, Bahamas

Location



Dock system 214 Series	Boat sizes N/A	Anchoring system Steel piles	Weather conditions Designed for Category 2 hurricane winds of 110 mph (175 km/h), waves up to 3' (1 m)
Fingers N/A	Capacity 20 floating cabanas		



Customization

- Side extrusions covered with ipe hardwood
- Ipe hardwood decking
- Steel piles covered with ipe hardwood



City Commons Waterfront Docks


West Palm Beach, Florida, USA

Location



Photo: Tom Hurst

Dock type 245 Series	Boat sizes Up to 35' (11 m)	Anchoring system Steel piles	Weather conditions Designed for Category 2 hurricane winds of 110 mph (175 km/h), waves up to 3' (1 m)
Fingers N/A	Capacity 50 slips		



Customization

- Fixed access platforms and ADA gangways. For more details, see page 268.
- Ribbed Cumaru wood decking
- Powder-coated steel piles with stainless steel caps
- Custom benches and removable parasols
- LED lighting system
- Oyster beds
- Submerged planters for mangroves
- Automatic watering system



Bartram’s Garden Dock

Philadelphia, Pennsylvania, United States

Location



Dock system Lakeshore	Boat type Kayaks	Anchoring system H-beam, H-beam guide anchored on concrete wall	Weather conditions Designed for winds up to 115 mph (185 km/h), current up to 6.7 ppm
Fingers N/A	Slips N/A		



Customization

- Glacier style gangway, ipe hardwood decking and kick plates, aluminum guardrails with midrails
- Composite decking
- Kayak launching ramp with polypropylene decking and roller system



Floating Bridges

Customized for every environment



Countries such as the U.S., Guyana and Norway are constructing floating bridges because they're often better suited to local climates and land features. Pontoons allow the structure to move with the water rather than stay in one place and risk damage. Bracing components and anti-skid decking units add structural strength and increase safety.

Engineered using heavy-duty aluminum, the pontoons that we custom design and manufacture bend, shift and heave, preventing damage such as cracks to form and cause water leakage. Floating bridges take up less space than traditional bridges so visitors and residents can still take in a location's natural features while maintaining a high level of safety and security. They are very well suited to extreme cold, and our pontoons contain watertight compartments to prevent water coming in.

MAADI Group offers a variety of custom design options, such as anti-skid decking, aluminum guardrails with a choice of styles and finishes, handrails, kick plates, LED lighting system and wave attenuators.

MAADI Group floating bridges meet the highest quality standards for stability and corrosion resistance.



Anchoring Systems



Anchoring Systems

Our engineers have earned international recognition for their one-of-a-kind expertise in planning full anchoring system layouts. Through an in-depth analysis of all the project parameters, they’re able to offer you the perfect solution for your needs.



MAADI Group engineers can recommend the best anchoring system for you in terms of application, safety, and maintenance. All components and hardware are resistant to salt-water corrosion.


	Deadman More details, see page 225			Piles More details, see page 227	H-Beam More details, see page 229	Push-Arm More details, see page 231
	Concrete block	Helical anchor	Manta Ray®			
Tides						
Small	■	■	■	■	■	■
Large	■	■	■	■	■	
Water depth						
Shallow Up to 20' (6.1 m)	■	■	■	■	■	■
Deep Up to 60' (18 m)	■	■	■		■	■
Soil						
Soft	■		■	■	■	■
Hard	■	■		■	■	■
Settings						
Bulkhead/Seawall					■	■
Shoreline						■



Deadman

This method of anchoring is the most common and generally used in deep waters.

Specifications	Connector
System - Floating docks are moored to the sea bed with anchors and to the shore with mooring lines - No adjustment required after installation Anchor options - Concrete block - Helical anchor - Plow anchor Mooring options - Hot-dip galvanised chain and shackle - Cable with rubber hawser	

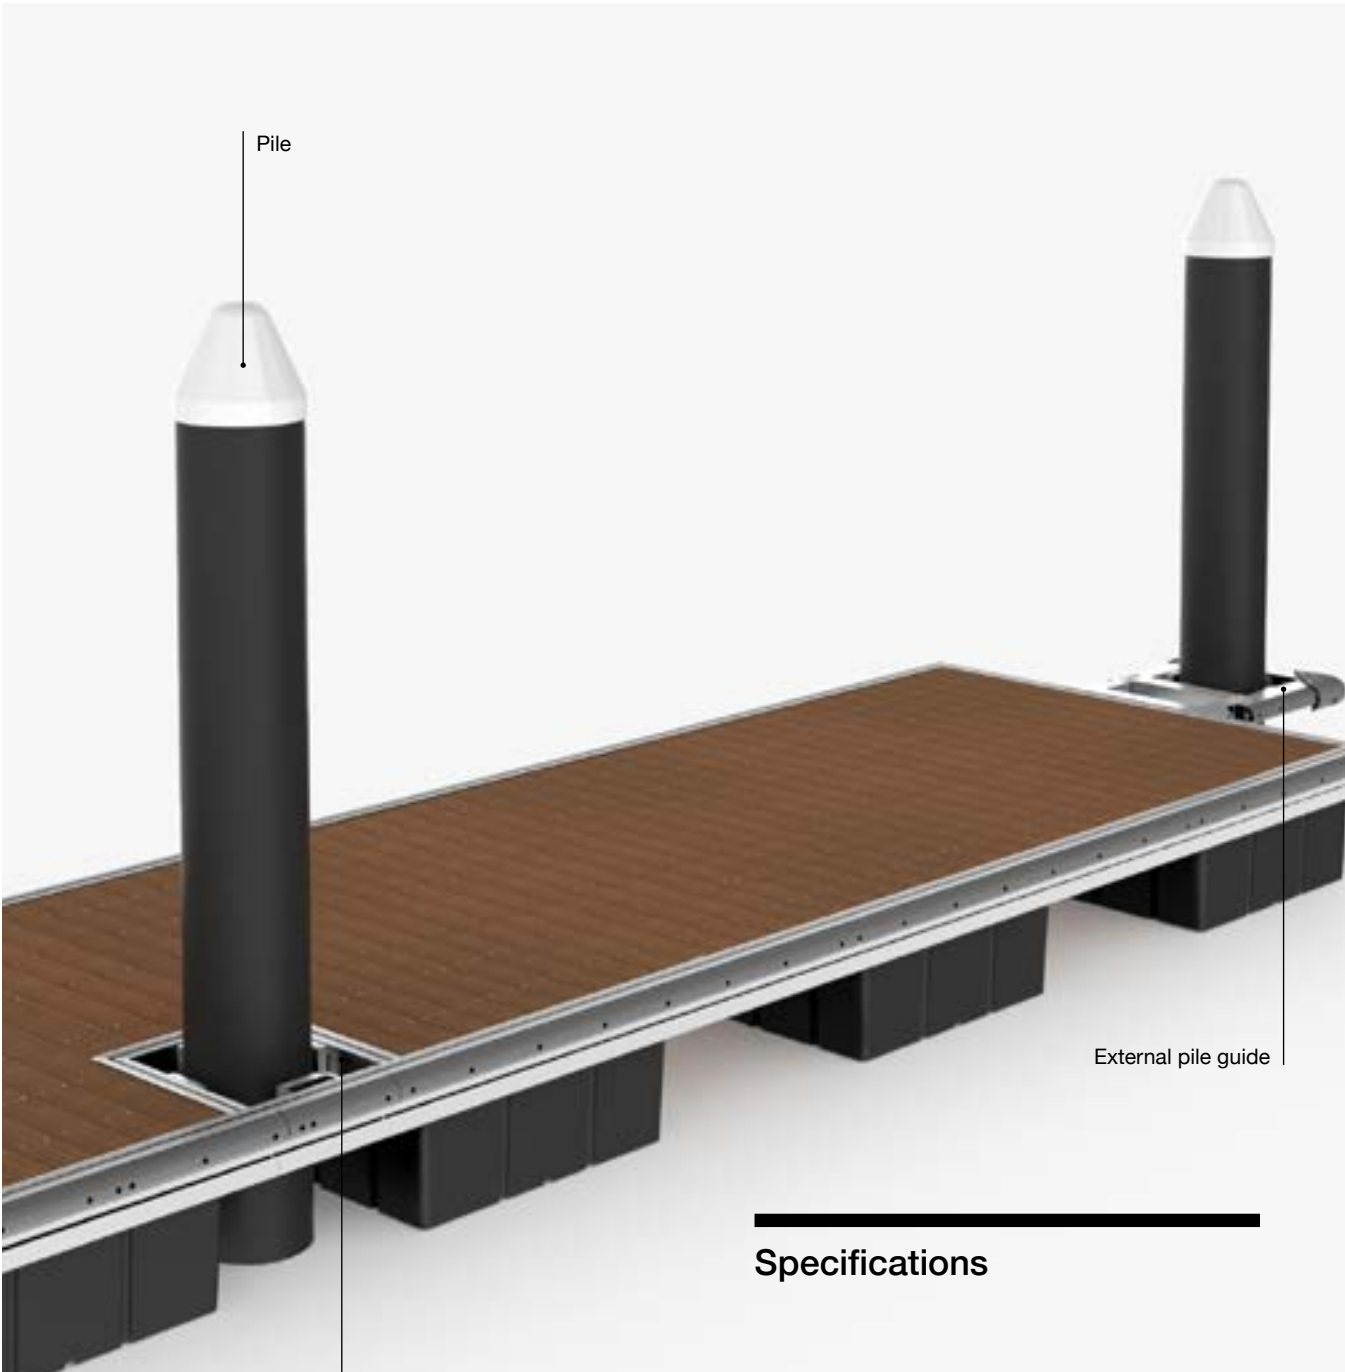

Pile

External pile guide

Internal pile guide

Specifications

System

- Floating docks are anchored to the piles with external or internal aluminum guide piles
- Not suitable for sites subject to thick ice
- No adjustment required after installation
- Low maintenance


Options

- Various types of piles are available: steel, concrete or wood


Piles

Pile anchoring is a long-lasting mooring method and is usually used in shallow waters.


Great Lakes system

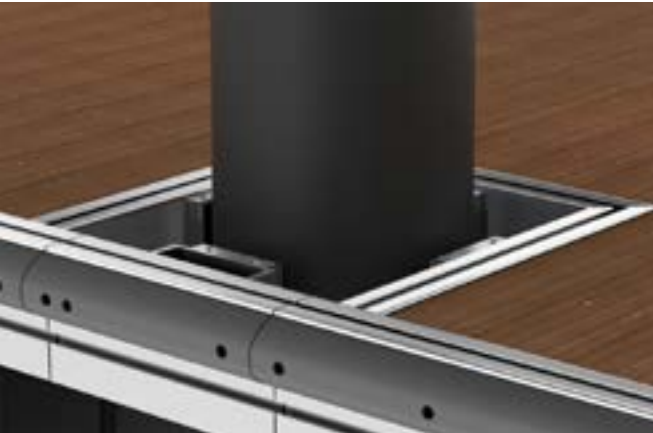


Tri Ocean system

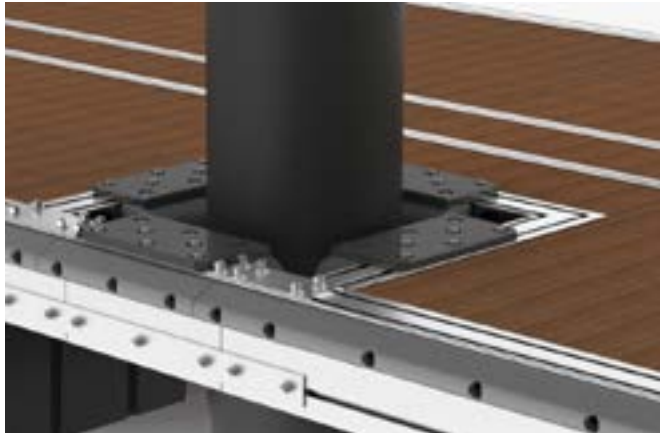

Internal

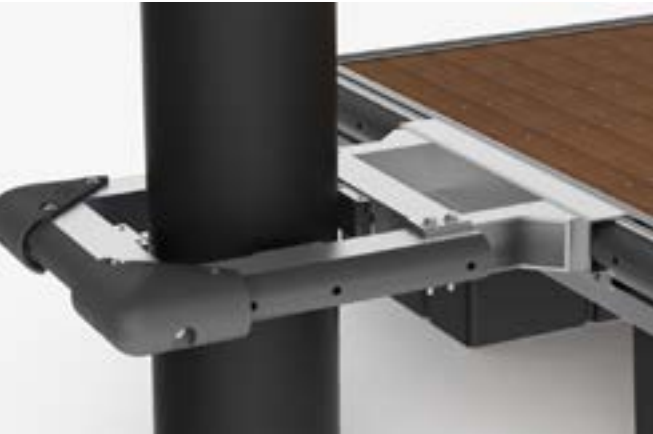

External

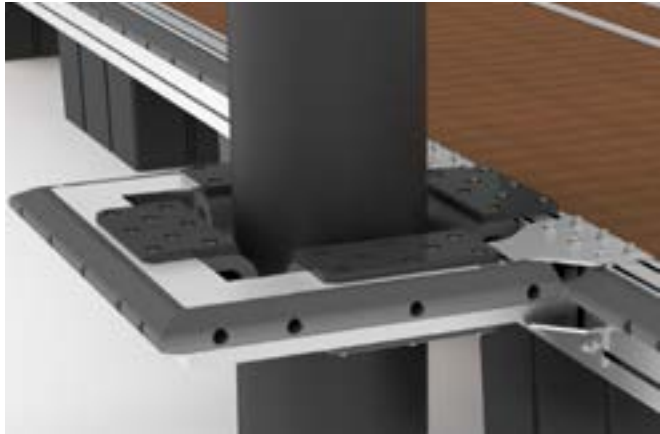



H-Beam


Can be used for floating docks anchored along a seawall or bulkhead.

Specifications

- System**
- Economical mooring solution compared to piles
 - Ideal when water level variations are large
 - Easy to install
 - No adjustment required after installation
 - Low maintenance

H-beam guide



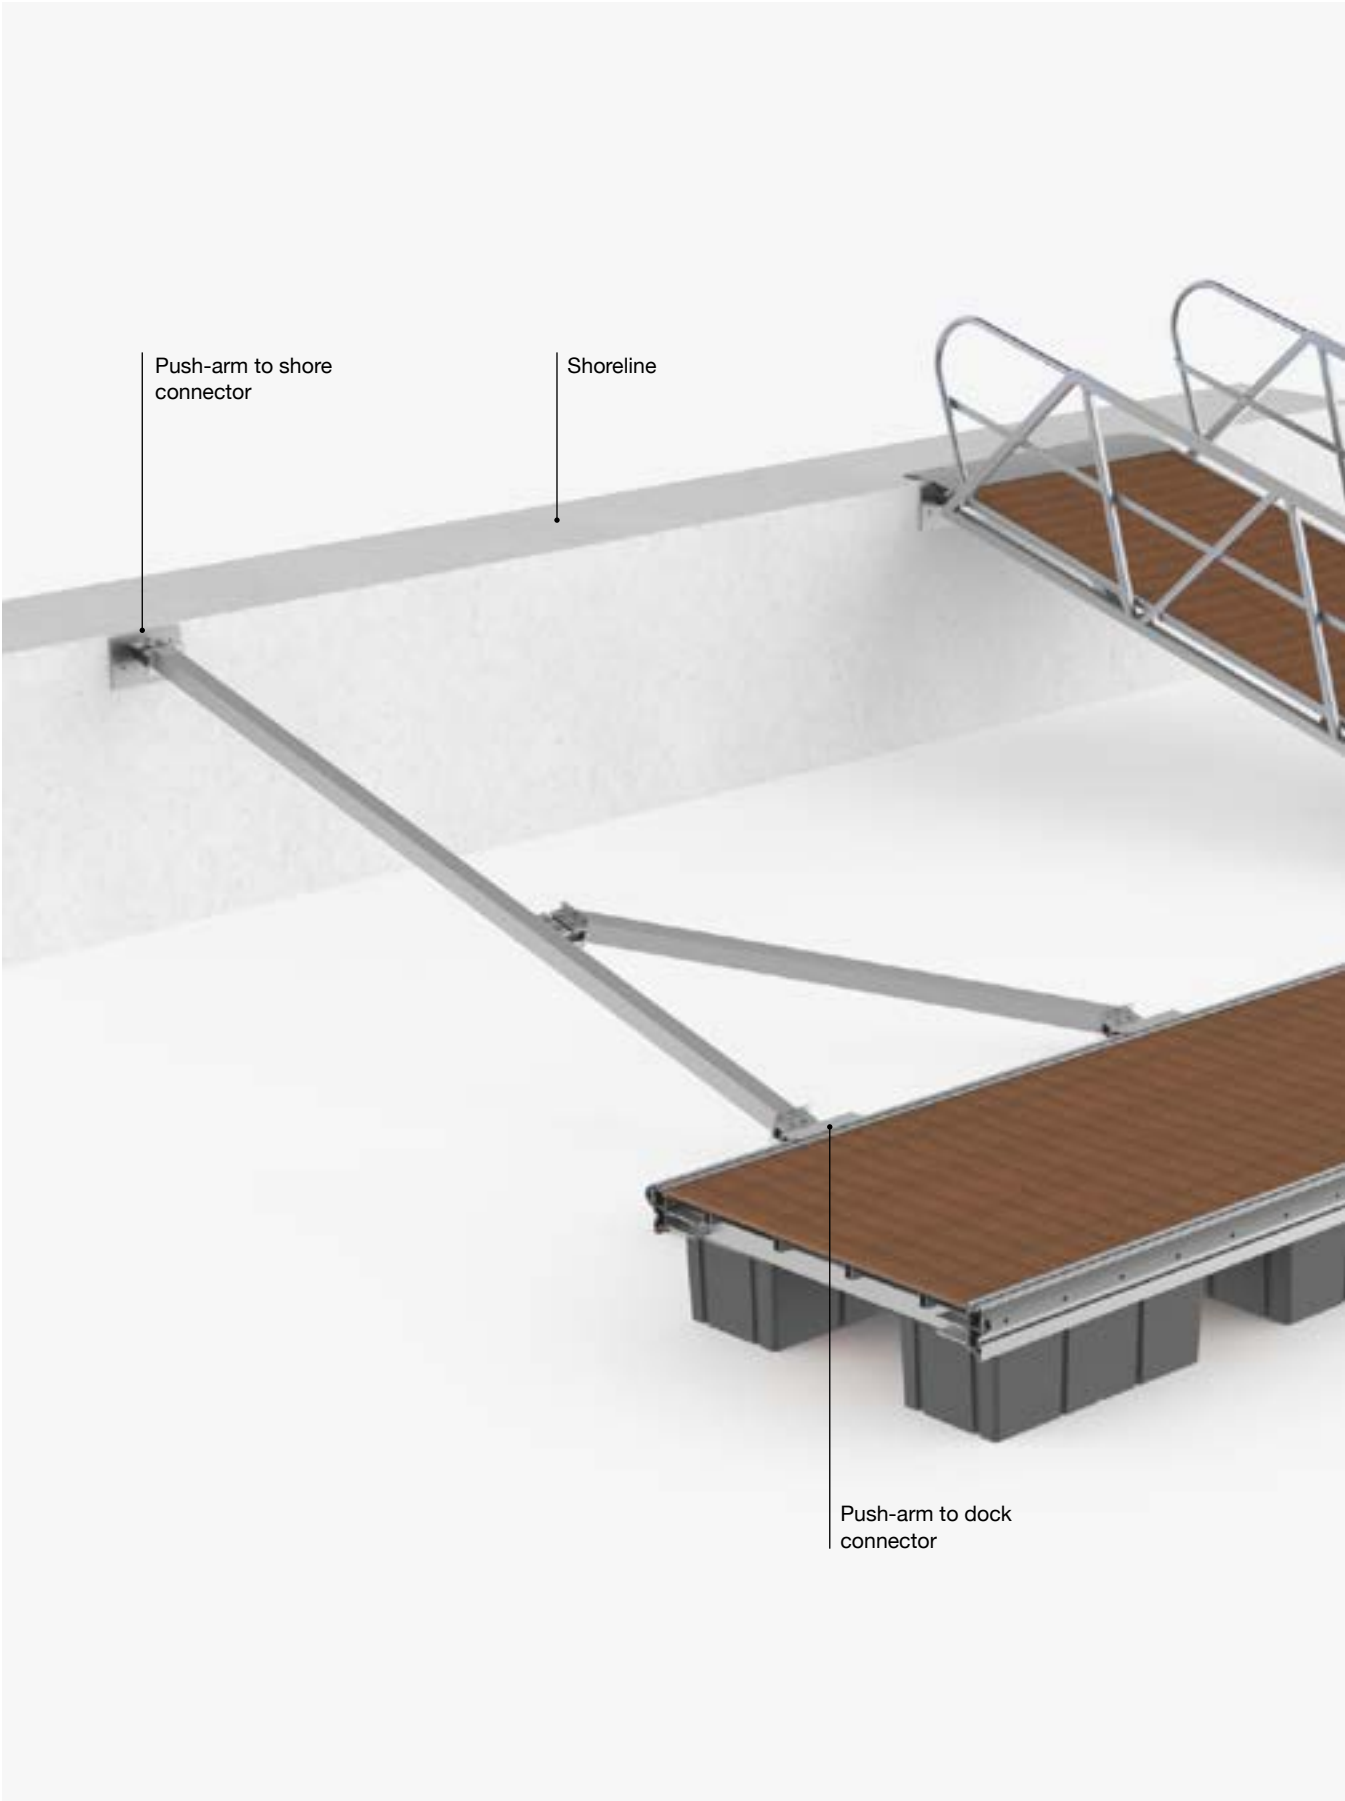

Push-Arm

Used for floating docks along the shoreline, particularly when the shoreline is uneven.


Specifications

- System**
- Push-arm mooring method is used where water level variations are small
 - All components and hardware are resistant to corrosion from salt water
 - No adjustment required after installation
 - Low maintenance

Connectors



Dock

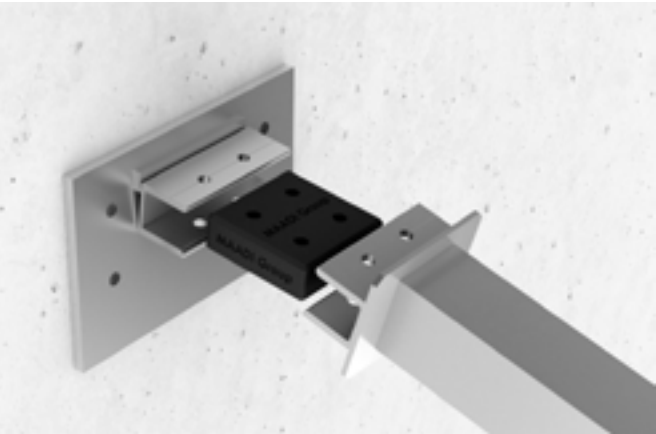

Shore

Ferry Landings

Turnkey ferry landings

Strong and durable

Cost-effective

Tailored design





Whether they’re built for mooring shuttles, ferries or water taxis, our aluminum landings are designed to ensure passenger safety with minimal maintenance.

MAADI Group engineers optimize design and manufacturing to achieve superior quality structures that withstand corrosion, pollution, harsh climates and high daily use.

Our structures are tailored to your specific needs and are fully customizable with a variety of options.



← International Cruise Ship Ferry Landing La Baie, Quebec





Location

← Ferry landing at Mingan Archipelago National Park Reserve, Havre-Saint-Pierre, Quebec, Canada

Floating Wave Attenuators



Innovative

Tough

Better for the environment



Wave attenuators designed for climate change

Hurricanes, typhoons and storms have all generally become more severe and unpredictable in recent years. With the impacts of climate change already being felt around the world, it's more important than ever to develop robust solutions that respect the environment and withstand the forces of nature and accelerated erosion.


Faced with the challenge of protecting shorelines from damaging wind- and ship-generated waves, MAADI Group engineers have created an innovative design that uses sustainable materials: the aluminum floating wave attenuator.

Design innovation

Whether for a new construction or a renovation project, aluminum floating wave attenuators are an attractive solution that provides the ultimate in durability and corrosion resistance.

We design and produce high-performance floating wave attenuators. By using piles instead of chains, we're able to increase the efficiency of wave attenuators and create additional boat slips and dockage areas.

Our specialized maritime structures integrate the strength of aluminum alloys 6061-T6, 6005A-T6 and 5083-H321 modules with a submerged steel or marine-grade aluminum frame and vinyl panels. Aluminum's low modulus of elasticity, critical energy absorption properties, resilience, and corrosion resistance protect valuable coastline and vessels without compromising the environment and beauty of the waterfront.

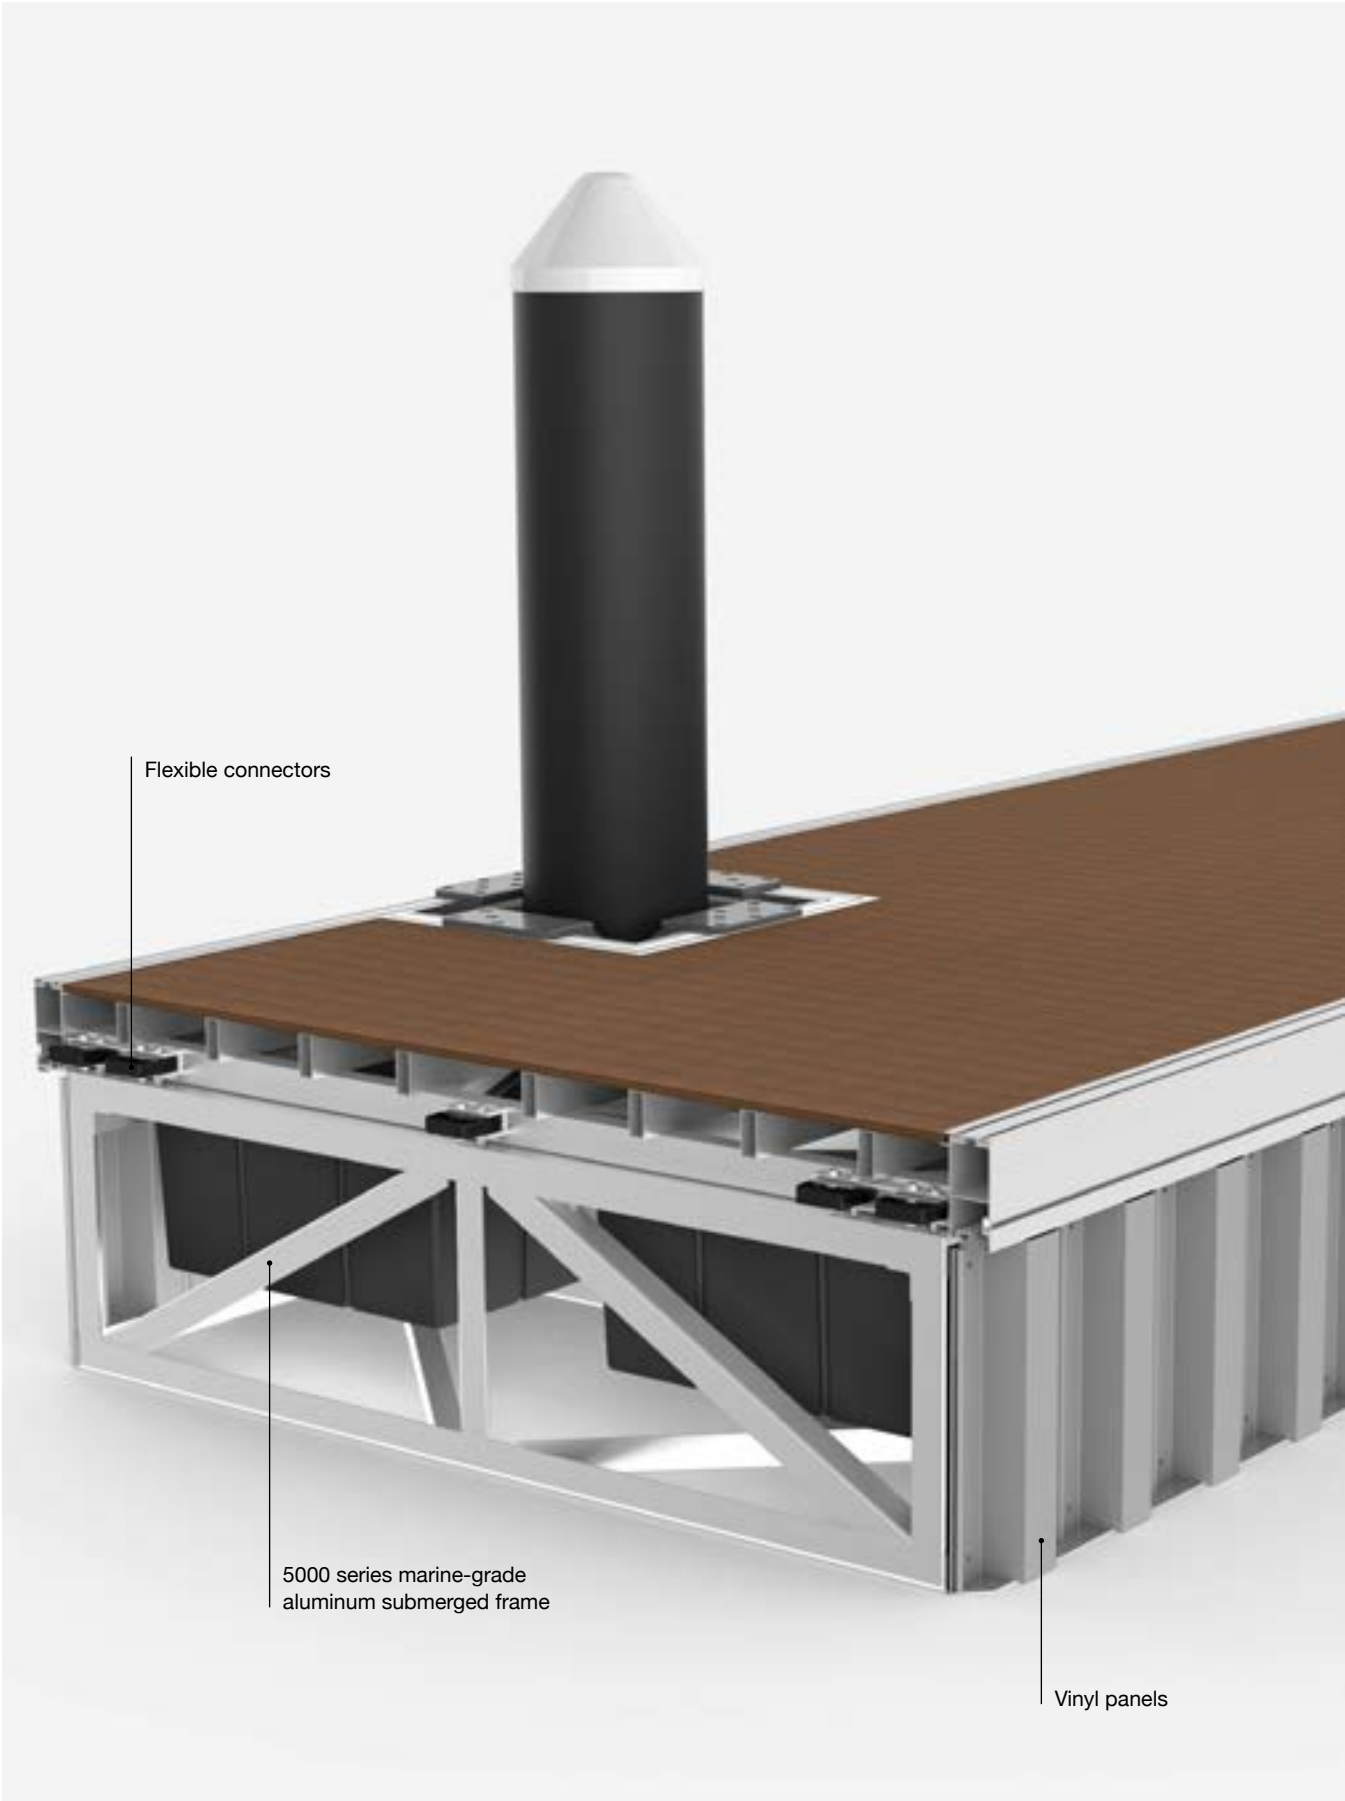

Flexible connectors

5000 series marine-grade
aluminum submerged frame

Vinyl panels

Specifications

Tough and efficient

MAADI Group’s superior design and quality fabrication improves the performance and reliability of floating wave attenuators by using custom aluminum extrusion that combines internal links with increased torsional rigidity and high section modulus.

MAADI Group floating wave attenuators are efficient for up to 74 mile-per-hour winds that may generate three-foot wave heights. Flexible connectors between the sections of our floating wave attenuators allow for hogging and sagging movement, releasing tension.

In shallow waters, floating wave attenuators use pilings to prevent swaying and pitching.

Better, greener applications

Unlike traditional wave attenuators that use rocks or rubble, MAADI Group’s floating wave attenuators respect the natural environment. Instead of destroying marine life, our systems allow for better water circulation and fish migration. This non-invasive method is the result of a floating system anchored by pilings. Our made-to-measure extruded aluminum modules also allow for better buoyancy, eliminating anchoring problems, and do not trap debris like rubber tire systems do.

Throughout North America and the Caribbean, our breakthrough design works with nature to dissipate waves and provide superior protection.

Warranty

We offer a 2-year limited warranty on aluminum against material failure, defects and corrosion.

Conditions	Wave		Reduction
	Period (T)*	Maximum length (L)*	
Normal	1 to 2 sec.	20' (6 m)	90 to 75%
Maximum	2 to 2.8 sec.	40' (12 m)	75 to 50%
Storm	2.8 to 3.3 sec.	50' (15 m)	50 to 32%
Survival	> 3.3 sec.	> 50' (15 m)	

* Relation between the period (T) and the wavelength (L):
 $L \text{ (ft)} = 5.12 T^2$
 $L \text{ (m)} = 1.56 T^2$



Gangways

- Designs that enrich your waterfront
- Aluminum experts
- Long-term savings



Custom Gangways

Durable investment

Eye appeal

Cost effective





Photo: Tom Hurst

Design and materials

- 100% recyclable aluminum structural components and energy-efficient recycling.
- Resistant to corrosion from salt water, chemicals and pollution. A permanent film of natural oxide makes the metal less impacted or corroded by the environment.
- Suited to extreme cold, aluminum does not crack at low temperatures.
- Marine grade extruded aluminum alloy construction using 6061-T6, 6005A-T6 and 5083-H321
- Integrates well with new construction and retrofits of existing structures.

Maintenance

Virtually maintenance-free and highly cost-effective, compared with steel when total cost of ownership (TCO)¹ is considered.

Vandalism

Very easy to remove graffiti by brushing or sanding bare aluminum, compared to steel that has protective coating.

Warranty

15-year manufacturer’s limited warranty against corrosion of the aluminum main load-bearing structure.




¹ maadigroup.com/en/news/total-cost-of-ownership-aluminum-steel

Tailored Designs

Customized to your specifications and needs.

Specifications

- Overall span**
Up to 150' (45.7 m)
- Clear width**
From 3' to 10' (0.9 m to 3 m)

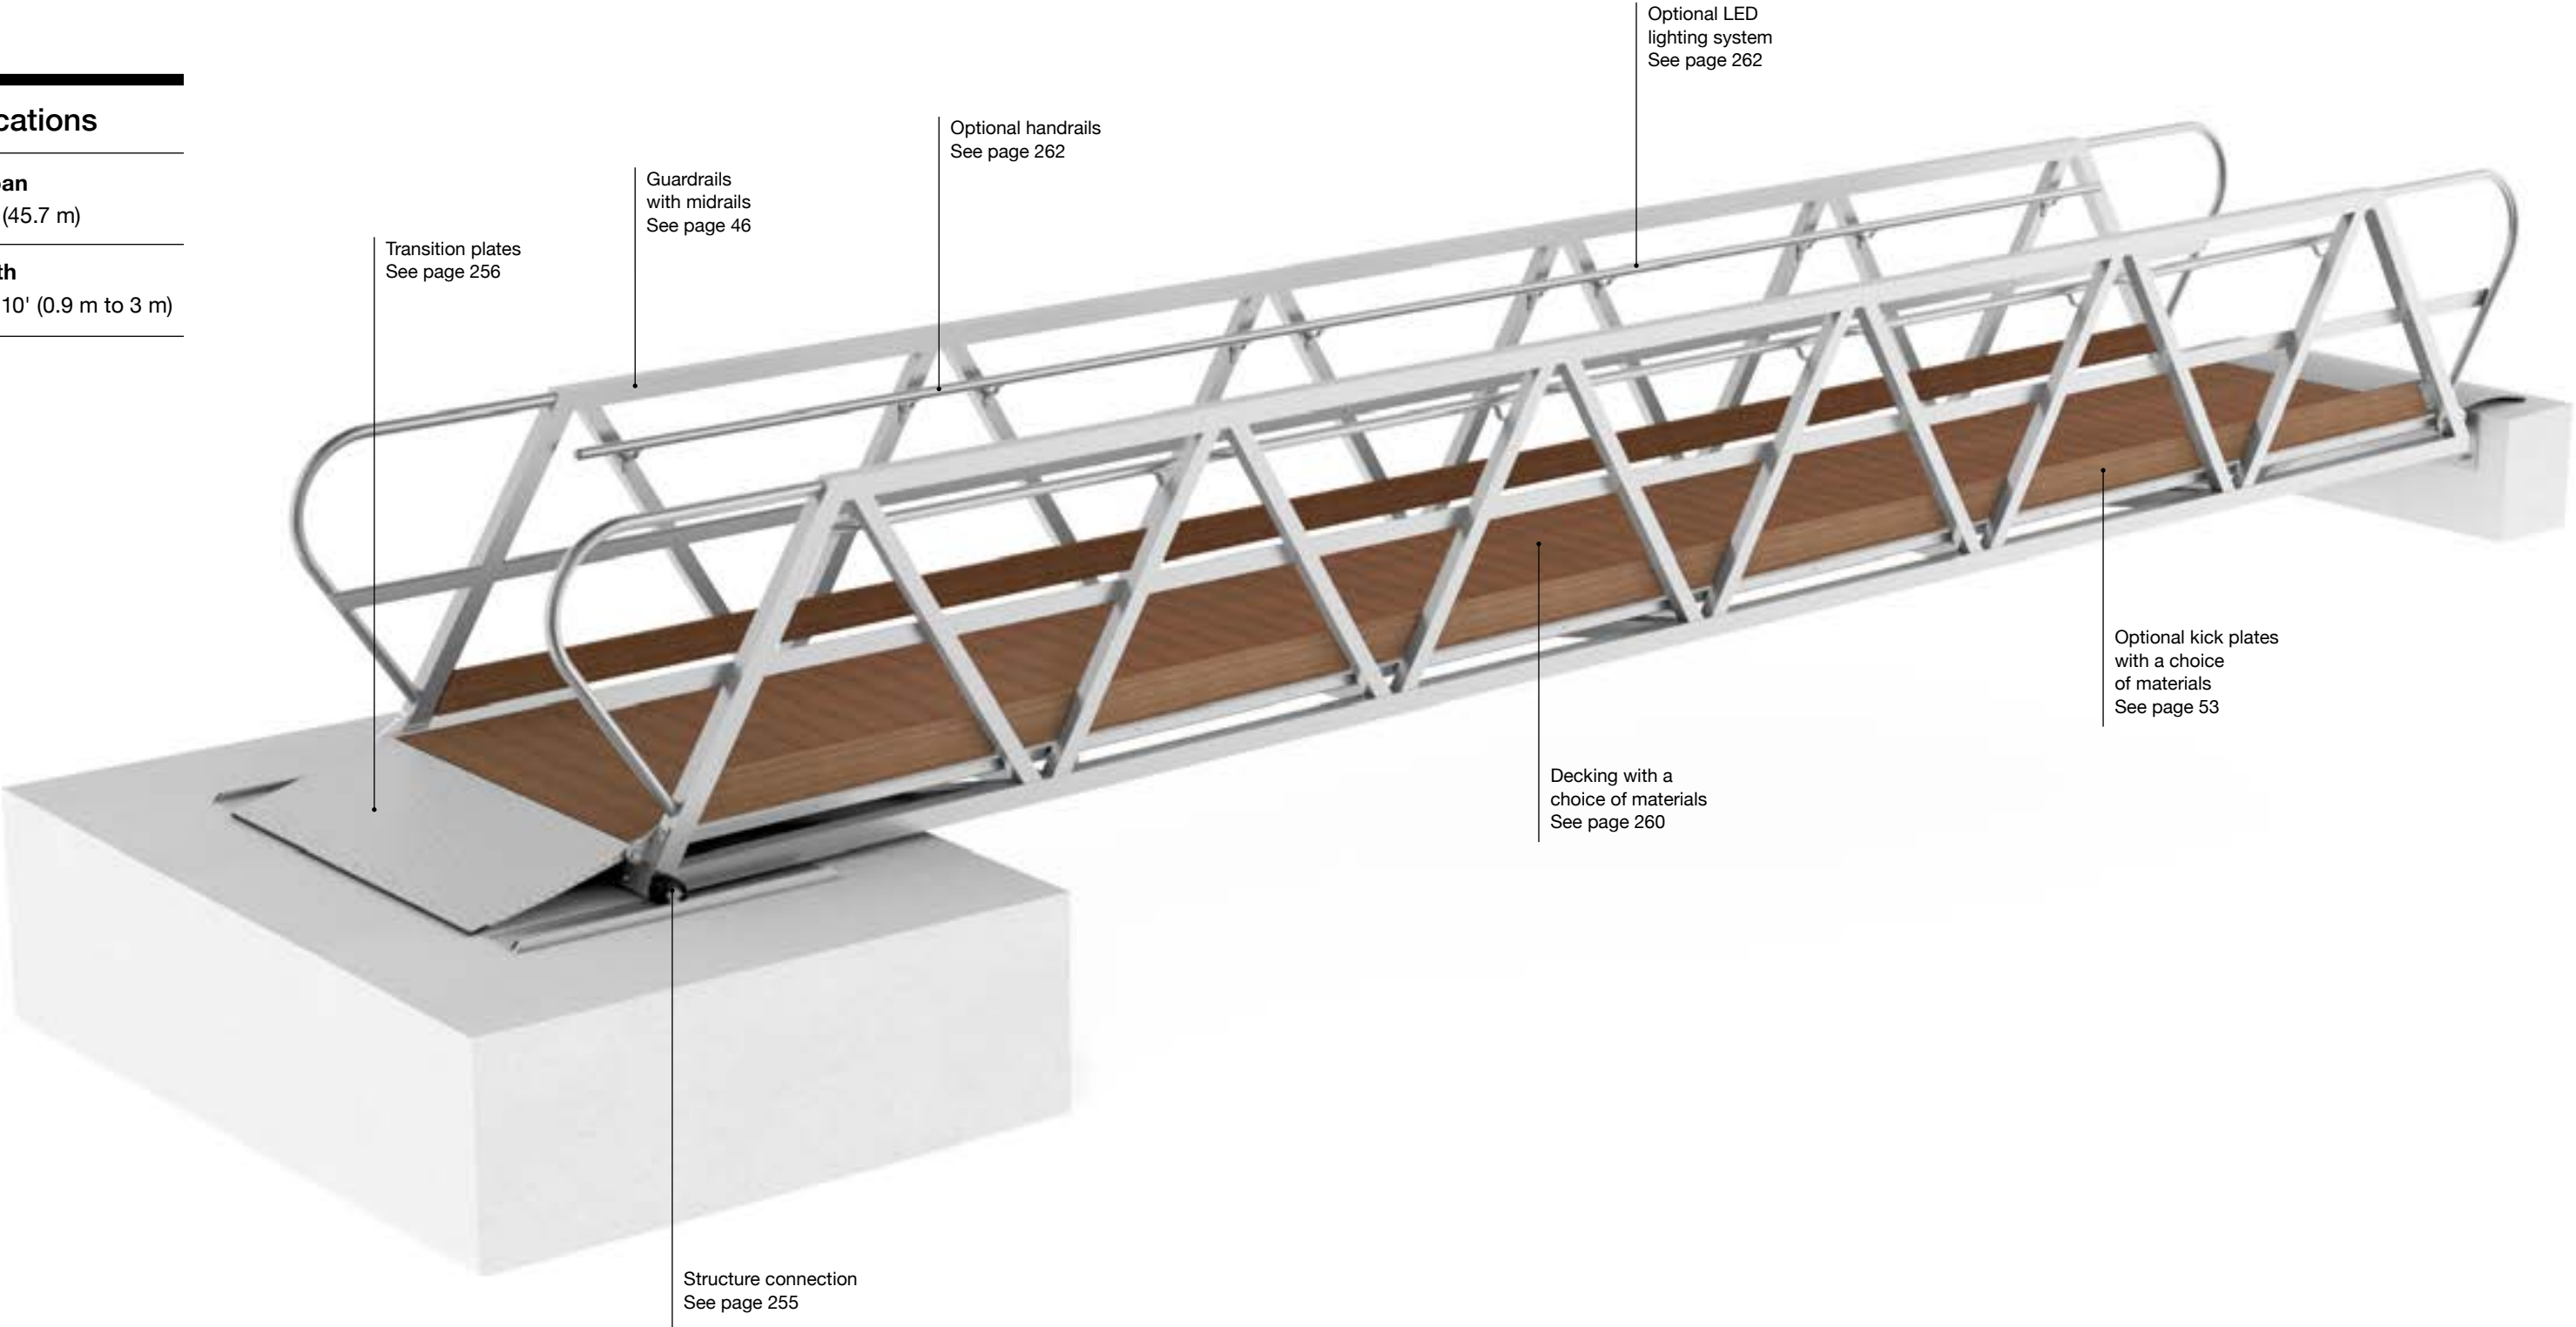

Guardrails


MAADI Group guardrail systems offer safe and practical solutions that are also attractive. Our guardrails comply with Canadian and American bridge codes and standards.



Specifications	Custom design
Material - Extruded aluminum alloy with natural finish Dimensions - Height: 42" (1,070 mm) - 2" (50 mm) midrails installed at mid-height	Option - Personalize your guardrails with your own design

Structure Connections

Each connection system is adapted to a particular application and is specified by MAADI Group engineers.

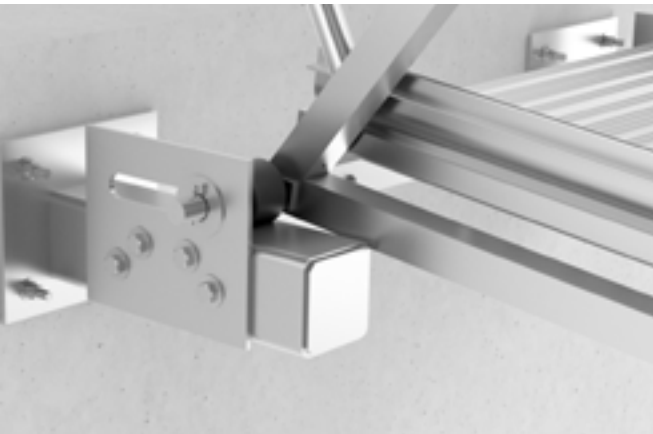

Roller and plate system
Specifications - System allows lateral and vertical movement - Usually required to link a chain-anchored floating dock to land



Flexible connector
Specifications - Connector allows small vertical movement - Usually required to link a pile-anchored floating dock to the land



Specifications
- Usually used in conjunction with roller and plate system or flexible connector on the land side - Rails are made of aluminum - Wheels are made of UHMW - Easy to install

Transition Plates

With non-slip finishing, transition plates facilitate access to the gangway from adjacent surfaces.

Flat transition plate

Specifications

- Used with the roller and rail system.
- Aluminum plate with anti-slip diamond treads.
- Comes with frictionless edge to protect decking surface.


Options

Anti-slip strips

- Aluminum plate with anti-slip extruded strips is available upon request.


Anti-slip coating

- Aluminum plate with anti-slip durable polyester powder coating is available upon request.
- Compliant with AAMA 2604-10 & ASTM D3359.

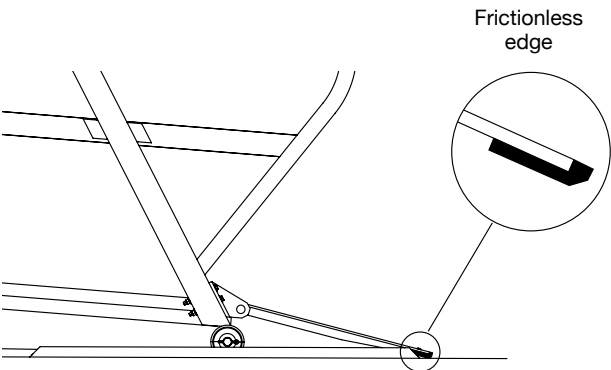

Roller and rail system


Diamond treads

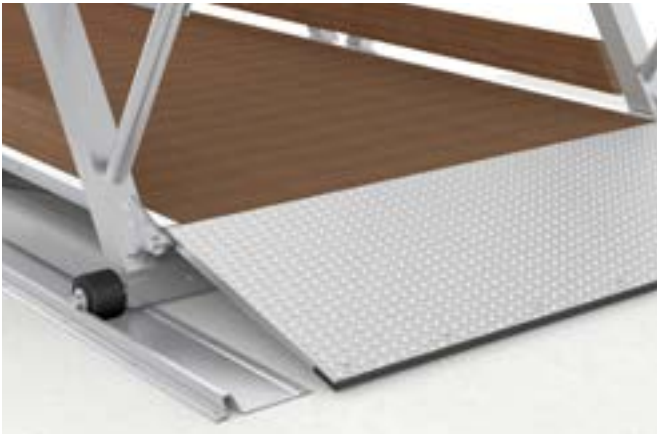

Anti-slip strips



Anti-slip coating

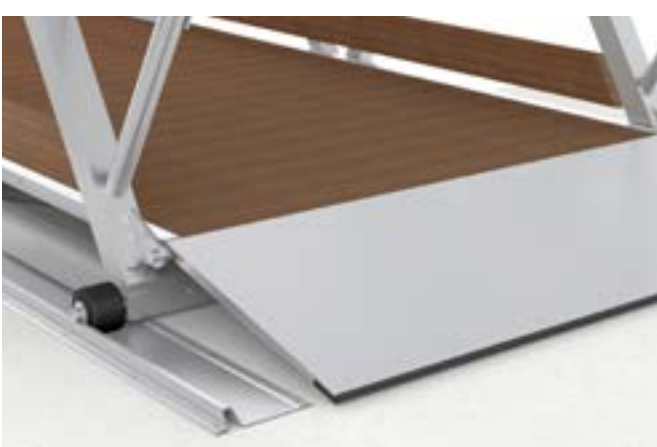

Curved transition plate

Specifications

- Used with the roller and plate system.
- Aluminum plate with anti-slip diamond treads.
- Comes with frictionless edge to protect decking surface.


Options

Anti-slip strips

- Aluminum plate with anti-slip extruded strips is available upon request.


Anti-slip coating

- Aluminum plate with anti-slip durable powder coating is available upon request.
- Compliant with AAMA 2604-10 & ASTM D3359.

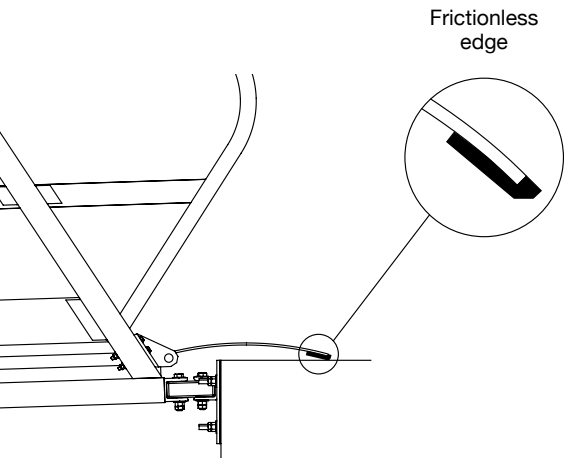

Roller and plate system

Diamond treads

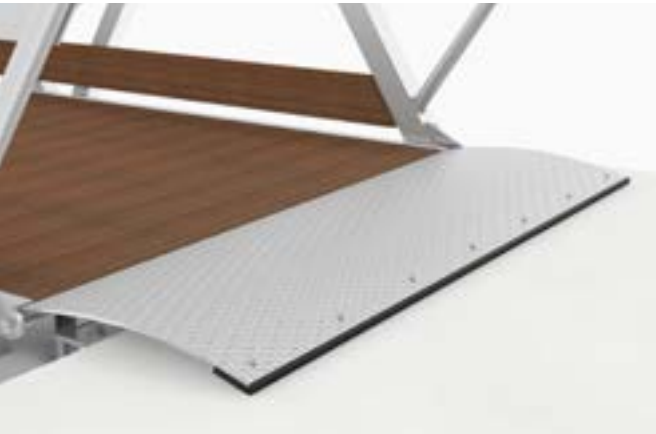

Anti-slip strips



Anti-slip coating






Customization

Decking Materials

Choose the material best suited to the function of the structure. Let our engineers advise you on the best decking for your needs.

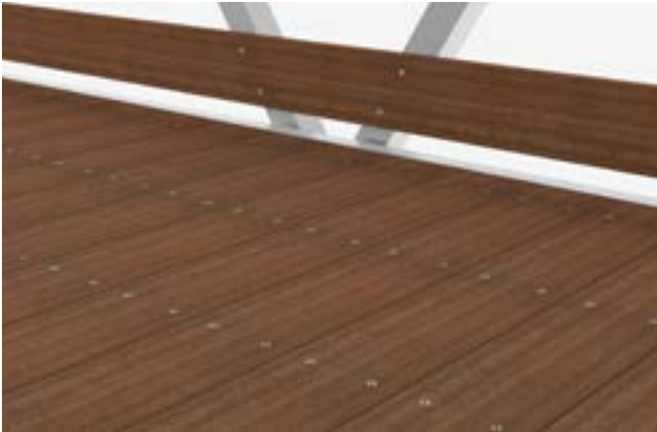

Ipe hardwood

Specifications

- Naturally very resistant to decay, rot and insect attack
- Minimum 40-year lifespan depending on use
- Low maintenance, no treating or sealing required for durability (treating may be required to keep the original color)
- Straight grain with fine to medium texture
- Economical over life of the structure
- Average density of 69 lb/ft³ (1,100 kg/m³)
- Fastened with stainless steel screws

Dimensions

- S4S outside corner
- Width varies between 5" and 7 3/8" (127 mm and 188 mm)
- Thickness varies between 1" and 1 1/2" (25 mm and 40 mm) depending on loads and applications

Option

- Other hardwood options such as ribbed cumaru are available upon request



Composite

Specifications

- Designed to resist rot, warping and fading
- Minimum 25-year lifespan depending on use
- Anti-slip ribbed surface
- Low maintenance – no treatments or sealers required
- Economical over life of the structure
- Density of 75 lb/ft³ (1,195 kg/m³)
- Fastened with stainless steel screws

Materials


- A blend of wood flour and high-density polyethylene

Dimensions

- S4S outside corner
- 7/8" x 5 1/2" (22 mm x 140 mm)

Color

- Sand

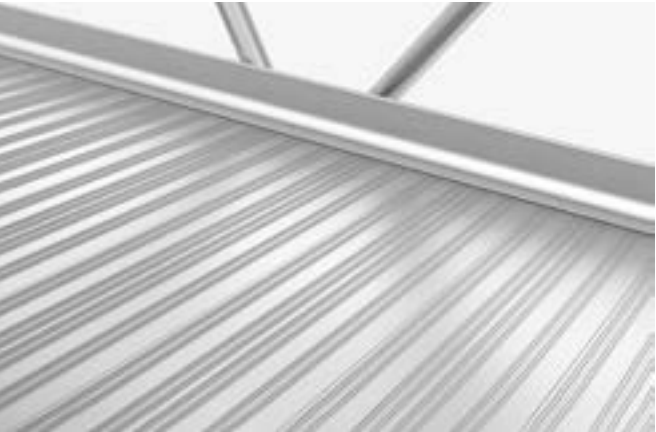

Ribbed aluminum

Specifications

- Unlimited lifespan with regular cleaning
- High grip ribbed tongue and groove planks
- Maintenance-free and corrosion-resistant – no treatments or sealers required
- 100% recyclable and reusable
- Economical over life of the structure
- Fastened with stainless steel screws

Materials


- Extruded aluminum alloy with natural finish – no paint or treatment required

Dimensions

- 7 3/8" x 1 1/4" (188 mm x 31 mm)
- Anti-slip ribs height: 1/16" (2.3 mm)

Options

Kick plates, handrails and LED lighting system are offered to further customize your gangway to best suit the application and the surrounding environment.

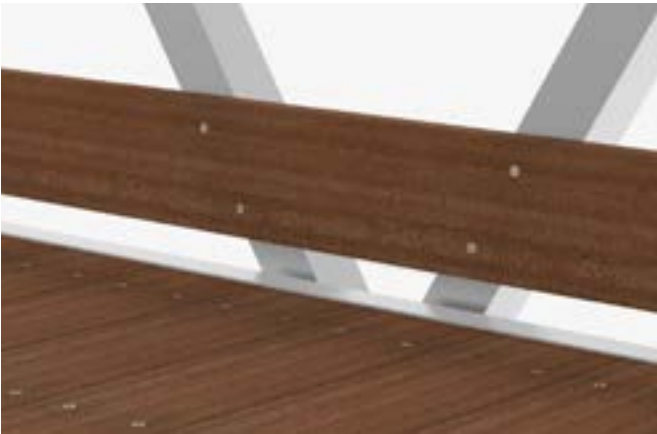

Integrated kick plates

Design

- Helps prevent objects from falling and provide a higher level of security

Material

- Extruded aluminum alloy with natural finish

Dimensions

- Height: 4" (102 mm)

Raised kick plates

Specifications

- Helps prevent objects from falling and provide a higher level of security
- Compliant with the Americans with Disabilities Act

Materials

- Ipe hardwood, wood composite or extruded aluminum alloy
- Other type of woods are availbale upon request

Dimensions

- Wood or wood composite
Heights: 3 1/2" (89 mm), 5 1/2" (140 mm) or 7 1/4" (184 mm)
- Aluminum
Heights: 4" (102 mm), 6" (152 mm) or 8" (203 mm)



Handrails

Material

- Extruded aluminum alloy with natural finish

Dimensions

- Diameter: from 1 1/4" to 2" (from 32 mm to 50 mm)
- 2" (50 mm) hand clearance

Height

- Standard: 36" (915 mm)
- ADA¹: 24" (610 mm)

Option

- Double handrails (ADA) are available upon request

LED lighting system

Options

- White LED lighting system
- White or RGB programmable LED light projector system
- Handrail-integrated lighting system

¹ Americans with Disabilities Act

Projects



Briland Club Marina

Harbour Island, Bahamas

Location



Overall spans
40' (12.2 m)

Clear width
7' 10" (2.4 m)



Pedestrian load
100 psf (4.8 kPa)

Vehicular load
924 lb (420 kg)

Bridge self-weight
4,800 lb (2,177 kg)

Wind pressure
41.8 psf (2 kPa)

Gangway style
Glacier

Options
Ipe hardwood decking and kick plates, aluminum guardrails with midrails and handrails



City Commons Waterfront Docks

West Palm Beach, USA

Location



Photo: Tom Hurst

Overall spans 80' (24 m)	Pedestrian load 100 psf (4.8 kPa)	Bridge self-weight 9,600 lb (4,354 kg)	Gangway style Glacier
Clear width 7' 10" (2.4 m)	Vehicular load N/A	Wind pressure 11.5 psf (550 Pa)	Options Aluminum bar grating decking, aluminum kick plates and guardrails with horizontal railings, aluminum handrails with integrated LED lighting



International Cruise Ship Ferry Landing

La Baie, Quebec

Location



See this project
in action



Overall spans
118' 1" (36 m)

Clear width
4' (1.2 m)



Pedestrian load
50 psf (2.4 kPa)

Vehicular load
N/A

Bridge self-weight
7,680 lb (3,484 kg)

Wind pressure
8.6 psf (410 Pa)

Gangway style
Tremblant

Options
Shur Grip aluminum
decking, aluminum
guardrails with horizontal
railings



Port of Quebec

Quebec City, Quebec

Location



Overall span 72' 2" (22 m)	Pedestrian load 100 psf (4.8 kPa)	Bridge self-weight 6,600 lb (3,000 kg)	Gangway style Glacier
Clear width 5' 7" (1.7 m)	Vehicular load N/A	Wind pressure 12.6 psf (604 Pa)	Options Ribbed aluminum decking, guardrails with horizontal railings and handrails in aluminum
			

Mingan Archipelago National Park Reserve

Havre-Saint-Pierre, Quebec

Location



Overall span 48' 5¼" (14.8 m)	Pedestrian load 52 psf (2.5 kPa)	Bridge self-weight 2,270 lb (1,030 kg)	Gangway style Glacier
Clear width 4' (1.2 m)	Vehicular load N/A	Wind pressure 16.4 psf (785 Pa)	Options Treated wood decking, aluminum guardrails with horizontal railings



Davie Shipyard

Lévis, Quebec

Location



Overall span 60' & 50' (18.3 m & 15.2 m)	Pedestrian load 100 psf (4.8 kPa)	Bridge self-weight 6,160 lb & 5,280 lb (2,800 kg & 2,400 kg)	Gangway style Glacier
Clear width 4' (1.2 m) 	Vehicular load N/A	Wind pressure 8.4 psf (410 Pa)	Options Aluminum shur grip decking with wooden treads, aluminum guardrails, midrails and canopy structures



Laurentian Pilotage Authority

Les Escoumins, Quebec

Location



Overall span 35' 9" (10.9 m)	Pedestrian load 50 psf (2.4 kPa)	Bridge self-weight 1,520 lb (690 kg)	Gangway style Stair
Clear width 2' (0.6 m)	Vehicular load N/A	Wind pressure 11.5 psf (550 Pa)	Options Aluminum grip span adjustable steps, guardrails with horizontal railings



Gangway Kits

- Visual appeal
- Ready now
- Cost-effective investment
- Award-winning innovation





MakeABridge®

MakeABridge® gangways are engineered to be ultra-light, yet strong and durable to provide safe and reliable access to marinas. Our weld-free system is impervious to corrosion from salt water, chemicals or pollution.

In addition to being aesthetically pleasing, our unique patented system uses off-the-shelf components, allowing for fast shipping and easy installation.

We offer a wide choice of finishes and options to create a durable, economical and distinctive structure customized to your specifications and needs.

Specifications

Design and materials

- 100% recyclable aluminum structural components and energy-efficient recycling.
- No welding – the aluminum maintains its full structural integrity.
- Resistant to corrosion from salt water, chemicals and pollution. A permanent film of natural oxide makes the metal less impacted or corroded by the environment.
- Suited to extreme cold, aluminum does not crack at low temperatures.
- Marine grade extruded aluminum alloy construction using 6061-T6, 6005A-T6 and 5083-H321
- Fasteners in stainless steel 300 series.
- Destructive testing¹ conducted at ETS (École de technologie supérieure) in Montreal (Quebec) and at the University of Waterloo (Ontario) to verify the structure’s ductility.
- Integrates well with new construction and retrofits of existing structures.

Patents

- Canada 2,607,711; Canada 2,869,050
- US 8,667,633; US 8,590,084; US 7,882,586; US 7,568,253
- Patents pending WO 2010/040205 A1 – 12/495,084

Easy shipping

- Standard off-the-shelf components available in three to four weeks, ready to be shipped flat on standard-size trailers anywhere in North America, and in four to six weeks anywhere worldwide.
- Delivery is four to eight times faster than conventional welded bridges.
- Much lower shipping costs than conventional structures.
- Delivered in bundles to your construction site of 20 ft x 4 ft x 2 ft (6.1 m x 1.2 m x 0.6 m).
- Maximum weight of each component is 110 lb (50 kg).

Fast assembly and installation

- Lighter and easier to install than competitive steel, wood or concrete products.
- Assembled on site by three people with standard tools and equipment.
- Typical footbridge 30 ft (9 m) assembly in about 5 hours.

Watch the video

youtube.com/watch?v=x5K_QChK3Wg

Maintenance

Virtually maintenance-free and highly cost-effective, compared with steel when total cost of ownership (TCO)² is considered.

Vandalism

Optional anti-theft/anti-vandalism fasteners.

Warranty

15-year manufacturer’s limited warranty against corrosion of the aluminum main load-bearing structure.



Awards received

The MakeABridge® system has received many design and innovation awards since 2006.

2013

Winner

Product innovation award: architectural products magazine

2010

Finalist

Génie Innovation

2009

New technology prize

Quebec Region, Canadian manufacturers & exporters and CNRC-PAR1

Honorable mention

Contech innovation trophies

Finalist

Among 487 firms participating in the VoirGRAND.tv³ competition

2008

First Place

Category structure, International Aluminum Extrusion Design Competition of ET Foundation.

2006

Finalist

Les Anges financiers competition, Montreal

¹ maadigroup.com/en/news/make-a-bridge-in-university-of-waterloo-vibration-study

² maadigroup.com/en/news/total-cost-of-ownership-aluminum-steel

³ mvivemtia.ca

Tailored Designs

Customized to your specifications and needs.


Specifications

Overall span

From 20' to 60'
(6.1 m to 18.3 m)

Clear width

From 3' to 6'
(0.9 m to 1.8 m)

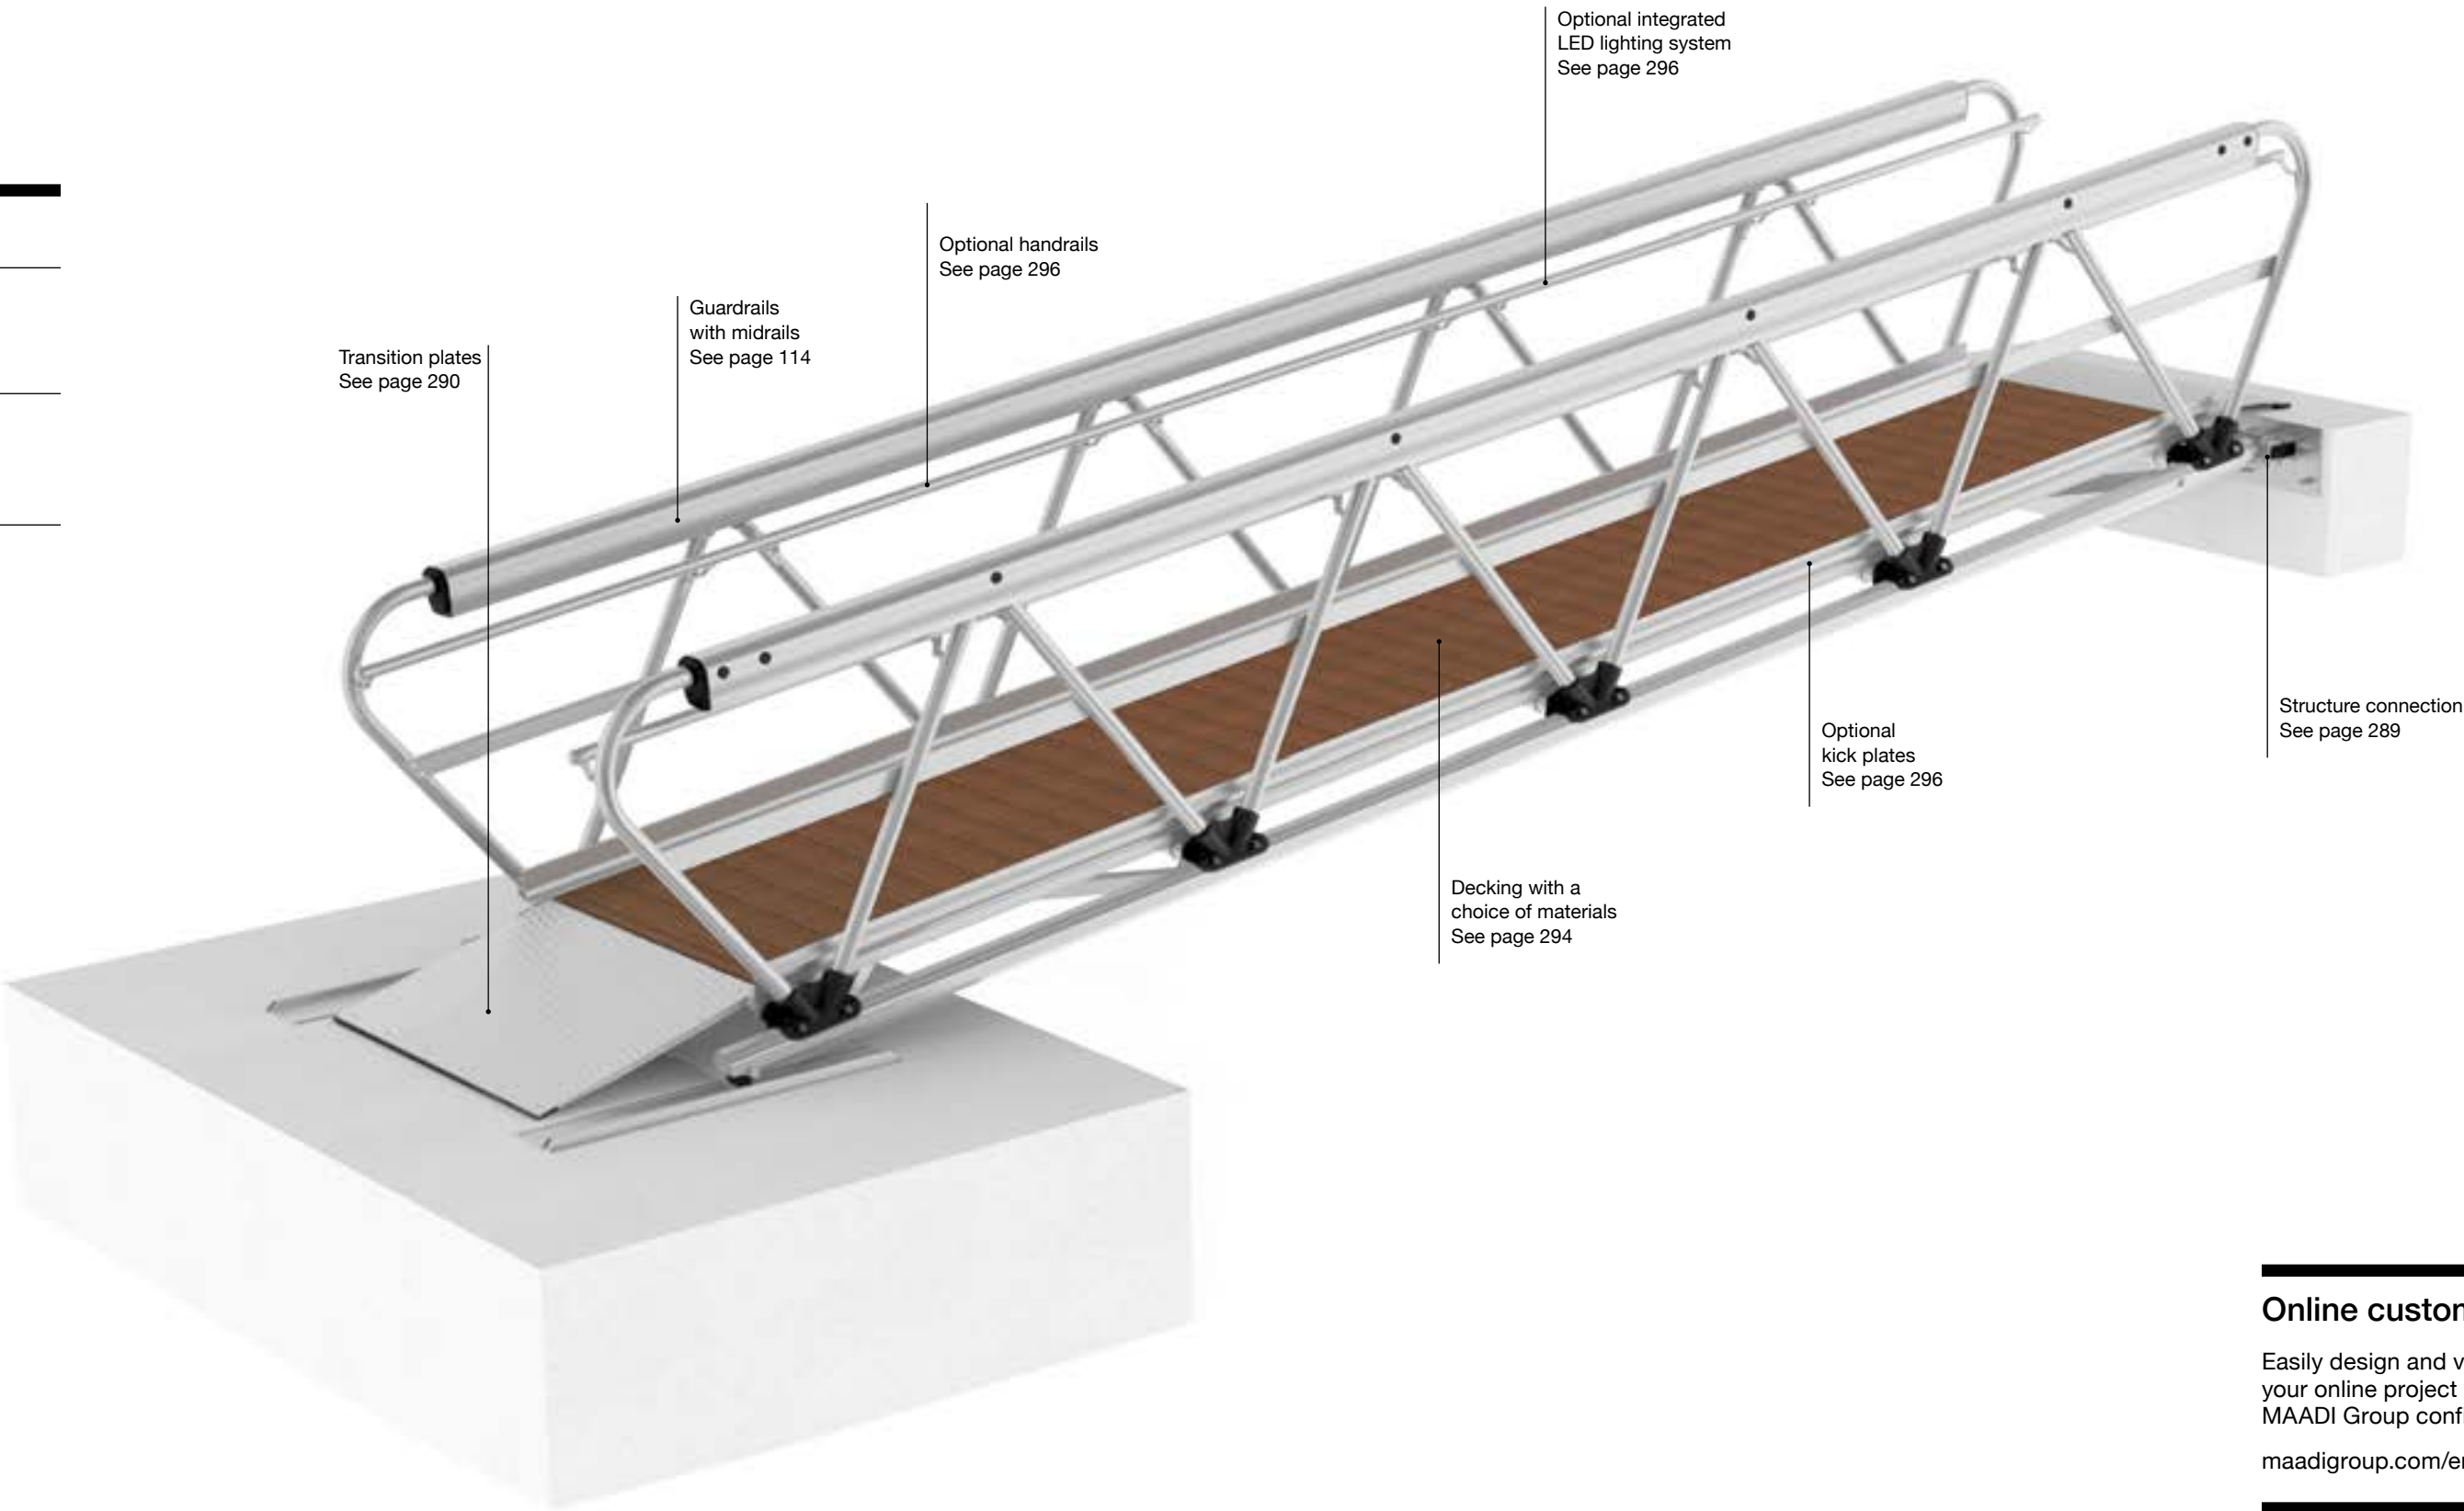

Online customizer

Easily design and visualize your online project with the MAADI Group configurator.
maadigroup.com/en/customizer

Guardrails


MAADI Group guardrail systems offer safe and practical solutions that are also attractive. Our guardrails comply with Canadian and American bridge codes and standards.



Specifications	Custom design
Material and finish - Extruded aluminum alloy with clear anodized finish - Only extruded parts can be anodized Dimensions - Height: 42" (1,070 mm) - 2" (50 mm) mid-rails installed at mid-height Option - Powder coat finish available upon request	Option - Personalize your guardrails with your own design

Structure Connection

Each connection system is adapted to a particular application and is specified by MAADI Group engineers.

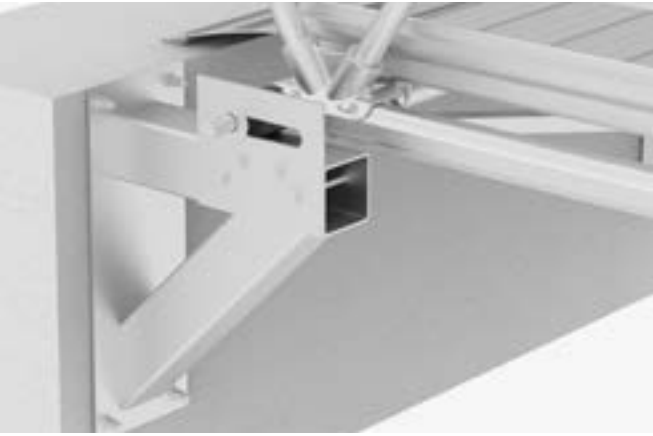

Roller and plate system
Specifications - System allows lateral and vertical movement - Usually required to link a chain-anchored floating dock to land



Flexible connector
Specifications - Connector allows small vertical movement - Usually required to link a pile-anchored floating dock to land



Roller and rail system
Specifications - Usually used in conjunction with roller and plate system or flexible connector on land - Rails are made of aluminum - Wheels are made of UHMW - Easy to install

Transition Plates

With non-slip finishing, transition plates facilitate access to the gangway from adjacent surfaces.

Flat transition plate

Specifications

- Used with the roller and rail system.
- Aluminum plate with anti-slip diamond treads.
- Comes with frictionless edge to protect decking surface.


Options

Anti-slip strips

- Aluminum plate with anti-slip extruded strips is available upon request.

Anti-slip coating

- Aluminum plate with anti-slip durable polyester powder coating.
- Compliant with AAMA 2604-10 & ASTM D3359.

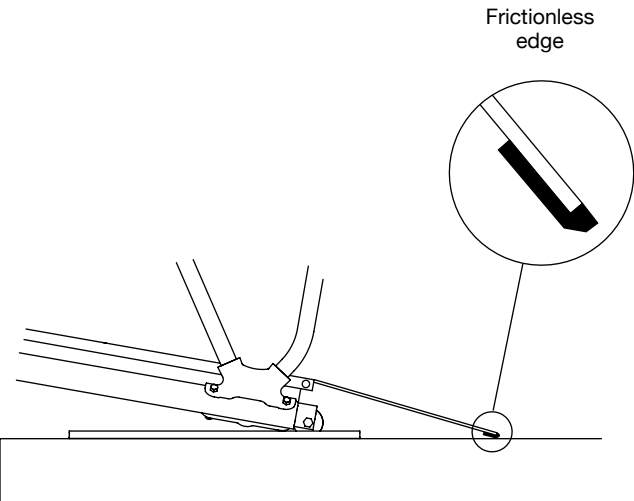

Roller and rail system

Diamond treads



Anti-slip strips



Anti-slip coating



Curved transition plate

Specifications

- Used with the roller and plate system.
- Aluminum plate with anti-slip diamond treads.
- Comes with frictionless edge to protect decking surface.


Options

Anti-slip strips

- Aluminum plate with anti-slip extruded strips is available upon request.

Anti-slip coating

- Aluminum plate with anti-slip durable polyester powder coating.
- Compliant with AAMA 2604-10 & ASTM D3359.

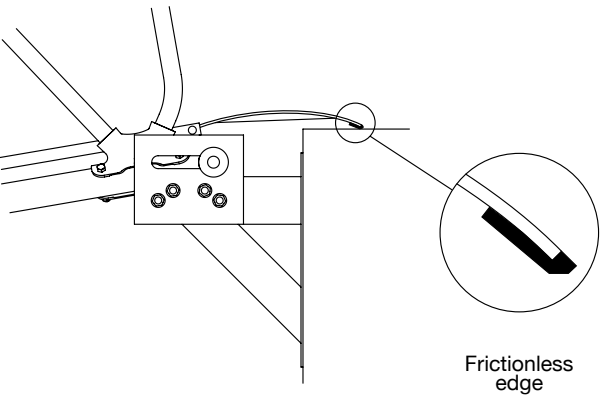


Roller and plate system


Diamond treads



Anti-slip strips

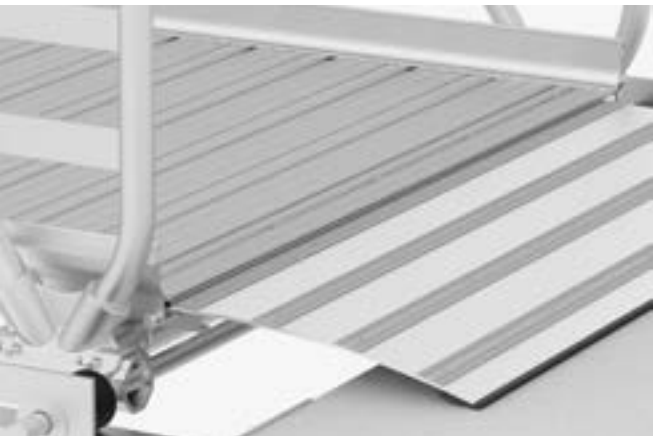

Anti-slip coating

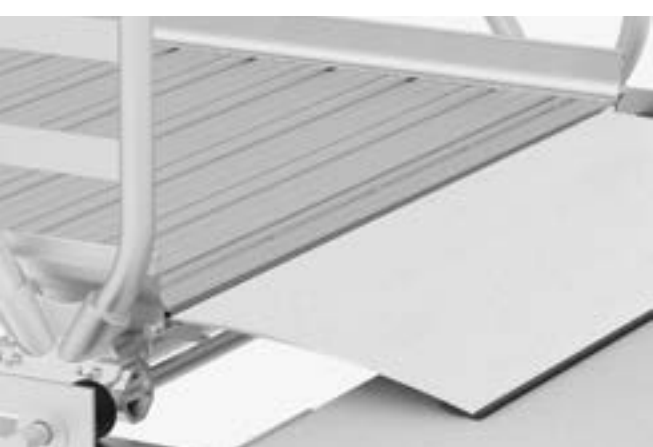

Customization



Decking Materials

Our engineers will guide you in choosing the most suitable decking for the use of the structure, taking into account safety and maintenance.



Ipe hardwood

Specifications

- Naturally very resistant to decay, rot and insect attack
- Minimum 40-year lifespan depending on use
- Low maintenance, no treating or sealing required for durability (treating may be required to keep the original color)
- Straight grain with fine to medium texture
- Economical over life of the structure
- Average density of 69 lb/ft³ (1,100 kg/m³)
- Fastened with stainless steel screws

Dimensions

- S4S outside corner
- Width varies between 5" and 7 3/8" (127 mm and 188 mm)
- Thickness varies between 1" and 1 1/2" (25 mm et 40 mm) depending on loads and applications

Option

- Other hardwood options such as ribbed cumaru are available upon request



Composite

Specifications

- Designed to resist rot, warping and fading
- Minimum 25-year lifespan depending on use
- Anti-slip ribbed surface
- Low maintenance – no treatments or sealers required
- Economical over life of the structure
- Density of 75 lb/ft³ (1,195 kg/m³)
- Fastened with stainless steel screws

Materials


- A blend of wood flour and high-density polyethylene

Dimensions

- S4S outside corner
- 7/8" x 5 1/2" (22 mm x 140 mm)

Color

- Sand

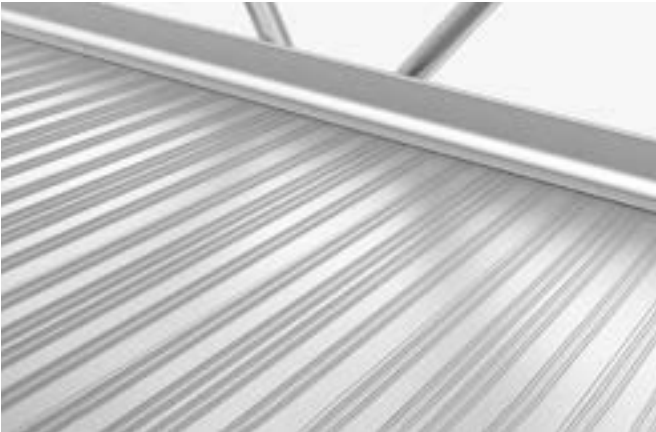

Ribbed aluminum

Specifications

- Unlimited lifespan with regular cleaning
- High grip ribbed tongue and groove planks
- Maintenance-free and corrosion-resistant – no treatments or sealers required
- 100% recyclable and reusable
- Economical over life of the structure
- Fastened with stainless steel screws

Materials

- Extruded aluminum alloy with natural finish – no paint or treatment required

Dimensions

- 7 3/8" x 1 1/4" (188 mm x 31 mm)
- Anti-slip ribs height: 1/16" (2.3 mm)


Options

Various options are offered to further customize your structure to best suit the application and the surrounding environment.



Integrated kick plates

- Specifications**
 - Helps prevent objects from falling and provide a higher level of security
- Material**
 - Extruded aluminum alloy with clear anodized finish
- Dimensions**
 - Height: 4" (102 mm)

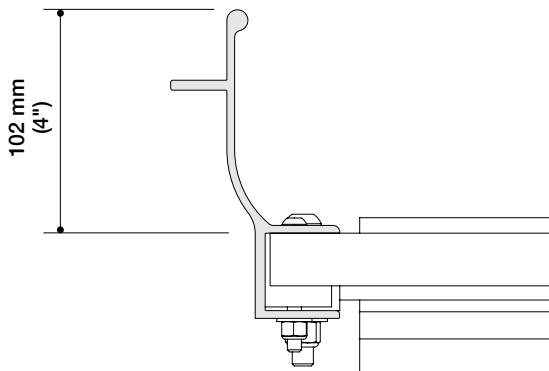

Handrails

- Material**
 - Extruded aluminum alloy with clear anodized finish
- Dimensions**
 - Diameter: 1 1/4" to 2" (32 mm to 50 mm)
 - 2" (50 mm) hand clearance
 - Standard height: 36" (915 mm)
 - ADA height: 24" (610 mm)
- Option**
 - Double handrails (ADA) are available upon request



Integrated LED lighting system

- Specifications**
 - Integrated into the guardrails
- Options**
 - Programmable RGB LED
 - White LED

Projects



Mingan Archipelago National Park Reserve Gangway

Havre-Saint-Pierre, Quebec

Location



Overall span 48' 6" (14.8 m)	Pedestrian load 84 psf (4 kPa)	Bridge self-weight 2,780 lb (1,260 kg)	Options Aluminum decking, midrails and kick plates, clear anodized finish
Clear width 4' (1.2 m)	Vehicular load N/A	Wind pressure 16.4 psf (785 Pa)	



Bota Bota Spa-sur-l'eau

Montreal, Quebec

Location



Overall span
45', 20' & 12'
(13.7 m, 6.1 m & 3.7 m)

Clear width
6' & 4' (1.8 m & 1.2 m)



Pedestrian load
100 psf (4.8 kPa)

Vehicular load
N/A

Bridge self-weight
2,866 lb, 1,100 lb & 606 lb
(1,300 kg, 500 kg & 275 kg)

Wind pressure
12.5 psf (600 Pa)

Options
Ribbed aluminum decking,
aluminum guardrails and
kick plates, LED lighting



Tactical and Emergency Bridges

Lightning fast deployment

Easy assembly

Adaptable to any situation

Durable investment





Our bridges are designed for fast installation with basic tools.

Keeping Communities Prepared

With floods and forest fires on the rise, civil security becomes increasingly vital to communities preparing for unforeseen minor and major disasters.

The versatile lightweight vehicle tactical bridges (LVTB), bundled for easy transport and set-up, make emergency preparedness planning by municipalities and governments easier.

The unique patented MakeABridge® weld-free system optimizes durability and efficiency. Easy to assemble, it allows on-site repairs without any specialized labour.

Structurally strong and cover long spans, our LVTB-1811 and LVTB-2418 bridges can withstand heavy use and harsh climates.

MakeABridge®

Specifications

The high-strength yet lightweight aluminum alloy components of our bridges are engineered to maximize load-bearing capacity with minimal structural weight.

Design and materials

- 100% recyclable aluminum structural components and energy-efficient recycling.
- No welding – the aluminum maintains its full structural integrity.
- Corrosion-resistant and maintenance-free aluminum structure.
- Suited to extreme cold, aluminum does not crack at low temperatures.
- High-strength alloy construction using 6005A-T6, 6061-T6, AA357-T6.
- Strength UTS of 260-290 MPa.
- Fasteners in stainless steel 300 series.
- Each element has maximum weight of 258 lb (117 kg).
- Aluminum anti-skid deck panels.
- Army green durable powder coat finish.

Patents

- US 8,667,633; US 8,590,084; US 7,882,586; US 7,568,253
- Canada 2,607,711; Canada 2,869,050
- Patents pending WO 2010/040205 A1 – 12/495,084

Easy shipping

- Much lower shipping costs than conventional structures.
- Digitally produced and shipped with separate parts, and can be delivered in far less time than competitive products.
- Standard off-the-shelf components available in 2 to 3 weeks, ready to be shipped flat anywhere in North America, and in 4 to 6 weeks anywhere worldwide.
- Delivered in bundles of 20' x 4' x 2' (6.1 m x 1.2 m x 0.6 m).

Shipping container upon request

- Shipped in a standard size 20' (6 m) container designed to protect components during transport and arranged for easy access once at destination.

For more details, see page 330.

Our Bridges

Characteristics	LVTB-1811 More details	LVTB-2418 More details
Modular design	No	Yes, six modules. More details
Overall span	From 20' to 60' (From 6.1 to 18.3 m)	From 26' 3" to 78' 9" (From 8 m to 24 m)
Clear width	From 3' to 6' (From 0.9 m to 1.8 m)	7' 2" (2.18 m)
Pedestrian load	84 psf (4 kPa)	90 psf (4.3 kPa)
Vehicular load	2,510 lb (1,140 kg)	5,000 lb (2,268 kg) – 3 axles
Horizontal launching system	Yes	Yes
Fast assembly time	Less than 90 minutes More details	Four hours More details
Custom trailer	No	Yes. More details

LVTB-1811

Lightweight Bridges


Strong and light

Ultra-fast assembly

Quick shipping



Strong and Light

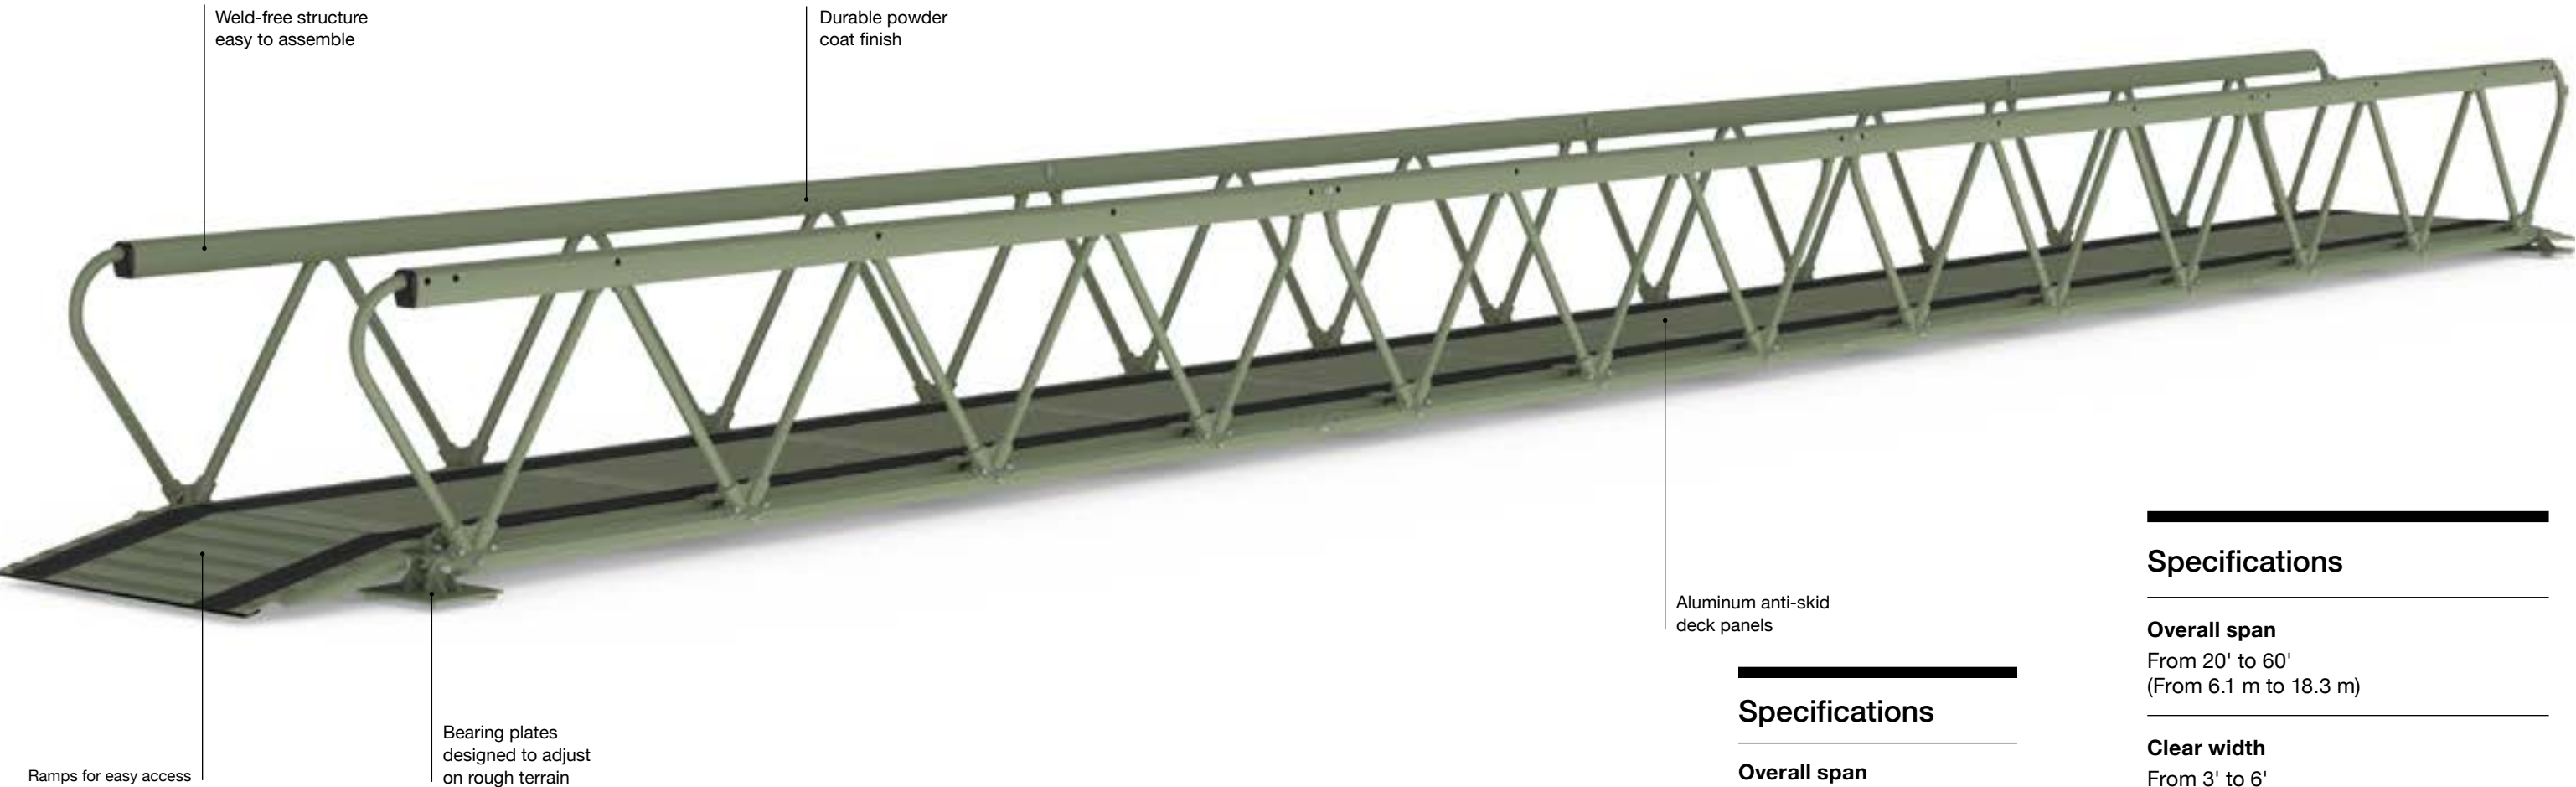

Online customizer

Easily design and visualize your online project with the MAADI Group configurator.

maadigroup.com/en/customizer

Specifications

- Overall span**
From 20' to 60'
(6.1 m to 18.3 m)
- Clear width**
From 3' to 6'
(0.9 m to 1.8 m)
- Option**
Shipped in 20 ft (6 m) standard container, for more details, see page 330.

Specifications

- Overall span**
From 20' to 60'
(From 6.1 m to 18.3 m)
- Clear width**
From 3' to 6'
(From 0.9 m to 1.8 m)
- Pedestrian load**
84 psf (4 kPa)
- Vehicular load**
2,510 lb (1,140 kg)
- Ultimate tensile strength (UTS)**
260 to 290 MPa

Fast Assembly and Installation

Lighter and easier to install than competitive steel products

On-site assembly with standard tools and equipment

Requires a minimum of four soldiers with basic tools

Bridge 59' 5" (18.1 m) in less than 90 minutes by 8 soldiers



See how it works



Technical guide

Step-by-step assembly and installation instructions, from site preparation to bridge launching

Includes a complete bill of materials (BOM) of the components, hardware and tools





With the horizontal launching system, the bridge installation requires no heavy machinery.

Bridge in a Box

Sturdy and optimized for travel



Easy shipping

Standard off-the-shelf components ready to be shipped worldwide

Shipped in a standard size 20' (6 m) container

Much lower shipping costs than steel structures

Delivery is four to eight times faster than for conventional welded bridges

The container is designed to protect components during transport and arranged for easy access once at destination.



LVTB-2418

Modular Bridges

Bridge in a box

Lightning-fast assembly

Structurally strong



Designed specifically for
NATO side-by-side UTV



Modular Solution


Allows the length to be adjusted according to the size of the obstacle to cross.

Specifications

Clear width
7' 2" (2.18 m)

Pedestrian load
90 psf (4.3 kPa)

Vehicular load
5,000 lb (2,268 kg) – 3 axles

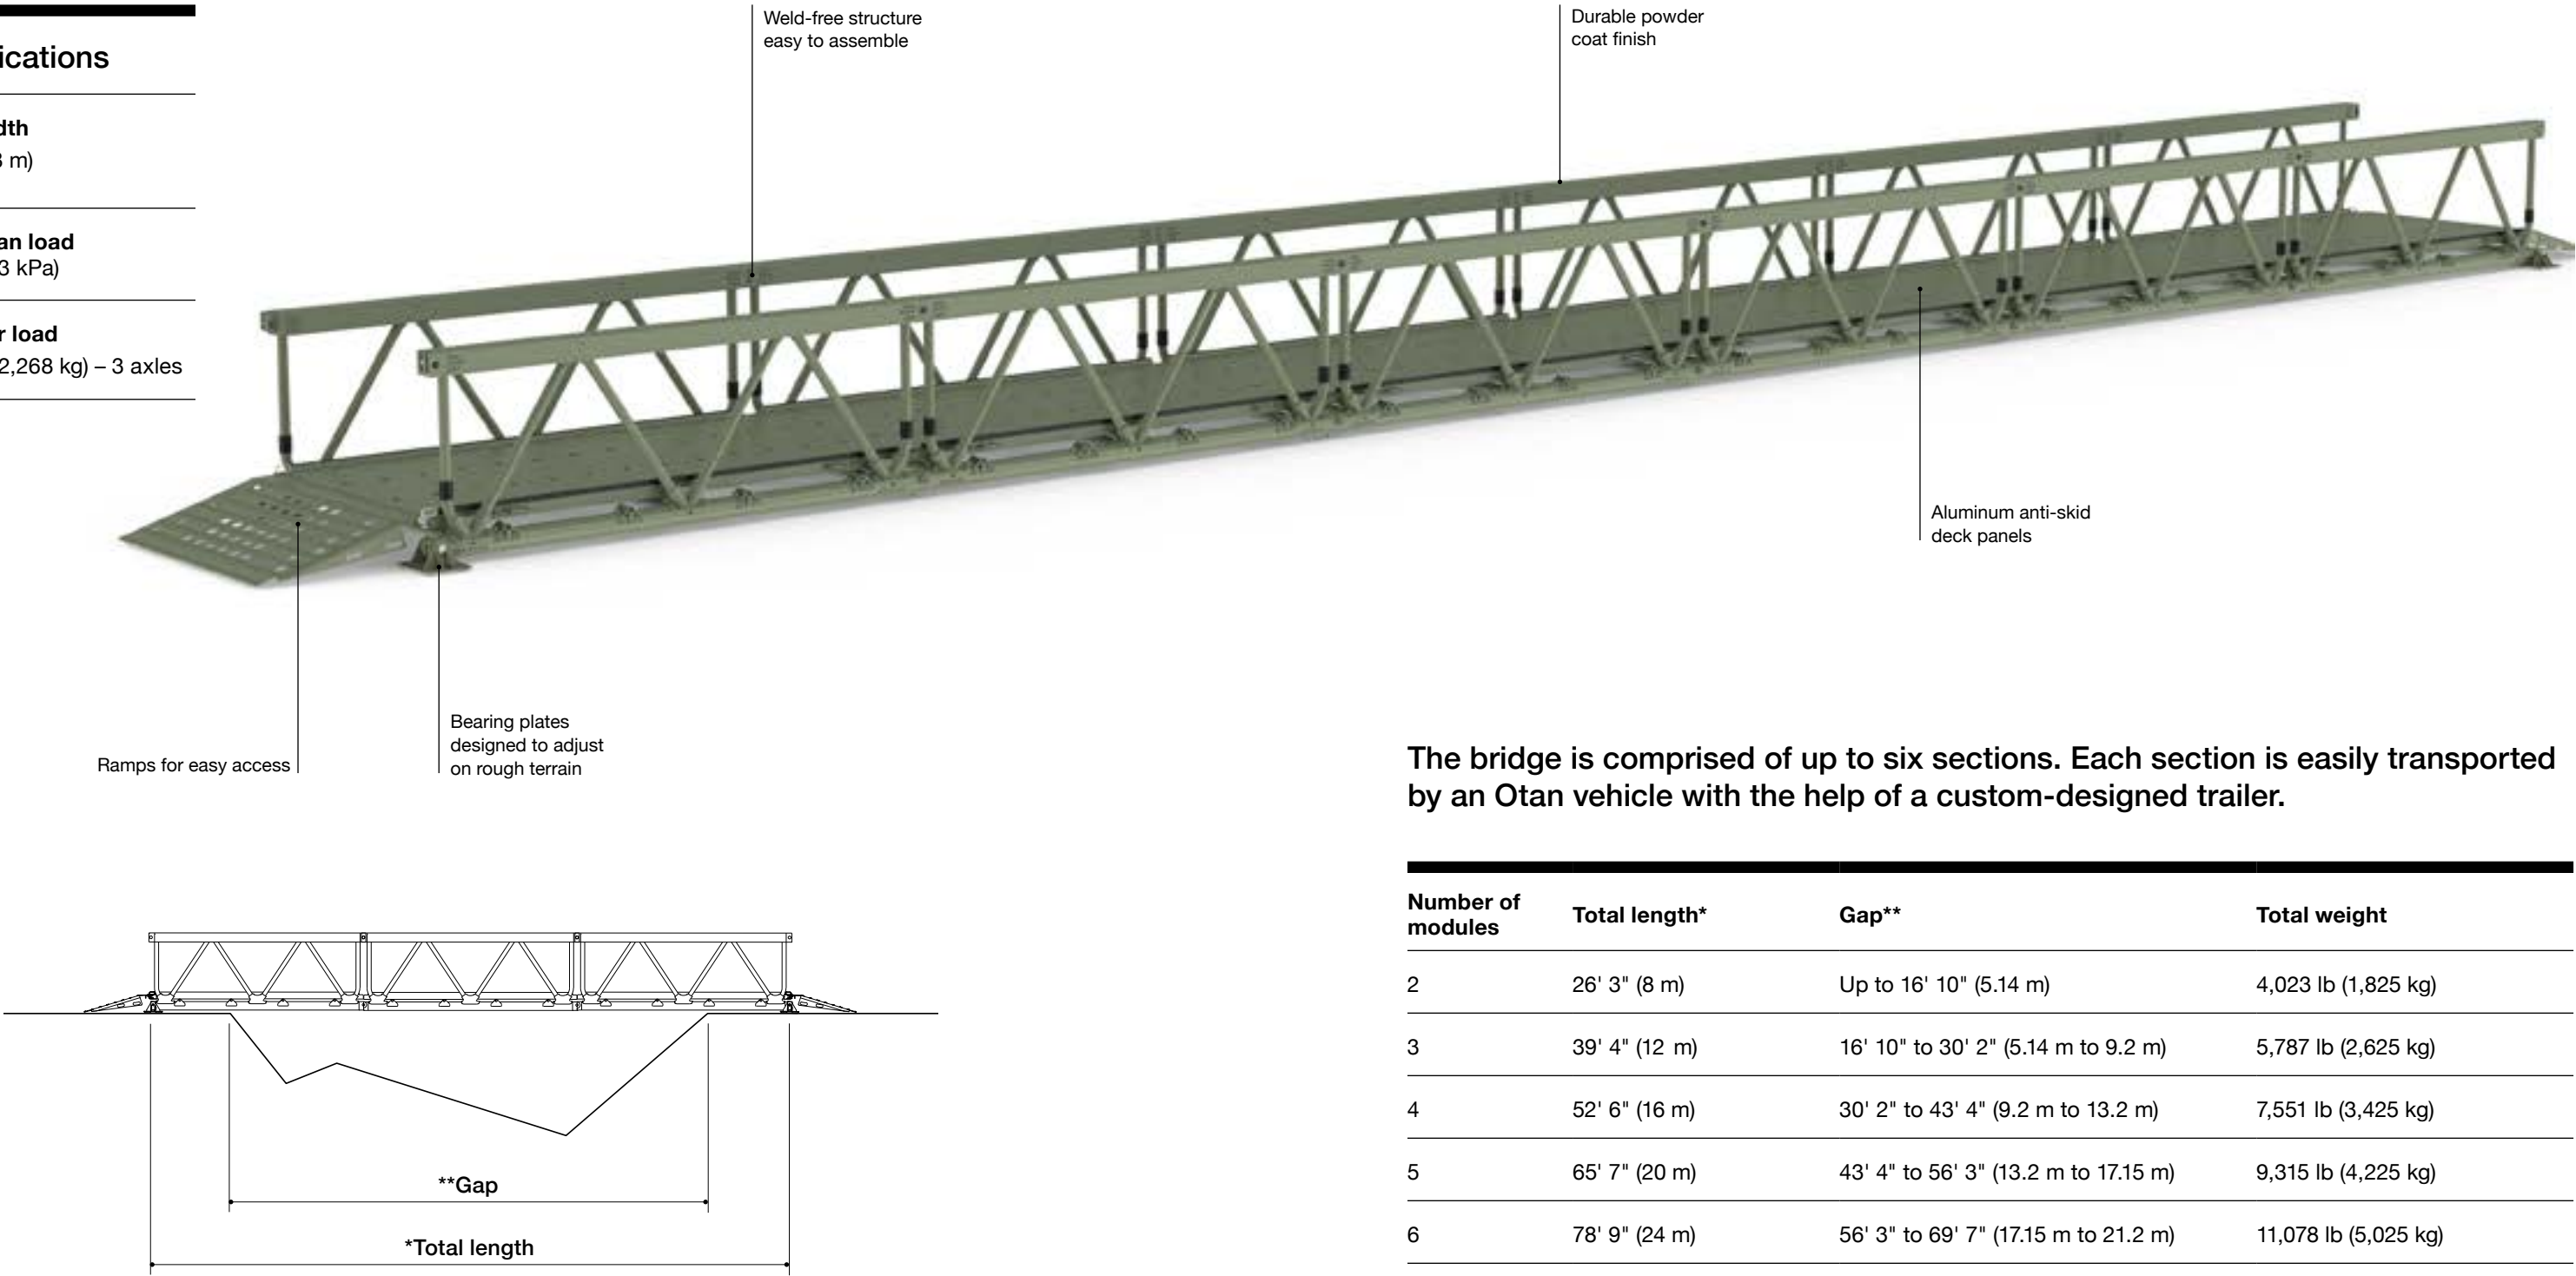

The bridge is comprised of up to six sections. Each section is easily transported by an Otan vehicle with the help of a custom-designed trailer.

Number of modules	Total length*	Gap**	Total weight
2	26' 3" (8 m)	Up to 16' 10" (5.14 m)	4,023 lb (1,825 kg)
3	39' 4" (12 m)	16' 10" to 30' 2" (5.14 m to 9.2 m)	5,787 lb (2,625 kg)
4	52' 6" (16 m)	30' 2" to 43' 4" (9.2 m to 13.2 m)	7,551 lb (3,425 kg)
5	65' 7" (20 m)	43' 4" to 56' 3" (13.2 m to 17.15 m)	9,315 lb (4,225 kg)
6	78' 9" (24 m)	56' 3" to 69' 7" (17.15 m to 21.2 m)	11,078 lb (5,025 kg)

Fast Assembly and Installation

Lighter and easier to install than competitive steel products

On-site assembly with standard tools and equipment

Requires a minimum of twelve soldiers with basic tools

Six sections bridge assembled in four hours by thirteen soldier



Technical guide

Step-by-step assembly and installation instructions, from site preparation to bridge launching

Includes a complete bill of materials (BOM) of the components, hardware and tools





With the horizontal launching system, the bridge installation requires no heavy machinery.

Bridge in a Box

Sturdy and optimized for travel



Easy shipping

- Standard off-the-shelf components ready to be shipped worldwide
- Shipped in a standard size 20' (6 m) container
- Much lower shipping costs than steel structures
- Delivery is four to eight times faster than for conventional welded bridges

The container is designed to protect components during transport and arranged for easy access once at destination.

↓ LVTB-2418



Custom Trailer

Multiple configurations for all eventualities



Specifications

Built to be transported by a utility task vehicle.

Quickly adjusts to streamline the transport of components in up to 4 different configurations.

Adapts to fit the bridge and can expand in width from 6' 6" to 10' 2" (1.83 m to 3.10 m).

Each trailer has a maximum load of 1,500 lb (680.4 kg).

Customized area for storing tools.





The weld-free system
allows on-site repairs
without any specialized
labour.


Varied Structures



Turnkey aluminum
solutions

Durable and tough

Long-term savings

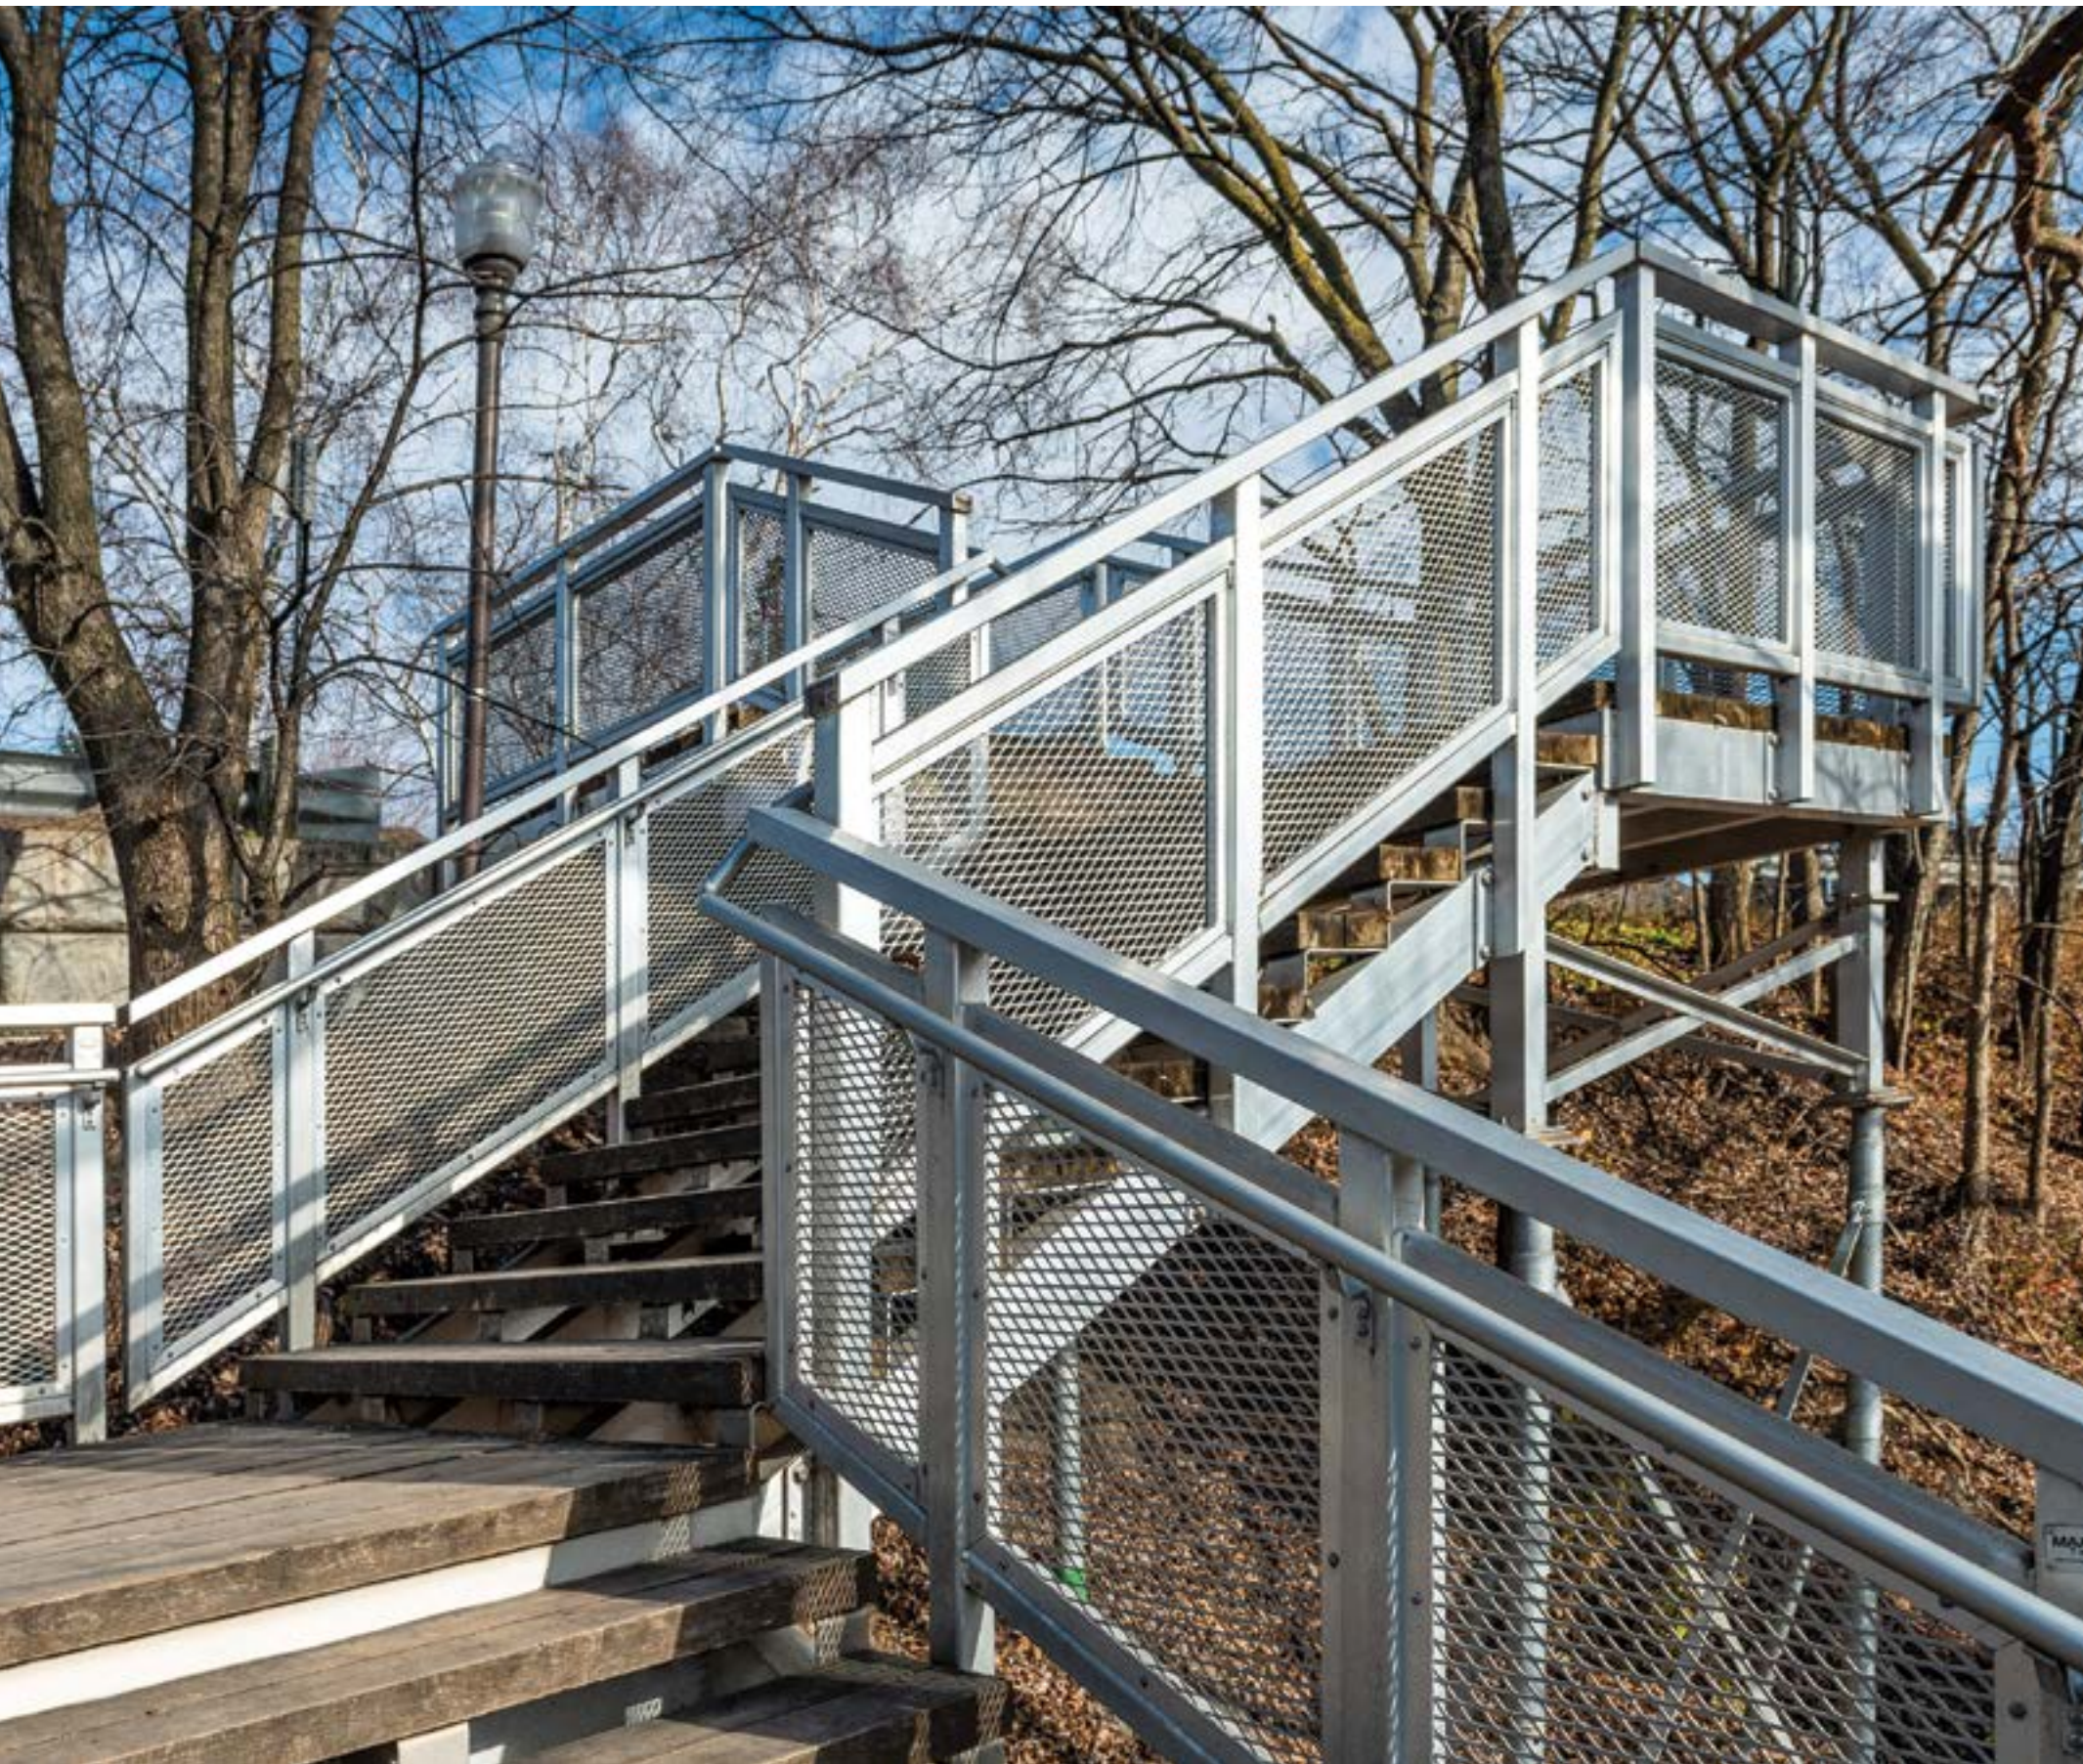

Tailored Designs

MAADI Group designs and manufactures custom aluminum structures that are strong, durable and corrosion resistant.

Tell us about your project and our engineers will work out a solution perfectly suited to your needs. Our custom solutions are designed and manufactured to the highest structural and safety standards.

← Parc de la Rivière Beauport stair & guardrail, Quebec City, Quebec

Projects



Stairs

Parc de la rivière Beauport, Quebec City, Quebec



Height 50' (15 m)	Pedestrian load 100 psf (4.8 kPa)	Self-weight 27,340 lb (12,500 kg)	Options Pressure-treated pine wood decking, aluminum expanded mesh guardrails and handrails
Clear width 6' 7" (2 m)	Vehicular load N/A	Wind pressure 8.5 psf (410 Pa)	



Design/build
of a set of stairs
& guardrails



Canopies

International Cruise Ship Terminal, La Baie, Quebec



Design/build
of canopies &
guardrails



Lenght 20' 10" (76 m)	Clear height 6' 7" (2 m)	Self-weight 14,610 lb (6,640 kg)	Options Aluminum guardrails with vertical pickets railings, vinyl canopies
Clear width 6' (1.83 m)	Vehicular load N/A	Wind pressure 7.9 psf (380 Pa)	



Display Panel

Centre Saint-Charles, Montreal, Quebec

Design/build of display panel board for a mural



Dimensions 97' 2" x 13' 7" (29.6 m x 4.1 m)	Pedestrian load N/A	Self-weight 3,630 lb (1,650 kg)	Options N/A
Clear width N/A	Vehicular load N/A	Wind pressure 8.8 psf (420 Pa)	

Snow Removal Platform

Montreal, Quebec



Design/build of a semi-trailer snow removal platform



Overall span 53' (16.2 m)	Pedestrian load 60 psf (3 Pa)	Bridge self-weight 3,620 lb (1,650 kg)	Options Aluminum “Shur-Grip” decking, expanded mesh guardrails & kick plates
Clear width 3' (0.9 m)	Vehicular load N/A	Wind pressure 8.4 psf (410 Pa)	



Work Platforms

Boucherville, Quebec



Overall span 40', 20' & 13' (12.2 m, 6.1 m & 4 m)	Pedestrian load 50 psf (2.4 Pa)	Bridge self-weight 6,120 lb (2,780 kg)	Options Aluminum “Shur-Grip” decking, guardrails with midrails & kick plates
Clear width 6', 4' & 2' 11" (1.8 m, 1.2 m & 0.9 m)	Vehicular load N/A	Wind pressure N/A	



Design/build of
a set of mobile &
fix work platforms

Lifting Equipment

↓ Aluminum aerial lifts, Montreal, Quebec



Our lifting equipment is designed for heavy-duty daily use to enhance worker productivity.

MAADI Group provides tough, dependable lifting equipment to withstand heavy daily use by industrial plant and factory personnel. Our lifting equipment includes rugged mud buckets, spreader bars, lifting beams, material baskets, personnel platforms and lifters. Our engineering team adapts each design to your specific needs and technical requirements, using advanced techniques to create a customized product that enables maximum workplace efficiency, safety and productivity.

MAADI Group aerial lifts are designed and manufactured to the most stringent structural and safety standards. We deliver cost-effective, top-quality lift equipment that adds exceptional durability and value to your work site. Every aspect of our lift equipment, including the work platform, basket and attachment parts are designed by our engineers and are fully certified in writing with a conformance certificate for each product.

↓ Aluminum aerial utility lift



↓ Aluminum industrial lift



MAADI Group

526, Guilbault St.
Mascouche (Quebec)
Canada J7L 3K9

T 450.449.0007

T 866.668.2587

www.maadigroup.com

info@maadigroup.com

MAADI Group reserves the right to make changes including to specifications, content or descriptions at any time and without notice.

MAADI Group®, GuarDECK®, and MakeABridge® are registered trademarks of the MAADI Group.

© 2025 MAADI Group. All rights reserved.